

J

DRAWING NUMBER
S2271

SIZE
A

SCALE:
NONE

DATE:
5-17-85

APPROVED BY:
TD

CHECKED BY:
TD

DRAWN BY:
TWK


2271, 2276

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA


FLOOR DRAINS

Free Area
13 SQ IN
(84 SQ CM)

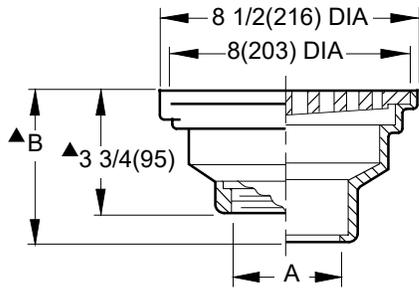

- Fig. 2271C. . . . CAULK OUTLET
- Fig. 2271Y. . . . NO-HUB OUTLET
- Fig. 2271T. . . . THREADED OUTLET

A SIZE	02(50)	03(75)	04(100)
B	5(125) for Caulk, NO-HUB and Speedi-Set®. 3 1/2(89) for Threaded.		

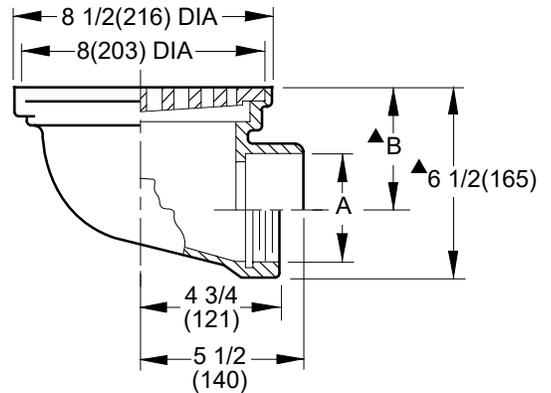

- Fig. 2276C. . . . CAULK OUTLET
- Fig. 2276T. . . . THREADED OUTLET

A	B
SIZE	SIZE
02(50)	4 3/4(121)
03(75)	4 1/4(108)
04(100)	3 3/4(95)

▲Add 1/8"(3) when bronze top is specified.

REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing Collar with Medium Duty Cast Iron ADA Tractor Grate.

**For Heavy Duty: Specify Ductile Iron Grate -M.

VARIATIONS:

- Sediment Bucket -B
- Vandal Proof Top -U
- Flat Bottom Strainer -FBS (Fig. 2271 only)
- Bar Grate (Specify Fig. 2270)
- NO-HUB Adaptor -Y (Fig. 2276 only)
- L Speedi-Set® Service Weight (Fig. 2271 only)
- LXH Speedi-Set® Extra Heavy (Fig. 2271 only)
- 1/2 (13) Trap Primer Connection -P050
- Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2271 Only)
- Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19)

OPTIONAL MATERIALS:

- Galvanized Cast Iron -G
- Polished Bronze Top -PB
- Nickel Bronze Top -NB
- Ductile Iron Grate -M

NOTE Dimensions shown in parentheses are in millimeters.

J H G F	1-8-24 6-15-23 3-10-23 8-13-20	Revised Variations Rev. Regularly Furnished Added ® to "Speedi-Set" Rev. Options, Var., Opt. Mat.	HS HS KK MW	CB CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2271, 2276
REV.	DATE	DESCRIPTION	BY	CKD. BY			