
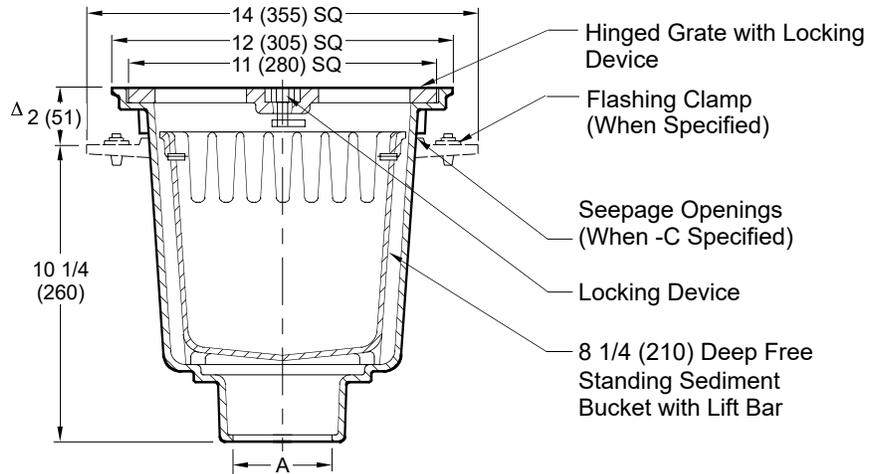


TRAFFIC FLOOR DRAINS

SQUARE TOP DRAINS WITH FREE STANDING SEDIMENT BUCKET

Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard.
For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

Free Area
27 SQ IN
(174) SQ CM

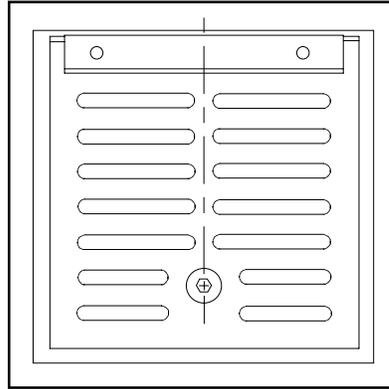

A (Pipe Size) = 03(75), 04(100), 05(125) or 06(150)

- Fig. 2410C ... LESS FLANGE ... CAULK OUTLET
- Fig. 2410Y ... LESS FLANGE ... NO-HUB OUTLET
- Fig. 2415C ... WITH FLANGE ... CAULK OUTLET
- Fig. 2415Y ... WITH FLANGE ... NO-HUB OUTLET

Δ add 3/16" (5) when bronze top is specified.

REGULARLY FURNISHED:
Duco Cast Iron Body with Hinged ADA Grate, Locking Device and Sediment Bucket.

VARIATIONS:

- Flashing Clamp -C (Fig. 2415 only)
- Loose Set Grate -LSG
- Vandal Proof Grate -U
- L Speedi-Set® Service Weight
02(50), 03(75) & 04"(100) Sizes only
- LXH Speedi-Set® Extra Heavy
02(50), 03(75) & 04"(100) Sizes only
- Quad Close Trap Seal (Specify Fig. 2692)
- Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19)

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER **S2410**
 SIZE **A**
 SCALE: **NONE**
 DATE: **5-22-89**
 APPROVED BY: **SB**
 CHECKED BY: **McD**
 DRAWN BY: **CMB**
2410, 2415
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

M L K J	1-8-24 3-13-23 1-23-23 7-25-19	Revised Variations Added @ to "Speedi-Set" Added ADA Added Load Rating	HS TBW KK MW	CB CL JT JM	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2410, 2415
REV.	DATE	DESCRIPTION	BY	CKD. BY			