

1077-OFD
 DRAWING NUMBER S1077-OFD
 SIZE A
 SCALE: NONE
 DATE: 9-17-09
 APPROVED BY: AM
 CHECKED BY: AM
 DRAWN BY: RN
 FIGURE NUMBER

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com
 CUSTOMER DRIVEN SINCE 1926

ISO 9001 REGISTERED
ASPE
 MEMBER OF:
 ISO 9001 REGISTERED
 A Quality Rubber Floor Unit

LOCATION

DEEP SUMP ROOF DRAIN WITH DUAL OUTLET

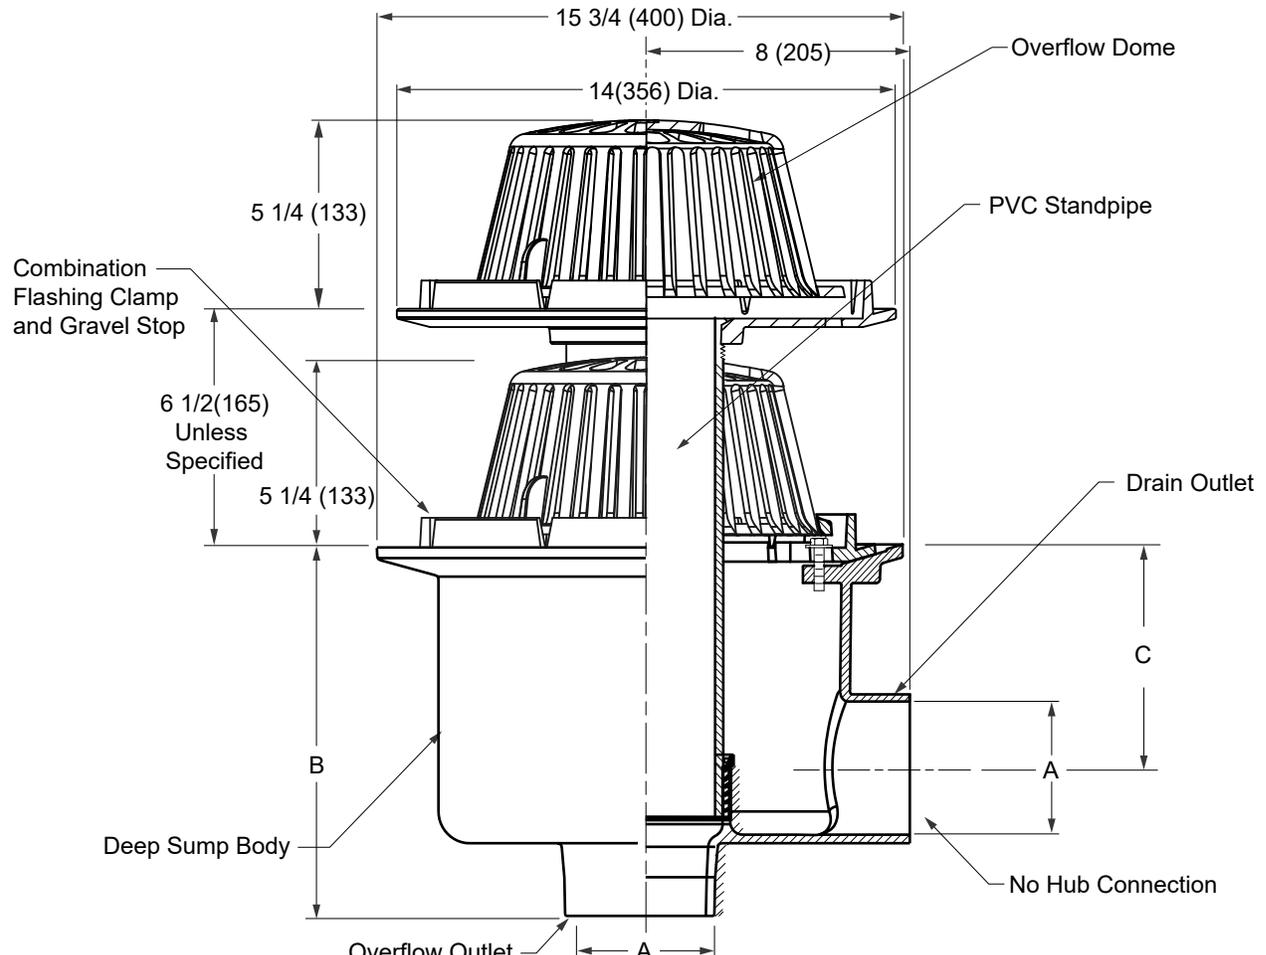


Fig. 1077Y(-OFD).....No-Hub Outlet

Recommended Deck Opening

with suffix -RDP	17 (430) Dia.
less suffix -RDP	15 (381) Dia.

Pipe Size	A	B	C
02(50)	10 3/4(273)	7 1/2(191)	
03(75)	10 3/4(273)	7(178)	
04(100)	10 3/4(273)	6 1/2(165)	
06(150)	11 1/8(282)	5 1/2(140)	

NOTE: Stated flow rates for roof drains are based on particular test piping configurations and dimensions. Installed roof drain flow rates cannot be stated unless the attached piping configuration is known and the effects of the drainage calculated.

REGULARLY FURNISHED:
 Duco Coated Cast Iron Body with Side Outlet Drain Connection and Bottom Outlet Overflow Connection with Standpipe Type Overflow and Dome, Combined Flashing Clamp and Gravel Stop and Cast Iron Dome.

- VARIATIONS:**
- Vandal Proof Dome -U
 - Top Mount Deck Plate -RDP
 - Extension -E
 - Gravel Guard -GG (Specify Height)
 - Cast Iron Standpipe -CIS
 - Sump Receiver -R
 - Under Deck Clamp -C

- OPTIONAL MATERIALS:**
- Polyethylene Dome -PD
 - Rough Bronze Dome -RB
 - Stainless Steel Mesh Covered Dome -SSM
 - Galvanized Cast Iron -G

NOTE: Dimensions shown in Parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
	3-6-25 4-25-23 7-21-22 1-22-19	Revised Optional Materials Revised Drawing Rev. Drawing Revised Table, Callouts	HS KK KB	KV CL CL			1077-OFD