

springH2O[®]
BOTTLE FILLERS BY MURDOCK[®]

BF158S Bottle Filler

REFRIGERATED PUSHBUTTON OPERATED
VANDAL RESISTANT WALL MOUNTED
STAINLESS STEEL BOTTLE FILLER

STANDARD FEATURES

- Heavy Gauge Type 304 Stainless Steel Construction
- Vandal Resistant Seamless Stainless Steel Alcove
- ADA Compliant
- Lead-Free
- Pushbutton Operation
- Laminar Flow Nozzle 1.2 GPM (4.54 l/min) at 70 PSI
- Fold Down Housing for Easy Maintenance Access
- Back Panel and Louvered Grille
- Mounting Frame (A0000000-MF21)
- Chiller includes Water Leak Detection Auto Shut-Off Valve

SUGGESTED SPECIFICATIONS

Refrigerated Pushbutton Operated, Vandal Resistant, Stainless Steel, Wall Mounted Bottle Filler shall be Murdock[®] model BF158S. Bottle Filler shall deliver a minimum of 8.0 GPH (30.3 LPH) of water at 50°F (10°C) cooled from 80°F (26.7°C) inlet water and 90°F (32.2°C) ambient. Cooling system shall use R-134a refrigerant and be capillary tube regulated. Chiller shall include Factory installed Water Leak Detection Auto Shut-Off Valve. Bottle Filling unit shall include Pushbutton Operated activation. Bottle Filler shall provide 1.2 GPM (4.54 l/min) flow rate with a Laminar Flow Spout to minimize splashing. When installed properly, the Bottle Filler complies with ADA forward and side reach requirements. Bottle Filler Housing construction to be heavy gauge, type 304 stainless steel with exposed surfaces polished to a #4 satin finish.

Unit shall be complaint to the Air Conditioning and Refrigeration Institute Standard 1010 and shall be listed by Underwriters Laboratories for both the US and Canada and is to be compliant to ANSI/ASHRAE 18. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately. Optional WF3000 PFAS Water Filter shall have 3000 gallon capacity with 3rd Party Certification for Lead, Bacteria, Chlorine, Microplastics, and NSF/ANSI for Cyst and total PFAS reduction.

Complies with the following standards:



Federal Public Law 111-380 (No Lead)



NSF/ANSI/CAN 61-2020

ANSI/ASHRAE 18

(220V Compressor Only)



Model BF158S Shown
U.S. Patent D1,062,348 S

Model BF158S Shown "RATED FOR INDOOR USE"

MODEL:

- BF158S Refrigerated Pushbutton Operated Stainless Steel Wall Mount Bottle Filler

OPTIONS: (Additional costs may apply)

- EG22 Enviro-Glaze[®] Matte Black Powder Coat
- 220V 220 volt / 50 Hz or 60Hz Compressor (C€)

ACCESSORIES: (Additional costs may apply)

- LOGO Customer Specified Logo / Graphics
- WF3000 3000-gallon PFAS Water Filter ¹
NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics

NOTES:

1 - Refer to Supplemental Submittal Sheet for Complete Details.

Water Chiller Specifications:				Full Load Amps	Approx. Shipping Weight
Model Number	GPH*	Rated Watts			
A9100080-A	8.0	390	4.6	80 lbs.	

* GPH of 50°F water at 90°F ambient room temperature and 80°F inlet water temperature. Compressor motor operates on 115 Volt / 60 Hz single phase.

NSF/ANSI/CAN 61: Q ≤ 1

NSF/ANSI/CAN 61 Compliant including lower lead leaching criteria.


[3000 Gallon PFAS Filter Certifications](#)

[Product Warranty](#)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

BF158S Bottle Filler

REFRIGERATED PUSHBUTTON OPERATED
VANDAL RESISTANT WALL MOUNTED
STAINLESS STEEL BOTTLE FILLER

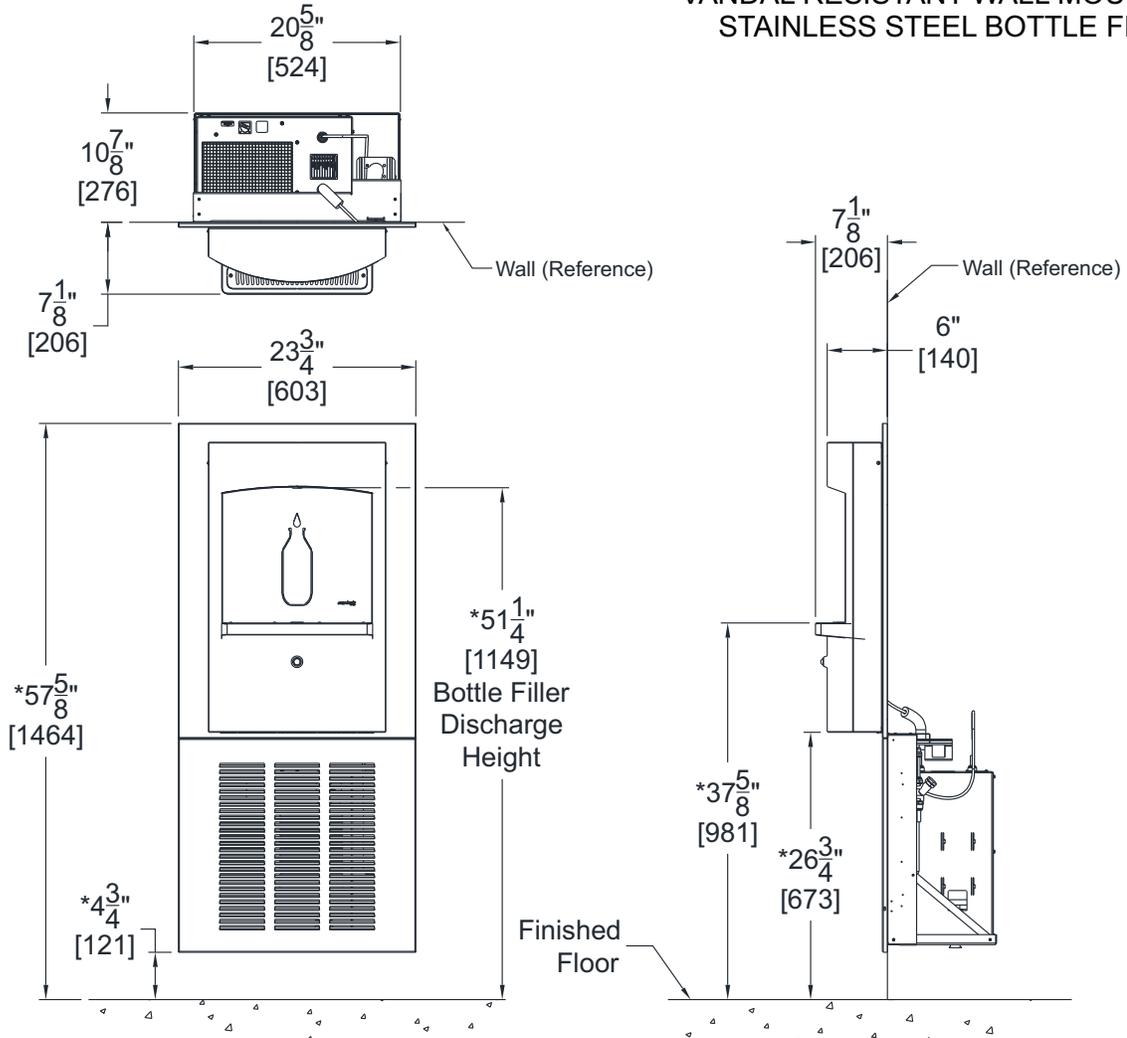

1. Dimensions are in Inches [mm]
2. * Dimensions shown are for recommended adult height. Adjust vertical dimensions as necessary to comply with Federal, State & Local Codes

NOTE: ADA Compliant when installed correctly. Refer to ADA Standards for Accessible Design for complete Installation Requirements particularly if located on an Accessible Route or Circulation Path. Compliance is subject to the Interpretation and Requirements of the Local Code Authority.

IMPORTANT: Dimensions are shown for reference only. Refer to product Installation Manual for complete details prior to Rough-in.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock[®] assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock[®] Mfg., Member of Morris Group International[®]. Please visit www.murdockmfg.com for most current specifications.