



Whitehall Manufacturing®
Manufacturer of Healthcare and Rehabilitation Products since 1946

Division of
Acorn Engineering Company®



A MEMBER OF



Slant Back Whirlpools

Use



SB Series 100 Gallon Slant Back Mobile Whirlpool

WHSB-100-M



WHSB-100-M

Whitehall WHSB-100-M Slant Back Mobile Whirlpool

Tank Capacity is 100 gallons.

Whirlpool Tank is 76"L x 40"W x 24"D and is seamless welded construction, fabricated from heavy gauge, type 304 stainless steel, polished to a satin finish. The tank features a slant back to allow the user to recline during Whirlpool use. A 3" wide rim allows the user to also rest their arms while soaking. Tank bottom is seamless, coved (rounded) design for effective cleaning.

Turbine Raising and Lowering Device permits adjustment of desired height and direction of water agitation towards the area of the body during Whirlpool use. It is spring balanced and provided with a locking device.

Turbine Assembly functions both as agitator and emptying device. It is equipped with Underwriters Laboratory listed 1/2 HP pump motor protected with an ABS plastic shell, automatic thermal overload protector, and lifetime-sealed bearings. All parts contacting the water are stainless steel, chrome plated brass or bronze.

Drain option -SDP has a bottom drain, leading to a separate, concealed water evacuation pump. A hose is attached to the side of the unit to facilitate the evacuation.

Thermometer is provided with a dual scale, adjustable calibration. Stem inserts into a retainer to prevent rattle during whirlpool agitation.

GUIDE SPECIFICATIONS

Provide Whitehall Mobile Whirlpool (specify model number and options) with a 100-gallon capacity, 76"L x 40"W x 24"D. Whirlpool shall be fabricated from heavy gauge, type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall be polished to satin finish. The tank features a slant back to allow the user to recline to facilitate hydrotherapy. The 3" rim allows the user to rest their arms during use. Bottom of tank shall be a seamless, rounded coved design. Provide a turbine assembly with raising and lowering device which functions both as agitator and emptying device, permits adjustment of desired height, direction of water agitation, and can be locked into place. Turbine assembly shall be UL listed 1/2 HP pump motor with automatic thermal overload protector and lifetime-sealed bearings. Provide a 3" dial thermometer with a stem retainer to prevent rattle when whirlpool is in operation.

Please visit www.whitehallmfg.com
for most current specifications.



Whitehall Mfg. • P.O. Box 3527 • City of Industry, CA 91744 • (800) 591-9280 • (626) 968-6681

WHSB-100-M

NEW: 10/29/2025



MODEL NUMBER AND OPTION SELECTIONS

Series

WHSB Slant Back Series

Capacity

-100 Gallons

Type

-M Mobile Whirlpool

Turbine Electrical Requirements

115VAC / 60Hz (6.2 AMPS)

230VAC / 50Hz (3.5 AMPS)

Country of Use _____

For Mixing Valve:

Refer to supplemental MXT15-OTG and DU-1 sheet for details.

Suffix Options (See Whirlpool Options Section for Details)

-ADH Auxiliary Drain Hose Assembly


-EG Enviro-Glaze® Color Powder Coating - Specify Color: _____

<https://www.whitehallmfg.com/enviro-glaze>

-GFI Ground Fault Interrupter

-LOGO Applied Logos: Team, Facility, Company Logo

-SDP Separate Drain Pump

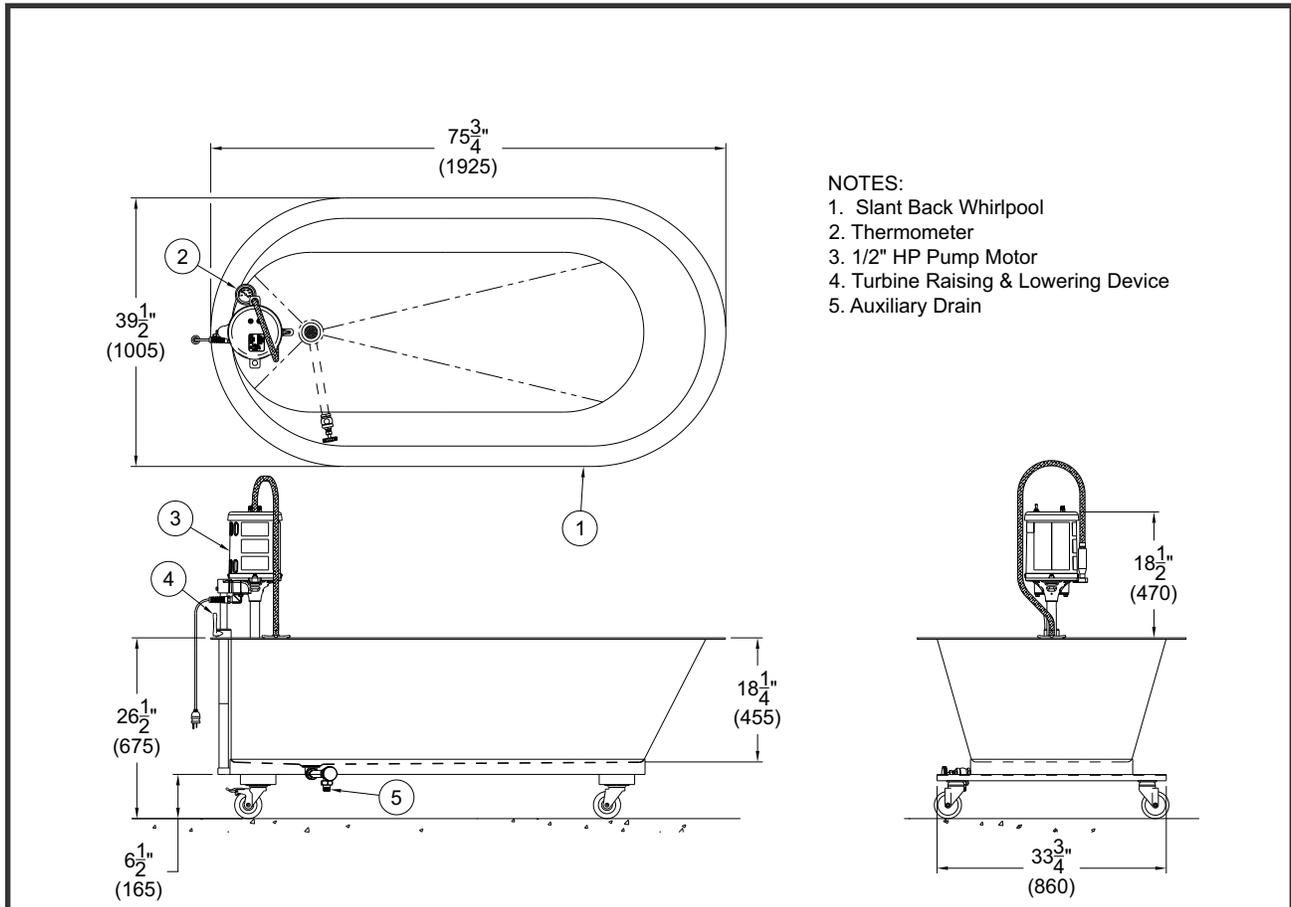

NOTES:

1. Slant Back Whirlpool
2. Thermometer
3. 1/2" HP Pump Motor
4. Turbine Raising & Lowering Device
5. Auxiliary Drain

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
 Company _____ Date _____
 Contact _____ Title _____
 Approval for Manufacturing/Signature _____

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data © Whitehall Manufacturing, Member of Morris Group International. Please visit www.whitehallmfg.com for most current specifications.