


OVERFLOW ROOF DRAINS

12" (305) DIAMETER - LOW PROFILE DOME

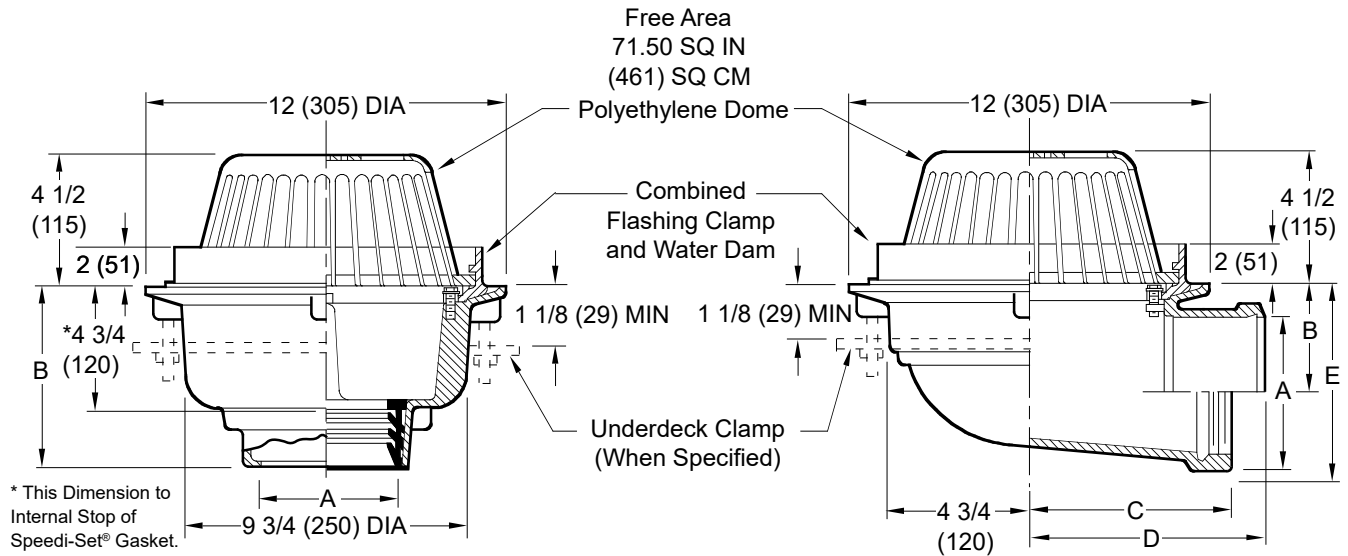

☐ Fig. 1310C -WD02 . . . CAULK OUTLET
☐ Fig. 1310Y -WD02 . . . NO-HUB OUTLET
☐ Fig. 1310T -WD02 . . . THREADED OUTLET

A SIZE	02 (50)	03 (75)	04 (100)	05 (125)	06 (150)
B	6 (150) for Caulk, NO-HUB and Speedi-Set® 4 3/4 (120) for Threaded				

recommended deck opening	
with suffix -R	13 (330) DIA
less Suffix -R	11 (280) DIA

☐ Fig. 1320C -WD02 . . . CAULK OUTLET
☐ Fig. 1320Y -WD02 . . . NO-HUB OUTLET
☐ Fig. 1320T -WD02 . . . THREADED OUTLET

A SIZE	02 (50)	03 (75)	04 (100)
B	4 1/2 (115)	4 (100)	3 1/2 (89)
C	6 (150)	6 (150)	6 (150)
D	10 (254)	9 3/4 (248)	9 5/8 (244)
E	6 1/2 (165)	6 5/8 (168)	6 5/8 (168)

REGULARLY FURNISHED:

Duco Cast Iron Body with Combined Flashing Clamp and Water Dam with Polyethylene Dome.

VARIATIONS:

- ☐ Expansion Joint (Specify Fig. 1710 Fig. 1310 only)
- ☐ Extension -E (Specify Height)
- ☐ "L" Shaped Underdeck Clamp -CL
- ☐ L Speedi-Set® Service Weight 02(50), 03(75) & 04"(100) sizes only (Fig. 1310 only)
- ☐ LXH Speedi-Set® Extra Heavy 02(50), 03(75) & 04"(100) sizes only (Fig. 1310 only)
- ☐ NO-HUB Adaptor (Specify Fig. 2646Y Fig. 1320 only)
- ☐ Secondary Flashing Clamp -C2
- ☐ Sump Receiver -R
- ☐ Underdeck Clamp -C
- ☐ Vandal Proof Dome -U
- ☐ Stainless Steel Mesh Over Dome -SSM
- ☐ Roof Deck Plate -RDP
- ☐ 02 1/2(64), 03(76), 04(102), 05(127), or 06(152) Water Dams Available -WD025, -WD03, -WD04, -WD05, -WD06

OPTIONAL MATERIALS:

- ☐ Aluminum Dome -AD
- ☐ Cast Iron Dome -CID
- ☐ Galvanized Cast Iron Body & Collar -G
- ☐ Galvanized Cast Iron Dome -CIDG
- ☐ Rough Bronze Dome -RBD

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER
S1310-WD02, 1320-WD02

SIZE
A

SCALE:
NONE

DATE:
5-6-85

APPROVED BY:
CL

CHECKED BY:
CL

DRAWN BY:
TB

1310-WD02, 1320-WD02

FIGURE NUMBER

REV. DATE DESCRIPTION BY CKD. BY

WEIGHT
POUNDS

VOLUME
CUBIC FEET

FIGURE NUMBER
1310-WD02
1320-WD02



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov