



## Secur-Care® - Ligature Resistant LR2898 Series Flush Valve Access Panel



LR2898

Fixture May Show Some Available Options

### Ligature Resistant Flush Valve Access Panel

The **Acorn Flush Valve Access Panel** is recommended for use with **non-ADA** toilets as well as ADA and non-ADA urinals, and floor drains with concealed flush valve connections where vandalism is a concern. The Flush Valve Access Panel design provides easy access to the concealed flush valve when no access is available behind the wall.

**Mounting Frame** is welded construction and is fabricated of type 304, 14 gauge stainless steel. The front of the mounting frame is provided with panel anchoring nuts. The frame includes nail holes to secure the frame through the side flange to wall construction.

**Hydraulic Flush Valve** provided is a concealed type with cast bronze body. Flush valve features quiet operation and includes a suicide resistant button, union angle stop and vacuum breaker. Flush Valve is Sloan Royal 952 Series (Designed to suit application; subject to change without notice).

**Removable Access Panel** cover is fabricated of 14 gauge type 304 stainless steel with exposed surfaces having a satin finish and is secured to mounting frame with tamper-resistant stainless steel button head screws. Panel includes a proprietary Ligature Resistant pushbutton or pushbutton adapter assembly.

#### GUIDE SPECIFICATION

Provide and install Secur-Care® Ligature Resistant Flush Valve Access Panel frame fabricated of 14 gauge stainless steel with 14 gauge panel cover. All exposed stainless steel surfaces shall have a satin finish. Access Panel cover is secured with stainless steel vandal resistant fasteners. Mounting hardware and piping shall be by others.



# Secur-Care® - Ligature Resistant LR2898:

Ligature Resistant Flush Valve Access Panel

**MODEL OF FIXTURE FOR APPLICATION:** \_\_\_\_\_

### WALL THICKNESS AND TYPE (Must Specify)

Thickness: \_\_\_\_\_ Type:  Concrete  Block  Steel

### MODEL NUMBER AND OPTIONS SELECTION

#### BASE MODEL NUMBER

LR2898 Ligature Resistant Flush Valve Access Panel

#### FLUSH VALVE GPFs (Toilet, Must Specify)

- 1.28 GPF (HET)
- 1.6 GPF (Not Available in California)
- 3.5 GPF (Not Available in California)

#### FLUSH VALVE GPFs (Urinal, Must Specify)

- 0.128 GPF (HEU)
- 0.5 GPF (Not Available in California)
- 1.0 GPF (Not Available in California)
- 1.5 GPF (Not Available in California)
- 3.5 GPF (Not Available in California)


#### Flush Valve Type (Must Specify)

- Electronic
  - EVSFV Master-Trol®
  - EVSPFV Master-Trol® with Piezo Button
  - MTPFV Master-Trol® Plus
  - MTPPFV Master-Trol® with Piezo Button
  - Electronic Valve by Others (Acorn Style "D" Punching std)
- Size \_\_\_\_\_ Shape \_\_\_\_\_


#### PRODUCT OPTIONS

- EG Enviro-Glaze Color, Specify: \_\_\_\_\_
- LPFV Less Flush Valve Punching



Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

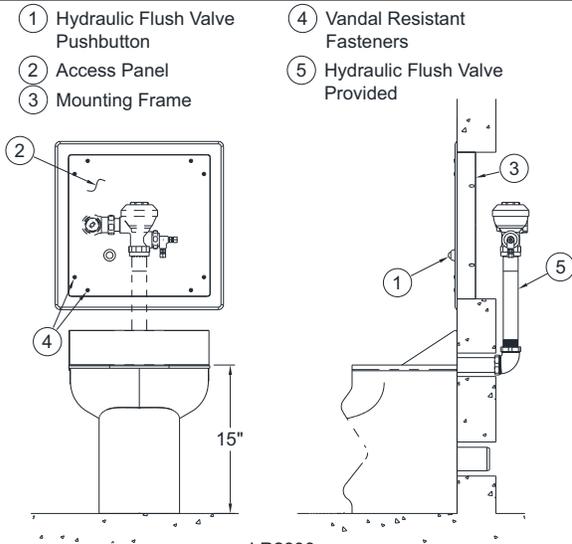

LR2898  
Shown with non-ADA Toilet

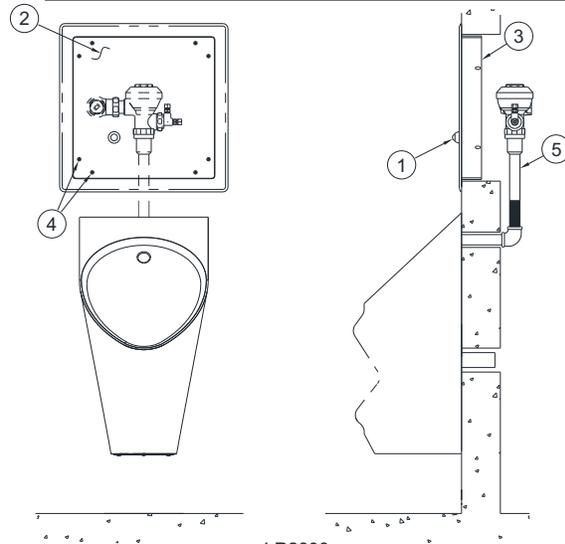

LR2898  
Shown with Urinal

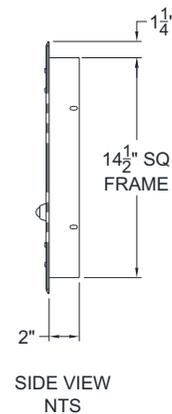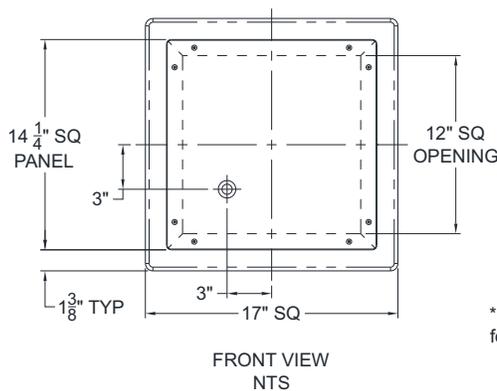

\*Flush Valve not shown for clarity

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

<p><b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2010 Acorn Engineering Company</p>	
<p><b>Selection Summary</b></p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p><b>Approved for Manufacturing</b></p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>