

WFS SERIES WATER FILTRATION SYSTEM

SURFACE MOUNTED, VANDAL RESISTANT COVER TO CONCEAL AND MAINTAIN REMOTE WATER FILTERS

STANDARD FEATURES

- Includes [Murdock WF3000 PFAS Certified Filters](#)
- Two Stage Hollow Core Fiber & Carbon Block Technology Provides Superior Filtration versus Single Stage Designs
- 18 Gauge Stainless Steel Surface Mounted Box
- Easy Access for Filter Replacement
- Hinged Fold Down Cover with Cylinder Lock And Key
- 1/2" Flexible Metal Conduit For Supply To Fixture

SUGGESTED SPECIFICATIONS

Provide Murdock Water Filtration System (Insert Model) to enhance water purity. Filtration Unit to include [dual, single] Murdock WF3000 PFAS Filters. Each filter shall have up to 3000 gallon capacity. Filter(s) shall be fully assembled and held in place within Housing. Provide 1/4" O.D. X 72" long LLDPE Water Inlet Supply and Outlet Tubing with 1/2" Type EFL Flexible Conduit X 72" long to shield Water Supply Outlet line. Cover shall be fabricated of 18 gauge type 304 stainless steel with exposed surfaces polished to a satin finish. Housing shall include 16 gauge Back Plate punched for Wall mounting and Hinged Front Cover with Cylinder Lock to allow access to service components. Third Party Filter certifications shall include compliance to ASTM F838-20 and NSF/ANSI 42+53 with reduction to 0.1 micron of sediment, chlorine, bacteria (cyst), and lead. Provide total PFAS reduction including PFOA, PFOS, PFHpA, PFHxS, and PFNA. Certifications shall provide compliance with NSF/ANSI 401 for reduction of Microplastics.

Filter Technical Details:

Maximum flow rate is 1.5 GPM (5.7 LPM) per filter, subject to working water pressure. Intended location for installation should be as close as possible to fixtures being served.

- Operating Pressure is not to exceed 105 PSIG (724 kPa).
- Operating Temperature: 35°F - 100°F (4°C - 38°C).
- This system is for cold water use only.

Refer to WF3000 Installation Manual for complete Filter Specifications.

NOTE: Details for connection to Drinking Fountain or Water Cooler fixture (sold separately) will differ based upon model used. Installer to verify install requirements.



(Model WFS-2WF3000 shown)

MODEL:

(Must Specify)

- WFS-2WF3000 FILTRATION SYSTEM - DUAL
(2) WF3000 3000-Gallon PFAS Water Filter
6000 Gallon Capacity/Lifespan
NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics
- WFS-1WF3000 FILTRATION SYSTEM - SINGLE
(1) WF3000 3000-Gallon PFAS Water Filter
3000 Gallon Capacity/Lifespan
NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics
- WFS FILTRATION BOX ONLY (No Filter)
Includes: (2) interior Adjustable Straps, Flexible Conduit Assembly with Inlet and Outlet Supply Tubing.





3000 Gallon PFAS Filter Certifications

Note: Declarations are based upon Third Party Certifications. Information is deemed reliable however, subject to change without notice.

Important: Do not use where the microbiological condition of the water is deemed unsafe or of unknown quality. Provide adequate disinfection before or after the unit.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

WFS SERIES WATER FILTRATION SYSTEM

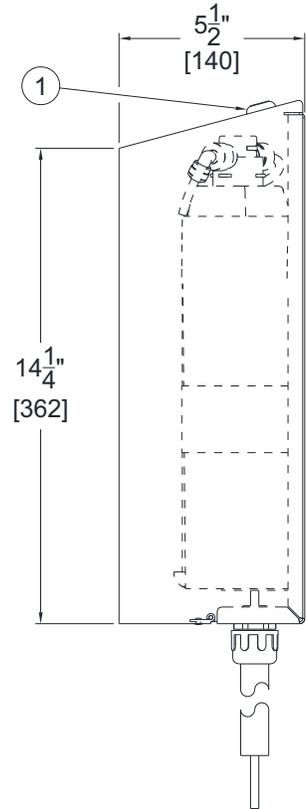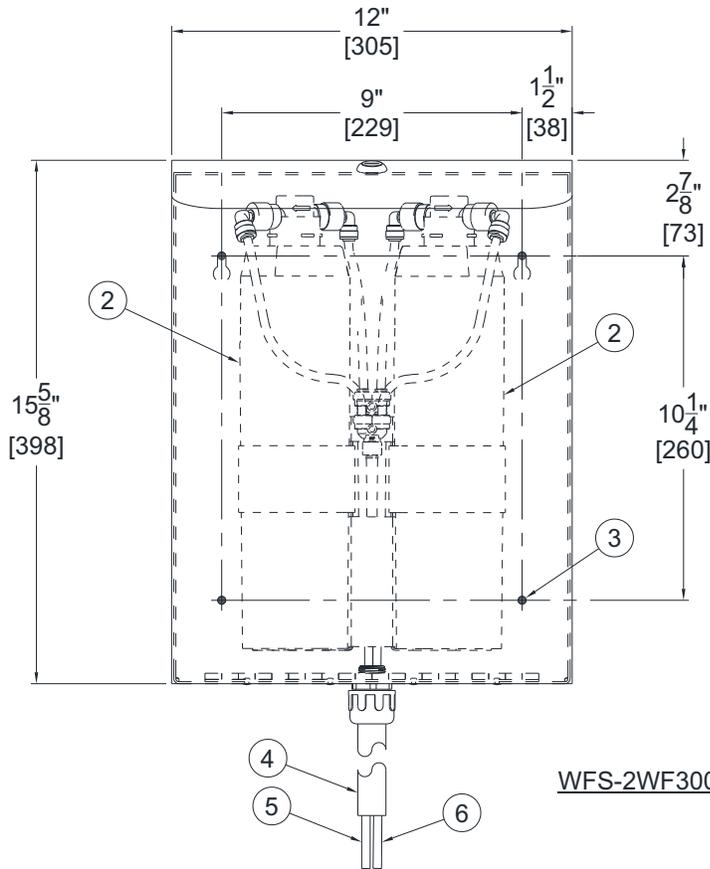

WFS-2WF3000 Model Shown

- ① CYLINDER LOCK
- ② WF3000 PFAS WATER FILTERS
- ③ (4) FOUR Ø1/4" [Ø6] MOUNTING POINTS
- ④ 6 FOOT [1829] FLEXIBLE METAL 1/2" CONDUIT
- ⑤ 6 FOOT [1829] 1/4" O.D. SUPPLY PE TUBING
- ⑥ 6 FOOT [1829] 1/4" O.D. OUTLET PE TUBING

GENERAL NOTES:
1. ALL DIMENSIONS ARE IN INCHES [MM]

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock® Mfg., Member of Morris Group International®, Please visit www.murdockmfg.com for most current specifications.