

TERRAZZO FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

ROUND NICKEL BRONZE TOP WITH TERRAZZO RECESS

DRAWING NUMBER S4185

SIZE A

SCALE: NONE

DATE: 2-16-70


APPROVED BY: JM

CHECKED BY: BH

DRAWN BY: RK

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

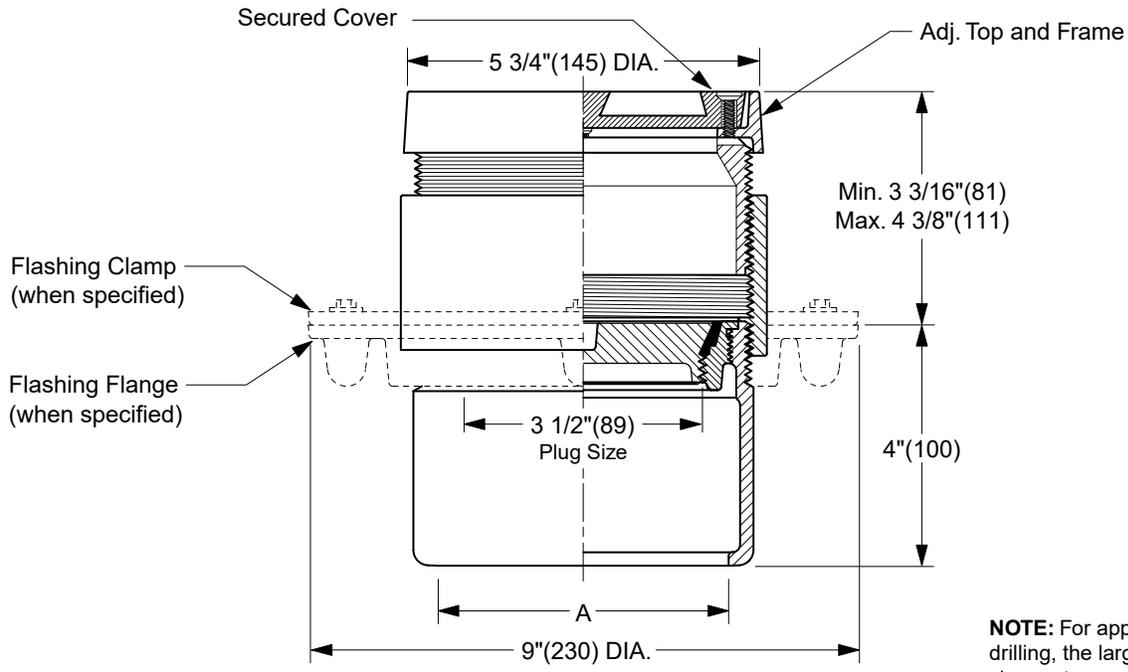

NOTE: For applications using core drilling, the largest diameter of the cleanout assembly is 6 5/16" (160).

TWIS-TO-FLOOR® ADJUSTMENT
INSIDE CAULK OUTLET
"A" (Pipe Size) = 02(50), 03(75) or 04(100)
Conforms to ASME A112.36.2/CSA B79.2

- Fig. 4185C.....Gasket Seal - ABS Plug
- Fig. 4186C.....Gasket Seal - Bronze Plug
- Fig. 4188C.....Taper Thread - Bronze Plug
- Fig. 4189C.....Taper Thread - ABS Plug

(Twis-to-Floor® design shown with gasketed plug.)

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Duco Cast Iron Cleanout with Round Adjustable Secured Nickel Bronze Top with 1/2" (13) Terrazzo Recess. Closure Plug Type as Indicated By Figure Number Selected.

VARIATIONS:

- Flashing Flange -F
- Flange with Flashing Clamp -F-C
- Vandal Proof Top -U

OPTIONAL MATERIALS:

- Galvanized Cast Iron -G
- Polished Bronze Top -PB

| | | | | | | | | | |
|---------------|--------------------|---|--|----------------------|----------------------|-------------------|--------------------|--|----------------------|
| FIGURE NUMBER | 4185 SERIES | | | | | | | | FIGURE NUMBER |
| REV. | DATE | DESCRIPTION | BY | CKD. BY | WEIGHT POUNDS | VOLUME CUBIC FEET | 4185 SERIES | | |
| | N M L K | 4-11-24 8-17-22 1-20-22 12/17/04 | Added ASME Note Removed Function Removed "C.O." cast in" Added Core-Drilling Note | HS HS KK JJ | CL CL CL CL | | | | |