


GENERAL PURPOSE ROOF DRAINS

ROOF DRAIN WITH ADJUSTABLE EXTENSION

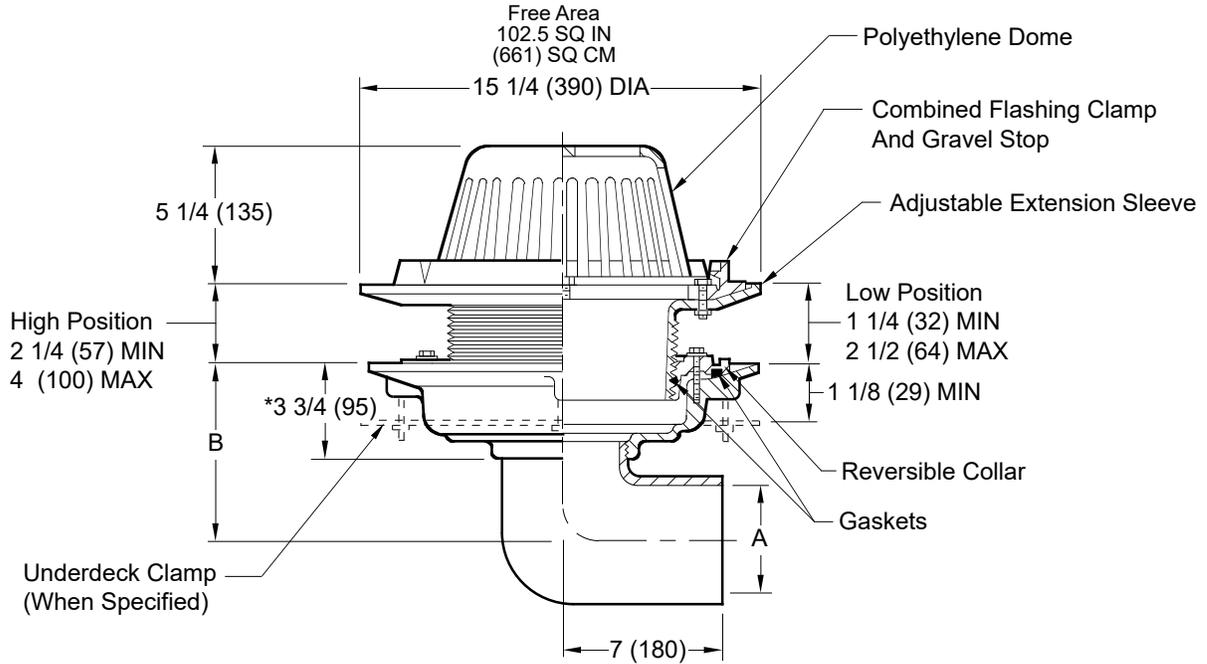

recommended deck opening	
with suffix -R	17 (430) DIA
less suffix -R	14 (355) DIA

- Fig 1025S . . . SPIGOT OUTLET
- Fig 1025T . . . THREADED OUTLET
- Fig 1025Y . . . NO-HUB OUTLET

NOTE: Dimensions shown in parentheses are in millimeters.

A SIZE	02(50)	03(75)	04(100)	05(125)	06(150)
B	5 3/4(146)	6 1/4(159)	6 3/4(171)	7 1/4 (184)	7 3/4(197)

REGULARLY FURNISHED:

Duco Cast Iron Body with Side Outlet Elbow, Adjustable Extension Sleeve, Reversible Collar, Combined Flashing Clamp and Gravel Stop, with Polyethylene Dome.

VARIATIONS:

- "L" Shaped Underdeck Clamp -CL
- Secondary Flashing Clamp -C2 (See 1025-C2 Submittal)
- Sump Receiver -R
- Underdeck Clamp -C
- Vandal Proof Dome -U
- Roof Deck Plate -RDP

OPTIONAL MATERIALS:

- Aluminum Dome -AD
- Cast Iron Dome -CID
- Galvanized Cast Iron Body and Collar -G
- Galvanized Cast Iron Dome -CIDG
- Rough Bronze Dome -RBD

▲ Optional domes' free area are as follows:

Aluminum	98 (632)
Cast Iron	80 (516)
Bronze	95 (613)

DRAWING NUMBER S1025
 SIZE A
 SCALE: NONE
 DATE: 10-30-86
 APPROVED BY: JD
 CHECKED BY: CR
 DRAWN BY: CMB
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 FIGURE NUMBER 1025

P	8-22-24	Revised Variations	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1025
N	7-10-24	Added Fig. Opts., Rev. Table	HS	CL			
M	9-27-23	Removed Function	HS	CL			
L	7-30-19	Removed NOTE	MW	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			