


E
 DRAWING NUMBER **S1001**
 SIZE **A**
 SCALE: **NONE**
 DATE: **2-24-94**
 APPROVED BY: **CS**
 CHECKED BY: **JCS**
 DRAWN BY: **TWK**
 1001
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

UNIVERSAL ROOF DRAIN MEMBRANE CLAMPING COLLAR AND DOME

Free Area
 102.5 SQ IN
 (661) SQ CM

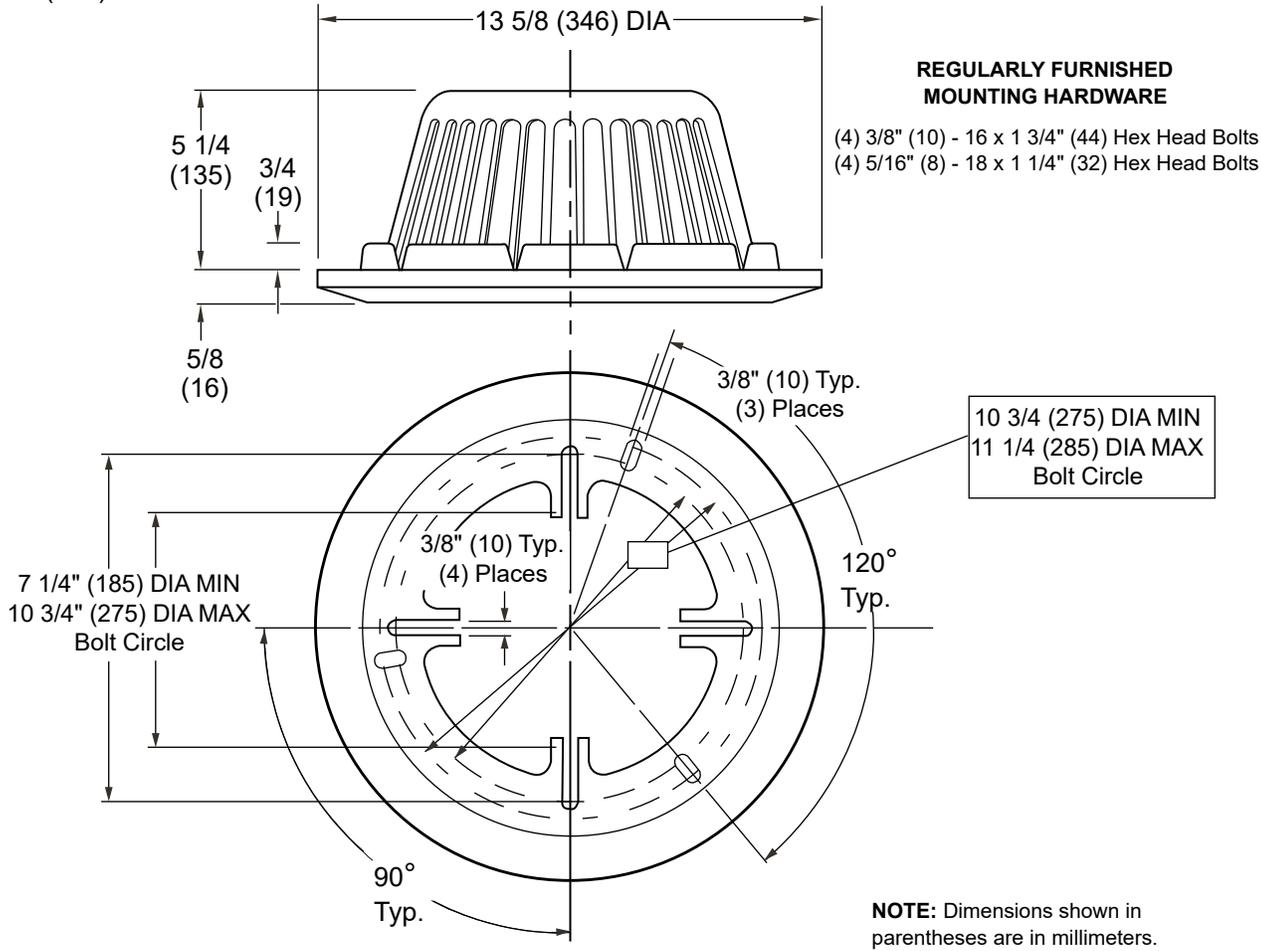

REGULARLY FURNISHED MOUNTING HARDWARE

- (4) 3/8" (10) - 16 x 1 3/4" (44) Hex Head Bolts
- (4) 5/16" (8) - 18 x 1 1/4" (32) Hex Head Bolts

10 3/4 (275) DIA MIN
 11 1/4 (285) DIA MAX
 Bolt Circle

BOTTOM VIEW

REGULARLY FURNISHED:
 Polyethylene "Twist Lock" Dome and Duco Coated Universal Cast Iron Membrane Clamping Collar with Mounting Hardware.

- VARIATIONS:**
- Less Dome -LD (Specify Fig. 1002)
 - Perf. S.S. Gravel Guard (Specify Height)
 - Solid Water Dam Collar -WD (Specify Height)
 - Vandal Proof -U

- OPTIONAL MATERIALS:**
- Aluminum Dome -AD
 - Cast Iron Dome -CID
 - 8" (205) High Cast Iron Dome -CID8
 - Galvanized Collar -CG
 - Galvanized Cast Iron Dome -CIDG
 - Rough Bronze Dome -RBD
 - S.S. Mesh Covered Dome -SSM (Specify Dome)

NOTE: Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
E D C B	9-27-23 5-26-99 6-12-95 7-19-94	Removed Function Revised Opt. Materials Added Millimeters Submittal Update	HS CMD EMB EMB	CL BS BS BS			1001