


# FLOOR OR SHOWER DRAINS WITH ADJUSTABLE STRAINER HEADS

Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

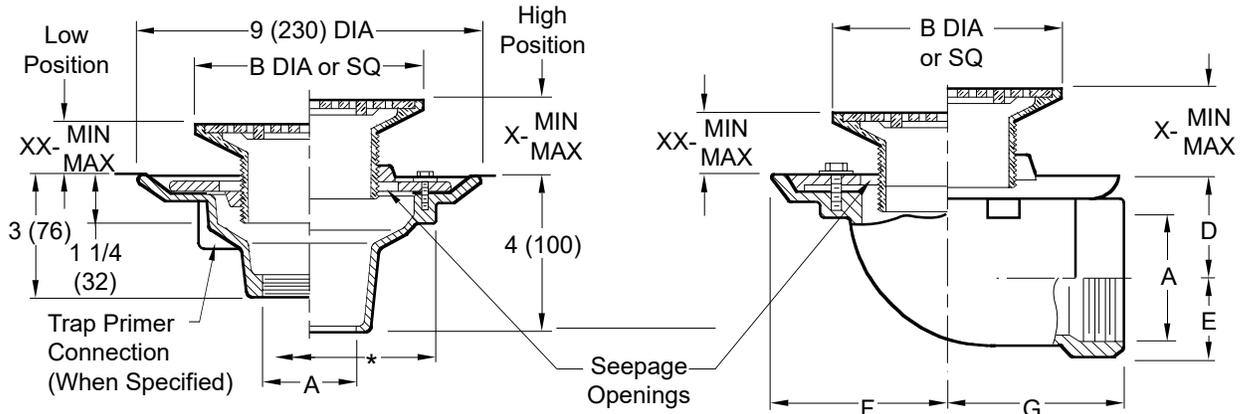

A (Pipe Size) = 02(50), 03(75) or 04(100)

### CAULK OUTLET

- Fig. 2010C ..... (A) ROUND TOP
- Fig. 2010C ..... (B) SQUARE TOP

### THREADED OUTLET

- Fig. 2015T ..... (A) ROUND TOP
- Fig. 2015T ..... (B) SQUARE TOP

Strainer Size	*Collar In High Position		*Collar In Low Position		Free Area SQ IN (SQ CM)	
	X		XX		ROUND	SQUARE
B	X		XX			
DIA or SQ	MIN	MAX	MIN	MAX		
05 (125)	1 1/4 (32)	2 1/4 (57)	3/4 (19)	1 5/8 (41)	7 (45)	6.5 (42)
06 (150)	1 1/4 (32)	2 1/4 (57)	3/4 (19)	1 5/8 (41)	9 (58)	12.5 (81)
07 (180)	1 1/4 (32)	2 1/4 (57)	7/8 (22)	1 7/8 (48)	14 (90)	11 (71)
08 (205)	1 1/2 (38)	2 1/2 (64)	1 (25)	1 7/8 (48)	17 (110)	14 (90)
•09 (230)	1 1/2 (38)	2 3/8 (60)	1 (25)	1 7/8 (48)	18 (116)	16 (103)
•10 (255)	1 1/2 (38)	2 3/8 (60)	1 (25)	1 7/8 (48)	23 (148)	16 (103)

A SIZE	B	D	E	F	G	MIN-X-MAX	MIN-XX-MAX
02 (50)	05 (125)	3 1/4 (83)	1 1/2 (38)	4 3/4 (120)	5 (125)	1 1/4 (32) 2 1/4 (57)	3/4 (19) 1 5/8 (41)
03 (75)	06 (150)	2 3/4 (70)	2 1/4 (57)	4 3/4 (120)	5 (125)	1 1/4 (32) 2 1/4 (57)	3/4 (19) 1 5/8 (41)
04 (100)	08 (200)	3 1/4 (83)	3 1/4 (83)	6 (150)	4 (100)	1 1/2 (38) 2 1/2 (64)	- -

- Add 3/8" (10) to all min./max. dimensions for round strainer.
- Not available for 05"(125) size strainer.
- \*Collar is reversible to obtain extreme high and low strainer positions.

**NOTE 1:** Sediment Bucket -B not provided for a Hinged Grate (-H)

**NOTE 2:** Sediment Bucket -B not provided for a Ball Float (-BFV) or a Flapper Type (-V)

### REGULARLY FURNISHED:

Duco Cast Iron Body with Flashing Collar and Adjustable Strainer Head with ADA Grate as Indicated by Suffix Letter Selected.

Meets ASME Standard A112.6.3-2001 02(50), 03(75) or 04"(100) sizes only.

SEE PM0457 FOR OPTIONAL STRAINER HEADS

### VARIATIONS:

- Ball Float Backwater Valve -BFV (Fig. 2015 only)
- Flapper Type Backwater Valve -V (NOTE 2)
- Hinged Grate -H (NOTE 1)
- Sediment Bucket -B
- Trap Primer Connection -P050 1/2" (13) & -P075 3/4" (19)
- Vandal Proof Screws -U
- Wide Flanged Strainer (Specify Fig. DX 2010)
- T Threaded Outlet
- Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2010 Only)

### OPTIONAL MATERIALS:

- Bronze Body -BB (Fig. 2010 only)
- Chrome Plated Strainer -CP
- Galvanized Cast Iron Body -G
- Nickel Bronze Strainer -NB
- Polished Bronze Strainer -PB
- All Stainless Steel [Specify Fig. 9700-A (Fig. 2010 only)]
- Stainless Steel Strainers -SS [Available in 05(125) & 06(150) sizes only]

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S2010, 2015  
 SCALE: NONE  
 DATE: 5-17-85  
 APPROVED BY: TD  
 CHECKED BY: TD  
 DRAWN BY: CR  
 FIGURE NUMBER 2010, 2015

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							<b>2010, 2015</b>

P  
DRAWING NUMBER PM0457 SH 1 of 2  
SIZE A  
SCALE NONE  
DATE: 5-17-85  
APPROVED BY: TD  
CHECKED BY: TD  
DRAWN BY: PJ  
FIGURE NUMBER  
2010 SERIES OPTIONAL STRAINER HEADS


**SMITH® JAY R. SMITH MFG. CO.®**  
MEMBER OF MORRIS GROUP INTERNATIONAL  
POST OFFICE BOX 3237  
MONTGOMERY ALABAMA 36109-0237 (USA)  
TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



**NOTE 1:** Sediment Bucket -B not provided for a Hinged Grate (-H)  
**NOTE 2:** Sediment Bucket -B not provided for a Ball Float (-BFV) or a Flapper Type (-V)

# OPTIONAL STRAINER HEADS

## ROUND STRAINER



**MATERIALS:** Chrome Plated -CP  
Polished Bronze -PB  
Nickel Bronze -NB  
Stainless Steel  
Strainers -SS [Available in 05(125) & 06(150) sizes only]

**VARIATIONS:** Hinged Grate (Specify Suffix -AH) (NOTE 1)  
Sediment Bucket -B  
Vandal Proof Screws -U


B DIA	05 (125)	06 (150)	07 (180)	08 (205)	09 (230)	10 (255)
H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	2 1/2 (64)	2 3/4 (70)
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)
X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 1/2 (64)	2 3/4 (70)

LIGHT DUTY

Specify Type, Size & Finish eg: A05NB

**SUFFIX -A**

## FLAPPER TYPE BACKWATER VALVE



**MATERIALS:** Chrome Plated -CP  
Polished Bronze -PB  
Nickel Bronze -NB

**VARIATIONS:** Hinged Grate (Specify Suffix -AH)  
Vandal Proof Screws -U


B DIA	05 (125)	06 (150)	07 (180)	08 (205)
H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)
X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)

LIGHT DUTY

Specify Type, Size & Finish eg: AV05NB  
\*Not available for 05" (125) size

**SUFFIX -AV**

## SQUARE STRAINER



**MATERIALS:** Chrome Plated -CP  
Polished Bronze -PB  
Nickel Bronze -NB

**VARIATIONS:** Flapper Type Backwater Valve (Specify Suffix -BV) 05 (125), 06 (150), 07 (180) or 08" (205) sizes only (NOTE 2)  
Hinged Grate (Specify Suffix -BH) (NOTE 1)  
Sediment Bucket -B  
Vandal Proof Screws -U

B SQ	05 (125)	06 (150)	07 (180)	08 (205)	09 (230)	10 (255)
H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	2 1/4 (57)	2 1/4 (57)
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)
X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 1/4 (57)	2 3/8 (60)

LIGHT DUTY

Specify Type, Size & Finish eg: B05NB

**SUFFIX -B**

## STRAINER HEAD w/SQUARE HINGED COVER



**MATERIALS:** Chrome Plated -CP  
Polished Bronze -PB  
Nickel Bronze -NB


**VARIATIONS:** Gasketed Water Tight Cover -GC  
Secured Cover -SC  
Secondary Strainer Grate -SG

LIGHT DUTY

Specify Type, Size & Finish eg: BSNB

**SUFFIX -BS**

## REINFORCED ROUND STRAINER



**MATERIALS:** Chrome Plated -CP  
Polished Bronze -PB  
Nickel Bronze -NB

**VARIATIONS:** Flapper Type Backwater Valve (Specify Suffix -CV) (NOTE 2)  
Sediment Bucket -B  
Vandal Proof Screws -U

B DIA	05 (125)	06 (150)	08 (205)	10 (255)
H	2 (51)	2 (51)	2 1/2 (64)	2 3/4 (70)
MIN	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 7/8 (48)
MAX	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 3/4 (70)

LIGHT DUTY

Specify Type, Size & Finish eg: C06NB

**SUFFIX -C**

## REINFORCED TRACTOR STRAINER



**MATERIALS:** Cast Iron -CI  
Chrome Plated -CP  
Polished Bronze -PB  
Nickel Bronze -NB

**VARIATIONS:** Flapper Type Backwater Valve (Specify Suffix -DV or -EV) (NOTE 2)  
Sediment Bucket -B  
Vandal Proof Screws -U


SUFFIX	B DIA	H	X	
			MIN	MAX
-D	07 (180)	3 1/4 (83)	2 5/8 (67)	3 1/2 (89)
-E	09 (230)	3 1/2 (89)	2 3/4 (70)	3 1/2 (89)

LIGHT DUTY

Specify Type, Size & Finish eg: D07PB  
E09PB

**SUFFIX -D-E**

## TILE FLANGE



**MATERIALS:** Chrome Plated -CP  
Polished Bronze -PB  
Nickel Bronze -NB

**VARIATIONS:** Flapper Type Backwater Valve (Specify Suffix -FV) (NOTE 2)  
Holes in Flange -SH  
Sediment Bucket -B  
Vandal Proof Screws -U


X	
MIN	MAX
1 1/4 (32)	2 1/8 (54)

LIGHT DUTY

Specify Type, Size & Finish eg: F06NB

**SUFFIX -F**

## ADJUSTABLE STRAINER HEAD



**VARIATIONS:** Flapper Type Backwater Valve (Specify Suffix -F37V or F38V) (NOTE 2)  
Sediment Bucket -B

**MATERIALS:** Cast Iron -CI  
Chrome Plated -CP  
Galvanized Cast Iron -G  
Polished Bronze -PB  
Nickel Bronze -NB

SUFFIX	-F37	-F38
B DIA	07 (180)	09 (230)
H	3 1/4 (83)	3 1/2 (89)
X MIN	2 5/8 (67)	2 3/4 (70)
X MAX	3 1/2 (89)	3 1/2 (89)

NON-TRAFFIC

Specify Type, Size & Finish eg: F37NB F38CP

**SUFFIX -F37-F38**

P	12-24-24	Rev. Notes	HS	KV	FIGURE NUMBER 2005/2010 SERIES OPTIONAL STRAINER HEADS 1 OF 2
N	5-21-24	Removed Function, Rev. Var.	HS	KV	
M	10-8-21	Added NOTE 1 & 2	KK	JM	
REV.	DATE	DESCRIPTION	BY	CKD. BY	

NOTE: Dimensions shown in parentheses are in millimeters.

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

# OPTIONAL STRAINER HEADS










DRAWING NUMBER PM0457 SH 2 of 2	LOW DOME STRAINER	SOLID HINGED COVER	SPANNER WRENCH COVER																																																																								
<p><b>MATERIALS:</b>            Chrome Plated -CP            Polished Bronze -PB            Nickel Bronze -NB</p> <p><b>VARIATIONS:</b>            Flapper Type Backwater Valve (Specify Suffix -GV) (NOTE 2)            Sediment Bucket -B            Vandal Proof Screws -U</p>  <table border="1" style="margin-top: 10px;"> <tr><td>B DIA</td><td>05 (125)</td><td>06 (150)</td><td>08 (205)</td></tr> <tr><td>H</td><td>2 (51)</td><td>2 (51)</td><td>2 1/2 (64)</td></tr> <tr><td>MIN</td><td>1 1/4 (32)</td><td>1 1/4 (32)</td><td>1 1/2 (38)</td></tr> <tr><td>MAX</td><td>2 1/4 (57)</td><td>2 1/4 (57)</td><td>2 1/2 (64)</td></tr> </table> <p><b>SUFFIX -G</b> Specify Type, Size &amp; Finish eg: G08PB</p>	B DIA	05 (125)	06 (150)	08 (205)	H	2 (51)	2 (51)	2 1/2 (64)	MIN	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	MAX	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	<p><b>MATERIALS:</b>            Chrome Plated -CP            Polished Bronze -PB            Nickel Bronze -NB</p> <p><b>VARIATIONS:</b>            Flapper Type Backwater Valve (Specify Suffix -GV) (NOTE 2)            Vandal Proof Screws -U</p>  <table border="1" style="margin-top: 10px;"> <tr><td>B DIA</td><td>05 (125)</td><td>06 (150)</td><td>07 (180)</td><td>08 (205)</td></tr> <tr><td>H</td><td>2 (51)</td><td>2 (51)</td><td>2 1/4 (57)</td><td>2 1/2 (64)</td></tr> <tr><td>X MIN</td><td>1 1/4 (32)</td><td>1 1/4 (32)</td><td>1 1/4 (32)</td><td>1 1/2 (38)</td></tr> <tr><td>X MAX</td><td>2 1/4 (57)</td><td>2 1/4 (57)</td><td>2 1/4 (57)</td><td>2 1/2 (64)</td></tr> </table> <p><b>SUFFIX -H</b> Specify Type, Size &amp; Finish eg: H05CP</p>	B DIA	05 (125)	06 (150)	07 (180)	08 (205)	H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	<p><b>MATERIALS:</b>            Chrome Plated -CP            Polished Bronze -PB            Nickel Bronze -NB</p> <p><b>VARIATIONS:</b>            Flapper Type Backwater Valve (Specify Suffix -GV) (NOTE 2)            Vandal Proof Screws -U</p>  <p style="text-align: center;"><b>MEDIUM DUTY</b></p> <table border="1" style="margin-top: 10px;"> <tr><td>X</td><td>MIN</td><td>MAX</td></tr> <tr><td></td><td>2 (51)</td><td>3 (76)</td></tr> </table> <p><b>SUFFIX -J</b> Specify Type, Size &amp; Finish eg: J06NB</p>	X	MIN	MAX		2 (51)	3 (76)																															
B DIA	05 (125)	06 (150)	08 (205)																																																																								
H	2 (51)	2 (51)	2 1/2 (64)																																																																								
MIN	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)																																																																								
MAX	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)																																																																								
B DIA	05 (125)	06 (150)	07 (180)	08 (205)																																																																							
H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)																																																																							
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)																																																																							
X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)																																																																							
X	MIN	MAX																																																																									
	2 (51)	3 (76)																																																																									
<p><b>MATERIALS:</b>            Chrome Plated -CP            Polished Bronze -PB            Nickel Bronze -NB</p> <p><b>VARIATIONS:</b>            Flapper Type Backwater Valve (Specify Suffix -KV) (NOTE 2)            Sediment Bucket -B            Vandal Proof Screws -U</p>  <table border="1" style="margin-top: 10px;"> <tr><td>B SQ</td><td>05 (125)</td><td>06 (150)</td><td>07 (180)</td><td>08 (205)</td></tr> <tr><td>H</td><td>2 (51)</td><td>2 (51)</td><td>2 1/4 (57)</td><td>2 1/2 (64)</td></tr> <tr><td>X MIN</td><td>1 1/4 (32)</td><td>1 1/4 (32)</td><td>1 1/4 (32)</td><td>1 1/2 (38)</td></tr> <tr><td>X MAX</td><td>2 1/4 (57)</td><td>2 1/4 (57)</td><td>2 1/4 (57)</td><td>2 1/2 (64)</td></tr> </table> <p><b>SUFFIX -K</b> Specify Type, Size &amp; Finish eg: K07CP</p>	B SQ	05 (125)	06 (150)	07 (180)	08 (205)	H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	<p><b>MATERIALS:</b>            Chrome Plated -CP            Polished Bronze -PB            Nickel Bronze -NB</p> <p><b>VARIATIONS:</b>            Sediment Bucket -B            Vandal Proof Screws -U</p>  <p style="text-align: center;"><b>LIGHT DUTY</b></p> <table border="1" style="margin-top: 10px;"> <tr><td>SUFFIX</td><td>L</td><td>M</td><td>N</td><td>P</td><td>R</td><td>T</td></tr> <tr><td>B x B'</td><td>4 1/2(115)x8(205)</td><td>4(100)x12(305)</td><td>5(125)x9(230)</td><td>5(125)x13(330)</td><td>6(150)x10(255)</td><td>5(125)x17(430)</td></tr> <tr><td>H</td><td>2 1/4 (57)</td><td>2 1/2 (64)</td><td>2 1/4 (57)</td><td>3 (76)</td><td>2 1/4 (57)</td><td>3 (76)</td></tr> <tr><td>X MIN</td><td>1 3/8 (35)</td><td>1 7/8 (48)</td><td>1 3/8 (35)</td><td>2 1/8 (54)</td><td>1 3/8 (35)</td><td>2 1/4 (57)</td></tr> <tr><td>X MAX</td><td>2 3/8 (60)</td><td>2 3/4 (70)</td><td>2 3/8 (60)</td><td>3 (76)</td><td>2 3/8 (60)</td><td>3 1/8 (79)</td></tr> </table> <p><b>SUFFIX -L-M-N-P-R-T</b> Specify Type, Size &amp; Finish eg: LNB</p>	SUFFIX	L	M	N	P	R	T	B x B'	4 1/2(115)x8(205)	4(100)x12(305)	5(125)x9(230)	5(125)x13(330)	6(150)x10(255)	5(125)x17(430)	H	2 1/4 (57)	2 1/2 (64)	2 1/4 (57)	3 (76)	2 1/4 (57)	3 (76)	X MIN	1 3/8 (35)	1 7/8 (48)	1 3/8 (35)	2 1/8 (54)	1 3/8 (35)	2 1/4 (57)	X MAX	2 3/8 (60)	2 3/4 (70)	2 3/8 (60)	3 (76)	2 3/8 (60)	3 1/8 (79)	<p><b>MATERIALS:</b>            Chrome Plated -CP            Polished Bronze -PB            Nickel Bronze -NB</p> <p><b>VARIATIONS:</b>            Vandal Proof Screws -U            Sediment Bucket -B</p>  <p style="text-align: center;"><b>LIGHT DUTY</b></p> <table border="1" style="margin-top: 10px;"> <tr><td>SUFFIX</td><td>B</td><td>C</td><td>D</td><td>MIN</td><td>MAX</td></tr> <tr><td>-V</td><td>3 1/2 (89)</td><td>3 1/2 (89)</td><td>4 1/2 (115)</td><td>1 5/8 (41)</td><td>2 5/8 (67)</td></tr> <tr><td>-W</td><td>6 3/4 (170)</td><td>6 3/4 (170)</td><td>6 1/2 (165)</td><td>1 5/8 (41)</td><td>2 5/8 (67)</td></tr> </table> <p><b>SUFFIX -V-W</b> Specify Type, Size &amp; Finish eg: VPB, WNB</p>	SUFFIX	B	C	D	MIN	MAX	-V	3 1/2 (89)	3 1/2 (89)	4 1/2 (115)	1 5/8 (41)	2 5/8 (67)	-W	6 3/4 (170)	6 3/4 (170)	6 1/2 (165)	1 5/8 (41)	2 5/8 (67)
B SQ	05 (125)	06 (150)	07 (180)	08 (205)																																																																							
H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)																																																																							
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)																																																																							
X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)																																																																							
SUFFIX	L	M	N	P	R	T																																																																					
B x B'	4 1/2(115)x8(205)	4(100)x12(305)	5(125)x9(230)	5(125)x13(330)	6(150)x10(255)	5(125)x17(430)																																																																					
H	2 1/4 (57)	2 1/2 (64)	2 1/4 (57)	3 (76)	2 1/4 (57)	3 (76)																																																																					
X MIN	1 3/8 (35)	1 7/8 (48)	1 3/8 (35)	2 1/8 (54)	1 3/8 (35)	2 1/4 (57)																																																																					
X MAX	2 3/8 (60)	2 3/4 (70)	2 3/8 (60)	3 (76)	2 3/8 (60)	3 1/8 (79)																																																																					
SUFFIX	B	C	D	MIN	MAX																																																																						
-V	3 1/2 (89)	3 1/2 (89)	4 1/2 (115)	1 5/8 (41)	2 5/8 (67)																																																																						
-W	6 3/4 (170)	6 3/4 (170)	6 1/2 (165)	1 5/8 (41)	2 5/8 (67)																																																																						
<p><b>MATERIALS:</b>            Duco Cast Iron -CI</p> <p><b>MATERIALS:</b>            Cast Bronze -CB            Galvanized Cast Iron -G</p>  <p><b>REGULARLY FURNISHED:</b>            Duco Cast Iron -CI</p> <p><b>NOTE:</b> Extension can be stacked for increased maximum adjustment.</p> <p><b>SUFFIX -X</b></p>	<p><b>MATERIALS:</b>            Chrome Plated -CP            Nickel Bronze -NB            Polished Bronze -PB</p> <p><b>VARIATIONS:</b>            Less Dome -LD            Standpipe Height other than 6" (150) (Specify Height)</p>  <table border="1" style="margin-top: 10px;"> <tr><td>SUFFIX</td><td>A SIZE</td><td>MIN</td><td>MAX</td></tr> <tr><td>-Y</td><td>2 (51)</td><td>3/4 (19)</td><td>2 1/8 (54)</td></tr> <tr><td>-Z</td><td>3 (76)</td><td>3/4 (19)</td><td>2 1/8 (54)</td></tr> </table> <p><b>SUFFIX -Y-Z</b> Specify Type, Size &amp; Finish eg: YCP, ZCP</p>	SUFFIX	A SIZE	MIN	MAX	-Y	2 (51)	3/4 (19)	2 1/8 (54)	-Z	3 (76)	3/4 (19)	2 1/8 (54)	<p><b>MATERIALS:</b>            Polished Bronze -PB            Rough Bronze -RB            Nickel Bronze -NB</p> <p><b>VARIATIONS:</b>            Flapper Type Backwater Valve (NOTE 2)            Sediment Bucket -B            Vandal Proof Screws -U</p>  <p style="text-align: center;"><b>MEDIUM DUTY</b></p> <p><b>SUFFIX -69</b> eg: AV06-69 eg: A06NB-69</p>																																																													
SUFFIX	A SIZE	MIN	MAX																																																																								
-Y	2 (51)	3/4 (19)	2 1/8 (54)																																																																								
-Z	3 (76)	3/4 (19)	2 1/8 (54)																																																																								

FIGURE NUMBER	N M L K	12-24-24 5-21-24 7-29-19 10-20-17	Added Notes Removed Function, Rev. Var. Added Load Rating(s) Rev. Materials Suffix -H, -V-W	HS HS MW TBW	KV KV JM CL	FIGURE NUMBER 2005/2010 SERIES OPTIONAL STRAINER HEADS 2 of 2
REV.	DATE	DESCRIPTION		BY	CKD. BY	

NOTE: Dimensions shown in parentheses are in millimeters.



**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov