



MODEL NO. 3005



ARCHITECTURAL SERIES

PRODUCT BROCHURE



8120 THRU 8180



7108 THRU 7188



FIRE PROTECTION EQUIPMENT

Since 1937

FIRE SPREADS FAST.

STOP IT FASTER WITH

POTTER ROEMER.

PROVEN EXPERTISE SINCE 1937

NATIONWIDE SUPPORT

COMPREHENSIVE SOLUTIONS

RELIABLE QUALITY

EFFICIENCY AND CONVENIENCE

ARCHITECTURAL SECTION 10



PAGE **4**

FIRE EXTINGUISHER
CABINETS

PAGE **7**

FIRE EXTINGUISHERS
AND SECTIONS

PAGE **9**

FIRE CABINET
ACCESSORIES

PAGE **10**

FIRE VALVE AND
COMBINATION CABINETS

PAGE **12**

HOW TO SPECIFY

PAGE **14**

CUSTOM PRODUCTS

PAGE **16**

ACCESS DOORS

PAGE **18**

AED CABINETS

FIRE EXTINGUISHER CABINETS

FIRE EXTINGUISHER CABINETS are offered in a variety of materials styles to suit any building need, including ADA compliance and fire ratings to maintain wall fire resistance.




SURFACE

Behind the wall



SEMI-RECESSED



RECESSED

In front of the wall

VERSATILE:

Designed to meet all building and design standards, backed by decades of experience.

CUSTOMIZABLE:

Choose from various materials and finishes for doors and frames.

DIVERSE STYLES:

Multiple door styles to fit any project need.

INNOVATIVE DESIGN:

Focused on the continuous improvement and superior solutions.

DURABLE BUILD:

Heavy-duty, cold-rolled steel construction.

SAFETY ASSURED:


Tempered glass with patented Break Rite® feature.

QUALITY FINISH:

Powder-coated, finished, and inspected in-house.




ALTA SERIES



The **ALTA SERIES** door and frame option features durable, unitized construction for an economical solution that complements virtually any type of building.

MODEL NUMBER				WALL MOUNTING	BOX I.D.			FRAME O.D		WALL OPENING			FRC OPTION			ADA	FOR USE WITH THESE EXTINGUISHERS
STEEL	ALUMINUM	STAINLESS STEEL	BRASS		K	L	M	N	O	W	H	D	W	H	D		
7007	7037	7057	7077	Recessed-1/2	9	18	5	11 3/4	20 3/4	10	19	4 3/4	11 1/4	20	5 5/8	Yes	3002 3005 3005-3 3302 3305 3305-3
7008	7038	7058	7078	Semi-Recessed-2	9	18	5	11 3/4	20 3/4	10	19	3 3/4	11 1/4	20	4 1/8	Yes	
7009	7039	7059	7079	Surface	11 1/2	20 1/2	5 3/4	-	-	-	-	-	-	-	-	No	
7010	7030	7050	7070	Recessed-1/2	9	24	5	11 3/4	26 3/4	10	25	4 3/4	11 1/4	26	5 5/8	Yes	
7012	7032	7052	7072	Semi-Recessed-2	9	24	5	11 3/4	26 3/4	10	25	3 3/4	11 1/4	26	4 1/8	Yes	
7013	7033	7053	7073	Semi-Recessed-3	9	24	5	11 3/4	26 3/4	10	25	2 1/4	11 1/4	26	3 1/8	Yes	3006 3010 3112 3306 3310 3405
7020	7040	7060	7080	Recessed-1/2	9	24	5 3/4	11 3/4	26 3/4	10	25	5 1/2	11 1/4	26	6 3/8	Yes	
7021	7041	7061	7081	Trimless	9	24	5 3/4	12 3/4	27 3/4	10	25	6	11 1/4	26	7 3/8	Yes	
7022	7042	7062	7082	Semi-Recessed-2	9	24	5 3/4	11 3/4	26 3/4	10	25	4	11 1/4	26	4 7/8	Yes	
7023	7043	7063	7083	Semi-Recessed-3	9	24	5 3/4	11 3/4	26 3/4	10	25	3	11 1/4	26	3 7/8	Yes	
7024	7044	7064	7084	Surface	11 1/2	26 1/2	5 3/4	-	-	-	-	-	-	-	-	No	3020 3202 3320 3410
7025	7045	7065	7085	Recessed-1/2	12	27	8	14 3/4	29 3/4	13	28	7 3/4	14 1/4	29	8 5/8	Yes	
7026	7046	7066	7086	Trimless	12	27	8	15 3/4	30 3/4	13	28	8 1/4	14 1/4	29	9 5/8	Yes	
7027	7047	7067	7087	Semi-Recessed-3	12	27	8	14 3/4	29 3/4	13	28	5 1/4	14 1/4	29	6 1/8	Yes	
7028	7048	7068	7088	Semi-Recessed-5	12	27	8	14 3/4	29 3/4	13	28	3 1/4	14 1/4	29	4 1/8	No	
7029	7049	7069	7089	Surface	14 5/8	29 3/8	8	-	-	-	-	-	-	-	-	No	

BUENA SERIES




The **BUENA SERIES** features a full acrylic door with a 2-point hinge for an ultra-clean, contemporary look.

MODEL NUMBER				WALL MOUNTING	BOX I.D.			FRAME O.D		WALL OPENING			FRC OPTION			ADA	FOR USE WITH THESE EXTINGUISHERS
STEEL	ALUMINUM	STAINLESS STEEL	BRASS		K	L	M	N	O	W	H	D	W	H	D		
7107	7137	7157	7177	Recessed-1/2	9	18	5	11 3/4	20 3/4	10	19	4 3/4	11 1/4	20	5 5/8	Yes	3002 3005 3005-3 3302 3305 3305-3
7108	7138	7158	7178	Semi-Recessed-2	9	18	5	11 3/4	20 3/4	10	19	3 3/4	11 1/4	20	4 1/8	Yes	
7109	7139	7159	7179	Surface	11 1/2	20 1/2	5 3/4	-	-	-	-	-	-	-	-	No	
7110	7130	7150	7170	Recessed-1/2	9	24	5	11 3/4	26 3/4	10	25	4 3/4	11 1/4	26	5 5/8	Yes	
7112	7132	7152	7172	Semi-Recessed-2	9	24	5	11 3/4	26 3/4	10	25	3 3/4	11 1/4	26	4 1/8	Yes	
7113	7133	7153	7173	Semi-Recessed-3	9	24	5	11 3/4	26 3/4	10	25	2 1/4	11 1/4	26	3 1/8	Yes	3006 3010 3112 3306 3310 3405
7120	7140	7160	7180	Recessed-1/2	9	24	5 3/4	11 3/4	26 3/4	10	25	5 1/2	11 1/4	26	6 3/8	Yes	
7121	7141	7161	7181	Trimless	9	24	5 3/4	12 3/4	27 3/4	10	25	6 1/2	11 1/4	26	7 3/8	Yes	
7122	7142	7162	7182	Semi-Recessed-2	9	24	5 3/4	11 3/4	26 3/4	10	25	4	11 1/4	26	4 7/8	Yes	
7123	7143	7163	7183	Semi-Recessed-3	9	24	5 3/4	11 3/4	26 3/4	10	25	3	11 1/4	26	3 7/8	Yes	
7124	7144	7164	7184	Surface	11 1/2	26 1/2	5 3/4	-	-	-	-	-	-	-	-	No	3020 3202 3320 3410
7125	7145	7165	7185	Recessed-1/2	12	27	8	14 3/4	29 3/4	13	28	7 3/4	14 1/4	29	8 5/8	Yes	
7126	7146	7166	7186	Trimless	12	27	8	15 3/4	30 3/4	13	28	8 3/4	14 1/4	29	9 5/8	Yes	
7127	7147	7167	7187	Semi-Recessed-3	12	27	8	14 3/4	29 3/4	13	28	5 1/4	14 1/4	29	6 1/8	Yes	
7128	7148	7168	7188	Semi-Recessed-5	12	27	8	14 3/4	29 3/4	13	28	3 1/4	14 1/4	29	4 1/8	Yes	
7129	7149	7169	7189	Surface	14 5/8	29 3/8	8	-	-	-	-	-	-	-	-	No	

Please refer to PotterRoemer.com for detailed submittals and all available options.


LOMA SERIES



The shallow design and clear plastic “bubble” window of the **LOMA** cabinet are ideal for structures with limited wall depth.

MODEL NUMBER				WALL MOUNTING	BOX I.D.			FRAME O.D		WALL OPENING			FRC OPTION			ADA	FOR USE WITH THESE EXTINGUISHERS
STEEL	ALUMINUM	STAINLESS STEEL	BRASS		K	L	M	N	O	W	H	D	W	H	D		
7307	7337	7357	7377	Recessed-1/2	9	18	4	11 3/4	20 3/4	10	19	3 3/4	11 1/4	20	4 5/8	Yes	3002, 3005, 3005-3, 3302, 3305, 3305-3
7308	7338	7358	7378	Semi-Recessed-2	9	18	4	11 3/4	20 3/4	10	19	2 1/4	11 1/4	20	3 1/8	No	
7309	7339	7359	7379	Surface	11 1/2	20 1/2	4	-	-	-	-	-	-	-	-	No	
7320	7340	7360	7380	Recessed-1/2	9	24	4	11 3/4	26 3/4	10	25	3 3/4	11 1/4	26	4 5/8	Yes	3006, 3010, 3112, 3306, 3310, 3405
7321	7341	7361	7381	Trimless	9	24	4 1/2	12 3/4	27 3/4	10	25	4 1/4	11 1/4	26	5 5/8	Yes	
7322	7342	7362	7382	Semi-Recessed-2	9	24	4	11 3/4	26 3/4	10	25	2 1/4	11 1/4	26	3 1/8	No	
7324	7344	7364	7384	Surface	11 1/2	26 1/2	5	-	-	-	-	-	-	-	-	No	3020 3202 3320
7325	7345	7365	7385	Recessed-1/2	12	27	5 3/4	14 1/2	29 1/2	13	28	5 1/2	14 1/4	29	5 3/8	Yes	
7326	7346	7366	7386	Trimless	12	27	6 1/4	15 1/2	30 1/2	13	28	6 1/2	14 1/4	29	6 3/8	Yes	
7327	7347	7367	7387	Semi-Recessed-3	12	27	5 3/4	14 1/2	29 1/2	13	28	4	14 1/4	29	2 7/8	No	
7329	7349	7369	7389	Surface	14 1/2	29 1/2	5 3/4	-	-	-	-	-	-	-	-	Yes	
7324	7344	7364	7384	Surface	11 1/2	26 1/2	4	-	-	-	-	-	-	-	-	No	3405
7325	7345	7365	7385	Recessed-1/2	12	27	4 3/4	14 1/2	29 1/2	13	28	4 1/2	14 1/4	29	5 3/8	Yes	
7326	7346	7366	7386	Trimless	12	27	5 1/4	15 1/2	30 1/2	13	28	5 1/2	14 1/4	29	6 3/8	Yes	
7327	7347	7367	7387	Semi-Recessed-3	12	27	4 3/4	14 1/2	29 1/2	13	28	3	14 1/4	29	2 7/8	No	
7329	7349	7369	7389	Surface	14 1/2	29 1/2	4 3/4	-	-	-	-	-	-	-	-	Yes	

DANA SERIES



The trimless look of the **DANA SERIES** can be designed to effortlessly blend into its surrounding environment or styled to stand out.

MODEL NUMBER				WALL MOUNTING	BOX I.D.			FRAME O.D		WALL OPENING			FRC OPTION			ADA	FOR USE WITH THESE EXTINGUISHERS
STEEL	ALUMINUM	STAINLESS STEEL	BRASS		K	L	M	N	O	W	H	D	W	H	D		
7210	7230	7250	7270	5/8 Protrusion	9	18	5 3/4	11 3/4	20 3/4	10	19	6	10 13/16	19 3/4	6 5/8	Yes	3002 - 3005-2
7220	7240	7260	7280	5/8 Protrusion	9	24	5 3/4	11 3/4	26 3/4	10	25	6	10 13/16	25 3/4	6 5/8	Yes	3002 - 3310
7225	7245	7265	7285	5/8 Protrusion	12	27	8	14 3/4	29 3/4	13	28	8 1/4	13 15/16	28 15/16	6 5/8	Yes	3202, 3020 - 3410

Please refer to PotterRoemer.com for detailed submittals and all available options.



ABC DRY CHEMICAL



HALOTRON



WATER



BC DRY CHEMICAL



CARBON DIOXIDE

ABC MULTI-PURPOSE DRY CHEMICAL: Used to provide protection against class A, B, and C fires; Red, glossy, polyester-coated steel cylinder with pressure gauge, wall mounting bracket, and hose or nozzle as indicated. Contents stored under pressure at approximately 195 P.S.I.

MODEL NUMBER	NOMINAL CAPACITY	RATING	APPROVAL	HEIGHT	CYLINDER DIAMETER	RANGE OF STREAM	TYPE DISCHARGE
3002	2 1/2 lbs.	1A:10B:C	YES	14 3/4"	3"	9'-15'	Nozzle
3005	5 lbs.	2A:10B:C	YES	15 1/4"	4 1/4"	12'-18'	Hose
3005-3	5 lbs.	3A:40B:C	NO	15 1/4"	4 1/4"	12'-18'	Hose
3006	6 lbs.	3A:40B:C	YES	16"	5"	15'-21'	Hose
3010	10 lbs.	4A:80B:C	YES	20"	5"	15'-21'	Hose
3020	20 lbs.	10A:120B:C	YES	23 1/4"	7"	15'-21'	Hose

OPTIONAL MOUNTING BRACKETS	
Model Number	Fits Size
3901	5 lb.
3902	6 lb.
3903	10 lb.
3904	20 lb.
3909	5, 6, 10 lb.
3910	20 lb.

HALOTRON 1: EPA approved "Clean Agent" for class A, B, and C fires; Red, glossy, polyester-coated steel cylinder with discharge nozzle and bracket. Contents pressurized at approximately 125 P.S.I.

MODEL NUMBER	NOMINAL CAPACITY	RATING	APPROVAL	HEIGHT	CYLINDER DIAMETER	RANGE OF STREAM	TYPE DISCHARGE
3101	1.4 lbs.	1B:C	NO	10"	2 1/8"	6'-8'	Nozzle
3102	2.5 lbs.	2B:C	NO	14 3/4"	3"	6'-10'	Nozzle
3105	5 lbs.	5B:C	NO	15 1/4"	4 1/4"	9'-15'	Nozzle
3111	11 lbs.	1A:10B:C	NO	21 1/2"	6"	9'-15'	Hose & Nozzle
3112	12.5 lbs.	2A:10B:C	NO	21 1/2"	6"	12'-18'	Hose & Nozzle
3115	15.5 lbs.	2A:10B:C	NO	21 7/8"	6"	12'-18'	Hose & Nozzle

PRESSURIZED WATER *: Used to provide protection against class A fires; Stainless steel shell with pressure gauge and wall mounting bracket. Shipped empty, to be charged at destination by authorized personnel. *OPTION: -AF Anti-freeze charge

MODEL NUMBER	NOMINAL CAPACITY	RATING	APPROVAL	HEIGHT	CYLINDER DIAMETER	RANGE OF STREAM	TYPE DISCHARGE
3202 (Water)	2 1/2 gals.	2A	YES	24 1/2"	7"	45'-55'	Hose

OPTIONAL MOUNTING BRACKETS	
Model Number	Fits Size
3904	2 1/2 gals.

KITCHEN CLASS K: Used to provide protection against class K fires; Stainless steel with easy to use hose and spray application nozzle.

MODEL NUMBER	NOMINAL CAPACITY	RATING	APPROVAL	HEIGHT	CYLINDER DIAMETER	RANGE OF STREAM	TYPE DISCHARGE
3260 (Wet Chem)	6 ltr.	2A:K	NO	19"	7"	10'-12'	Hose
3262 (Wet Chem)	2 1/2 gals.	2A:K	NO	24 1/2"	7"	10'-12'	Hose

OPTIONAL MOUNTING BRACKETS	
Model Number	Fits Size
3904	2 1/2 gals.

BC DRY CHEMICAL: Used to provide protection against class B and C fires; Same as multi-purpose shown above.

MODEL NUMBER	NOMINAL CAPACITY	RATING	APPROVAL	HEIGHT	CYLINDER DIAMETER	RANGE OF STREAM	TYPE DISCHARGE
3302	2 1/2 lbs.	10B:C	YES	14 3/4"	3"	9'-15'	Nozzle
3305	5 lbs.	10B:C	YES	15 1/4"	4 1/4"	12'-18'	Nozzle
3305-3	5 1/2 lbs.	40B:C	NO	15 1/4"	4 1/4"	12'-18'	Hose
3306	6 lbs.	40B:C	YES	16 3/4"	5"	15'-21'	Hose
3310	10 lbs.	60B:C	YES	20"	5"	15'-21'	Hose
3320	20 lbs.	120B:C	YES	23 1/4"	7"	15'-21'	Hose

OPTIONAL MOUNTING BRACKETS	
Model Number	Fits Size
3901	5 lb.
3902	6 lb.
3903	10 lb.
3904	20 lb.
3909	5, 6, 10 lb.
3910	20 lb.

CARBON DIOXIDE: Used to provide protection against class B and C fires; Red, glossy, polyester-coated aluminum cylinder, with discharge horn and wall bracket. Contents pressurized at approximately 735 P.S.I.

MODEL NUMBER	NOMINAL CAPACITY	RATING	APPROVAL	HEIGHT	CYLINDER DIAMETER	OVERALL WIDTH	RANGE OF STREAM	TYPE DISCHARGE
3405	5 lbs.	5B:C	YES	17 3/4"	5 1/4"	8 1/2"	3'-8'	Horn
3410	10 lbs.	10B:C	YES	24"	7"	12"	3'-8'	Hose & Horn
3415	15 lbs.	10B:C	YES	30"	7"	12"	3'-8'	Hose & Horn
3420	20 lbs.	10B:C	YES	30"	8"	13"	3'-8'	Hose & Horn

OPTIONAL MOUNTING BRACKETS	
Model Number	Fits Size
3903	5 lb.
3904	10,15 lb.
3905	20 lb.
3909	5 lb.

BrX Series THE CLEAR CHOICE

PREMIUM, SUSTAINABLE CLEAN AGENT

for SENSITIVE COMMERCIAL ENVIRONMENTS

ONCE EXCLUSIVE TO THE AEROSPACE INDUSTRY, THE HIGH PERFORMING HT-SERIES

for commercial settings can safely put out fires without damaging electronic equipment, specialized machinery, or other delicate materials. That also means that there is no clean-up or down time for your operations. Industries such as health care, clean manufacturing, data processing centers, and museums would all benefit from the HT Series. This fire extinguisher is also sensitive to the environment, meeting strict environmental regulations for Global Warming Potential and Ozone Depletion Potential. With knock down power and firefighting efficiency, the HT-Series using Halotron BrX agent features a steel cylinder, durable high-gloss polyester powder paint, and all-metal valve construction. Maximum visibility during discharge, a large stainless steel pull pin, and no electronic conductivity back to the user make this extinguisher extremely easy to use.



KEY FEATURES AND BENEFITS:

- > Stored-pressure design for simple inspection
- > A low-GWP and very low-ODP product
- > No thermal or static shock
- > 12 year service life; non-rechargeable
- > Six-year manufacturer warranty
- > All-metal valve construction
- > Durable, high-gloss polyester powder-coat finish
- > Steel cylinder design
- > Flexible hose, all-metal hose for easy use
- > Leaves no residue
- > 7-day atmospheric lifespan
- > ABC Rating

AGENT TYPE HALOTRON® BrX (2-BTP)

VALVE TYPE	Anodized Aluminum
DESIGN	Hose & Nozzle
UL & ULC RATING	2A:10B:C
CAPACITY (LBS.) / (KG)	12.5 / 5.67
FILLED WT. (LBS.) / (KG)	19.88 / 9.02
HEIGHT (IN.) / (MM)	20.25 / 514.3
WIDTH (IN.) / (MM)	8.5 / 215.9
DEPTH (IN.) / (MM)	5 / 127
DISCHARGE TIME (SEC.)	16
RANGE (INITIAL- FT. / M)	15-17 / 4.57-5.18
MINIMUM CONFINED SPACE REQUIREMENTS (FT3/ M3)	2,988 / 84.6
NOMINAL OPERATING PRESSURE	150 PSIG
INCLUDED BRACKET	Wall

CABINET ACCESSORIES



MODEL 7000-CA

This battery-operated cabinet alarm sounds when the fire extinguisher cabinet is opened.



MODEL 7911

This cam catch ensures a secure closure for a fire cabinet.



MODEL 7912

This lock ensures the security of your architectural cabinet and equipment.




MODEL BR04

This Break Rite® handle attaches to your Architectural cabinet and provides an easy and safe way to break the glass when the extinguisher is needed in an emergency.



MODEL BR02

This Break Rite handle attaches to a Duo Vertical (DV) door style cabinet and provides an easy and safe way to break the glass when the extinguisher is needed in an emergency.

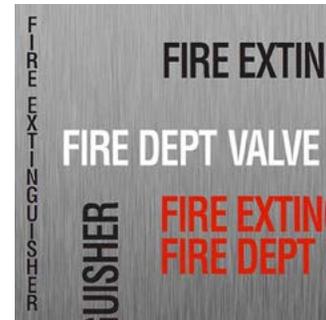

MODEL 7900 THRU 7983

Label your fire extinguisher and/or fire department valve with these die-cut letters in your choice of color.

Please refer to PotterRoemer.com for detailed submittals and all available options.

FIRE VALVE CABINETS & COMBINATION CABINETS

FIRE VALVE CABINETS provide a secure and easy-to-find location for storing fire department connection valves. Made from durable steel or fiberglass, they protect against damage and tampering.

AVAILABLE IN recessed, semi-recessed, surface-mounted, and weather-resistant styles, some have fire ratings for wall integrity.



SURFACE



SEMI-RECESSED






RECESSED




TRIMLESS

Behind the wall



In front of the wall



COMBINATION CABINETS house both fire extinguishers and fire department valves in a single unit, simplifying installation and offering quick access in an emergency.

ALTA SERIES

MODEL NUMBER			WALL MOUNTING	BOX I.D.			FRAME O.D.		WALL OPENING			INLET LOC.		SHELF	FRC OPTION			ADA	FOR USE WITH
STEEL	ALUMINUM	STAINLESS STEEL		K	L	M	N	O	W	H	D	Y	Z		Z-Z	W	H		
8020	8040	8060	Recessed-5/8	18	18	8	21 3/4	21 3/4	19	19	8 1/2	9	4	-	20 1/4	20	9 3/4	Yes	2 1/2" Angle Valve
8021	8041	8061	Trimless	18	18	8 3/4	21	21	19	19	9 1/4	9	4	-	20 1/4	20	10 1/2	Yes	
8022	8042	8062	Semi-Recessed-2	18	18	8	21 1/2	21 1/2	19	19	6 1/2	9	4	-	20 1/4	20	7 3/4	Yes	
8024	8044	8064	Surface	20	20	9 1/4	-	-	-	-	-	-	-	-	-	-	-	No	Up to 20 lb Dry Chem. Fire Ext. and 2 1/2" Angle Valve
8025	8045	8065	Recessed-5/8	14	40	8	17 3/4	43 3/4	15	41	8 1/2	4	4	12	16 1/4	42	9 3/4	Yes	
8026	8046	8066	Trimless	14	40	8 3/4	17	43	15	41	9 1/4	4	4	12	16 1/4	42	10 1/2	Yes	
8027	8047	8067	Semi-Recessed-2	14	40	8	17 1/2	43 1/2	15	41	6 1/2	4	4	12	16 1/4	42	7 3/4	Yes	
8029	8049	8069	Surface	16	42	9 1/4	-	-	-	-	-	-	-	12	-	-	-	No	

BUENA SERIES

MODEL NUMBER			WALL MOUNTING	BOX I.D.			FRAME O.D.		WALL OPENING			INLET LOC.		SHELF	FRC OPTION			ADA	FOR USE WITH
STEEL	ALUMINUM	STAINLESS STEEL		K	L	M	N	O	W	H	D	Y	Z		Z-Z	W	H		
8120	8140	8160	Recessed-5/8	18	18	8	21 3/4	21 3/4	19	19	8 1/2	4	-	-	20 1/4	20	9 3/4	Yes	2 1/2" Angle Valve
8121	8141	8161	Trimless	18	18	8 3/4	21	21	19	19	9 1/4	9	4	-	20 1/4	20	10 1/2	Yes	
8122	8142	8162	Semi-Recessed-2	18	18	8	21 1/2	21 1/2	19	19	6 1/2	9	4	-	20 1/4	20	7 3/4	Yes	
8124	8144	8164	Surface	20	20	9 1/4	-	-	-	-	-	-	-	-	-	-	-	No	Up to 20 lb Dry Chem. Fire Ext. and 2 1/2" Angle Valve
8125	8145	8165	Recessed-5/8	14	40	8	17 3/4	43 3/4	15	41	8 1/2	4	4	12	16 1/4	42	9 3/4	Yes	
8126	8146	8166	Trimless	14	40	8 3/4	17	43	15	41	9 1/4	4	4	12	16 1/4	42	10 1/2	Yes	
8127	8147	8167	Semi-Recessed-2	14	40	8	17 1/2	43 1/2	15	41	6 1/2	4	4	12	16 1/4	42	7 3/4	Yes	
8129	8149	8169	Surface	16	42	9 1/4	-	-	-	-	-	-	-	-	-	-	-	No	

DANA SERIES

MODEL NUMBER			WALL MOUNTING	BOX I.D.			FRAME O.D.		WALL OPENING			INLET LOC.		SHELF	FRC OPTION			ADA	FOR USE WITH
STEEL	ALUMINUM	STAINLESS STEEL		K	L	M	N	O	W	H	D	Y	Z		Z-Z	W	H		
8220	8240	8260	5/8 Protrusion	18	18	8	20 1/2	20 1/2	19	19	8 1/2	9	4	-	19 3/8	19 3/4	9 7/8	Yes	2 1/2" Angle Valve
8225	8245	8265	5/8 Protrusion	14	40	8	16 1/2	42 1/2	15	41	8 1/2	4	4	12	15 5/8	41 3/4	9 5/8	Yes	Up to 20 lb Dry Chem. Fire Ext. and 2 1/2" Angle Valve

FOR ACCESSORIES, PLEASE SEE PAGE 9.

Please refer to PotterRoemer.com for detailed submittals and all available options.

HOW TO SPECIFY

CHOOSE COMPLIANCY

(Fire-rated and/or ADA compliant)

CHOOSE SIZE

(determined by fire extinguisher size)

CHOOSE TRIM STYLE

CHOOSE SERIES

CHOOSE OPTIONS



SPECIFICATION EXAMPLE:

FRC - 7022 - A - 1 - VR

FRC- Fire Rated (optional, not shown)

7022 Cabinet series, size, trim & material

-A Door style

-1 Glazing material (optional, not shown)

-VR Lettering style (optional)

7022

CABINET SERIES,
SIZE, TRIM & MATERIAL

-A

DOOR STYLE

-VR

LETTERING STYLE

ALTA CABINETS



-A full glass



-B full break glass



-D duo panel



-DV duo vertical panel



-DVL duo vertical panel w/lock



-E center break glass



-F solid flush panel



-FS solid flush panel w/lock



-A-FP full glass w/flush pull handle



-DV-FP duo vertical panel w/flush pull handle



-F-FP solid flush panel w/flush pull handle

BUENA CABINETS



-A full acrylic panel



-E full acrylic panel with scored insert and cylinder lock



-DV duo vertical panel



-DVL duo vertical panel w/lock



-F solid flush panel



-FS solid flush panel w/lock

DANA CABINETS

LOMA CABINETS (EXTINGUISHER CABINETS ONLY)



-BA full bubble w/catch



-BB full bubble w/cylinder lock

LETTERING

A host of letter colors and placement options are also available.

LOOKING FOR SOMETHING UNIQUE? LET US HELP.

SIMPLIFY DESIGN:

Standards, codes, and function meet design without compromise.

TAILORED SOLUTIONS:

A portfolio of safety, quality, and design features for custom project needs.

EXPERT COLLABORATION:

Our deep knowledge of owner, architect, and installer roles ensures seamless support.

DIRECT SERVICE:


Personalized customer care at every phase.





ACCESS DOORS ARE VITAL FOR CONCEALED BUILDING SYSTEMS.

Available in wall, ceiling, and duct mount styles, they provide access to plumbing, electrical components, and HVAC ductwork.

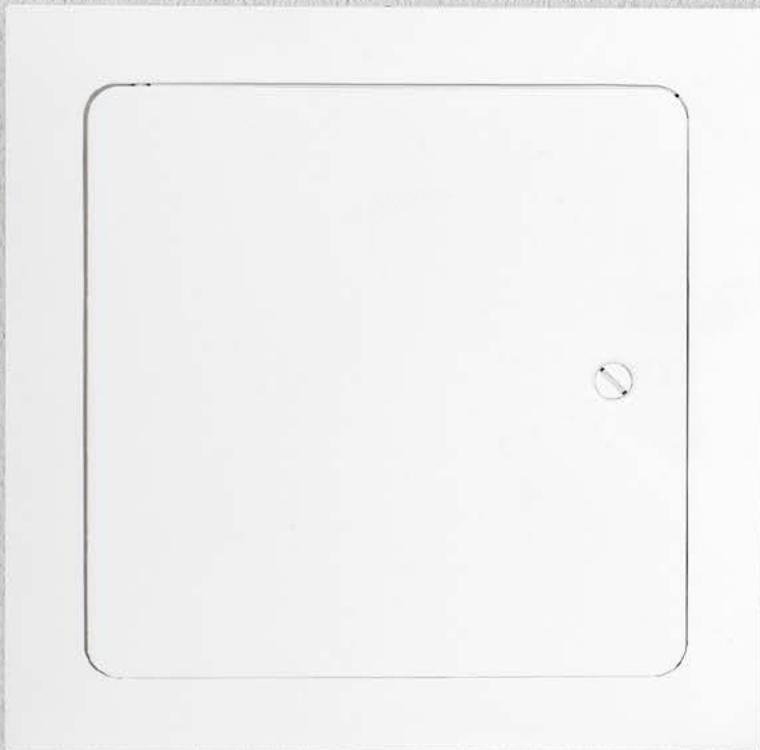

NON-FIRE-RATED DOORS are for areas without fire separation needs, offering easier installation and cost savings.



FIRE-RATED ACCESS DOORS help maintain fire barrier integrity, aiding in fire spread prevention and compliance with building codes.

Choosing the right mount and fire rating ensures safety and efficient access for building maintenance.

Please refer to PotterRoemer.com for detailed submittals and all available options.

DETENTION VALVE CABINET



DETENTION FIRE CABINETS are designed with the utmost security in mind. Crafted from steel and specifically engineered to resist tampering, these cabinets ensure that fire protection equipment is both safe and secure. They're a reliable choice for any high-security environment, featuring specialized locks, smooth finishes, and versatile wall-mount options.

Please refer to PotterRoemer.com for detailed submittals and all available options.

AED CABINETS

AED CABINETS ARE DESIGNED TO

KEEP AUTOMATED EXTERNAL DEFIBRILLATORS

VISIBLE, SECURE, AND QUICKLY ACCESSIBLE


in emergencies.



MODEL 9020

- > All components are powdercoated with an electrostatically-applied, thermally fused, recoatable white polyester finish.
- > Clear acrylic glazing door panels provided.
- > Flush pull handle unlatches the door to open.
- > A 120 dB alarm with on/off keyed switch to discourage meddling is provided. Alarm indicates there is an emergency and someone is removing the AED.

Available in both indoor and outdoor models, these cabinets often feature alarms, clear windows, and durable construction to deter theft and ensure readiness. Proper placement and easy identification help save lives by reducing response time during cardiac emergencies.

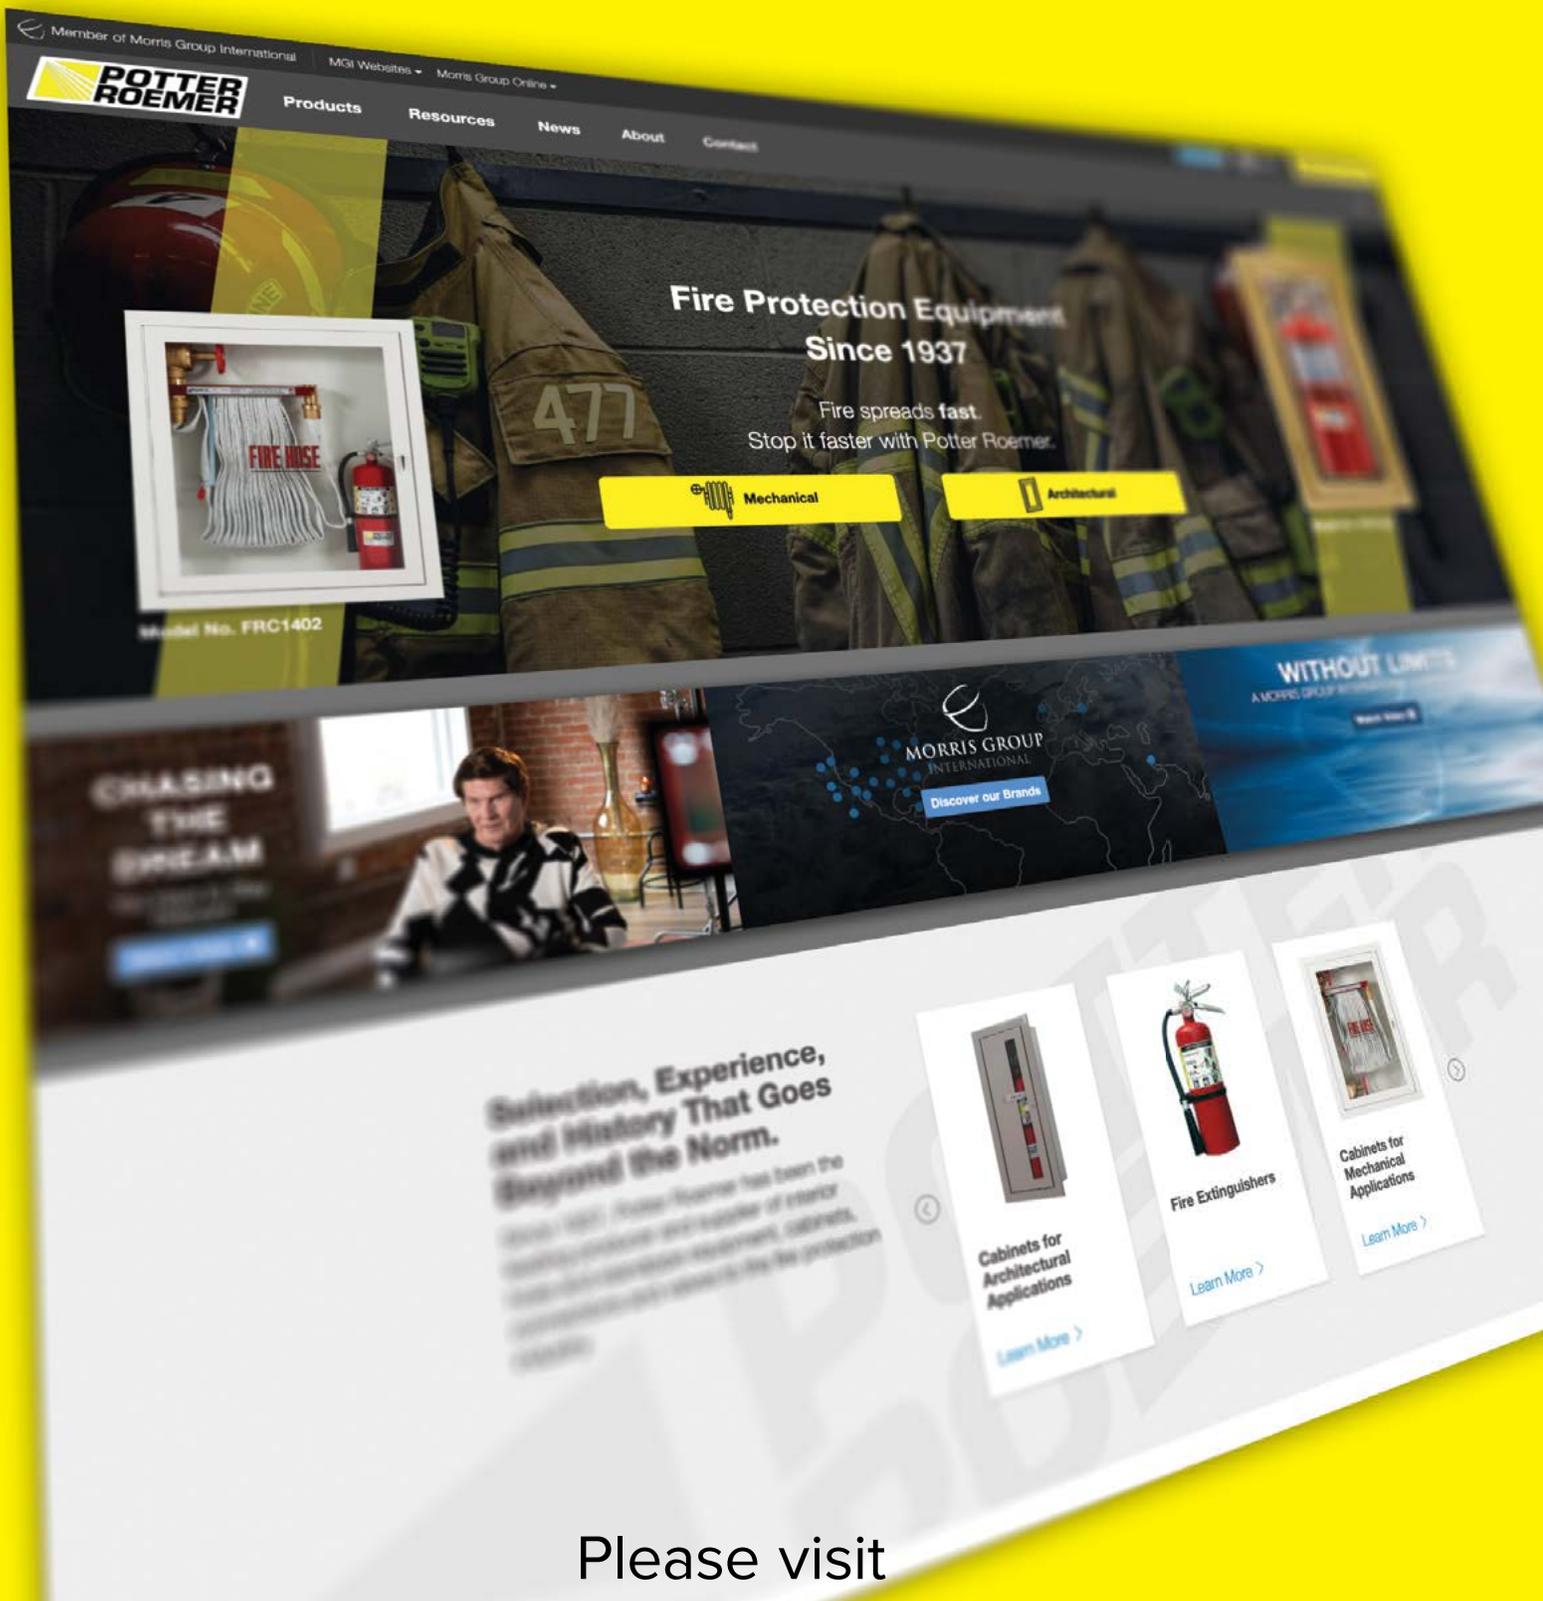


Please visit

POTTERROEMER.COM

for detailed submittals and all available options.

DISTRIBUTION LOCATIONS

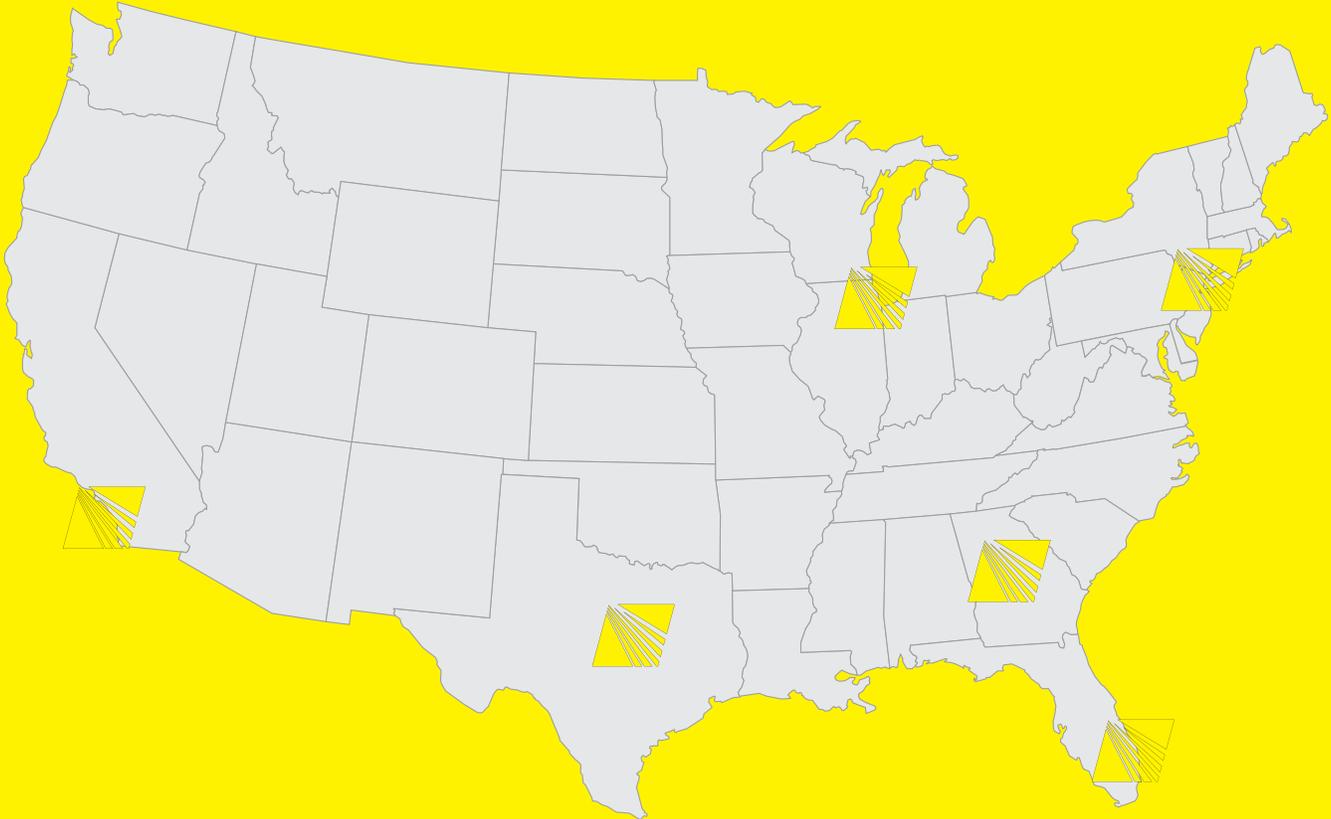

LOS ANGELES (HEADQUARTERS)

17451 Hurley Street
City of Industry, CA 91744
626-855-4890

CHICAGO

1350 N. Michael Drive
Wood Dale, IL 60191
630-766-4545

NEW YORK CITY

1480 Ridgeway Street
Union, NJ 07083
908-946-5775

DALLAS

1500 Precision Drive, Suite 120
Plano, TX 75074
972-516-1800

ATLANTA

4110 Tench Road, Suite J
Suwanee, GA 30024
770-904-3350

MIAMI

8306 NW 14th Street
Miami, FL 33126
786-845-0842

OUR NETWORK OF DISTRIBUTION CENTERS in major cities nationwide ensures that our fire extinguisher cabinets are always within reach. Wherever your project is located, we're ready to deliver quickly and efficiently to keep your fire safety needs covered.