



Division of Acorn  
 Engineering Company



A MEMBER OF



MORRIS GROUP  
 INTERNATIONAL

**WHCSH-15/WHCSH16/WHCSH25  
 LIGATURE RESISTANT CONICAL SHOWER HEAD**

Bestcare® Conical Showerhead provides ligature-resistance with fixed, multi-stream spray pattern. Showerhead is available in 1.5 GPM (5.68 L), 1.6 gpm (6.06 L) and 2.5 GPM (9.46 L) flow rate and includes Chrome Plated Brass Body, Type 304 Stainless Steel Escutcheon with White Powder Coated Finish, O-ring Adapter, Mounting Plate and Stainless Steel Mounting Fasteners. Spray pattern is non-adjustable.

Wall Anchors and Mounting Hardware is Installer provided as needed to suit site conditions.

Complies to ASME A112.18.1/CSA 125.1 requirements (Certification of file).

Refer to [LINK](#) for Spray Pattern Details.







WHCSH

**MODEL NUMBER AND OPTIONS SELECTION:**

**BASE MODEL NUMBER (Must Specify)**

- WHCSH15 Ligature Resistant Showerhead, 1.5 GPM
- WHCSH16 Ligature Resistant Showerhead, 1.6 GPM
- WHCSH25 Ligature Resistant Showerhead, 2.5 GPM

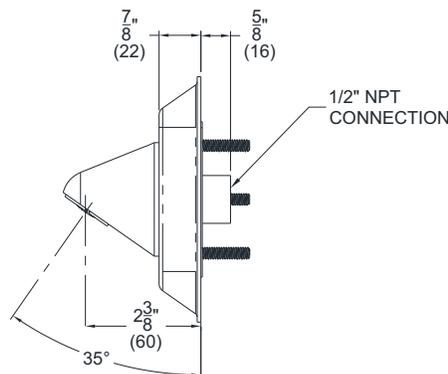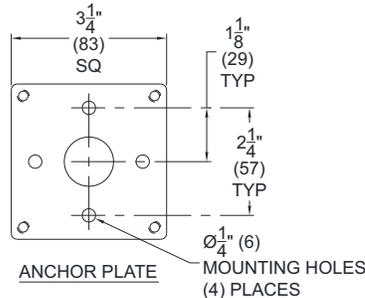

**DISCLAIMER:**

This product is designed to decrease the probability that it may be utilized as an apparatus for ligature. It is not a replacement for professionals who are trained in the proper evaluation, management and supervision of persons at risk of suicide.

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**SELECTION SUMMARY & APPROVAL FOR MANUFACTURING**

Model Number & Options \_\_\_\_\_ Quantity \_\_\_\_\_  
 Company \_\_\_\_\_ Date \_\_\_\_\_  
 Contact \_\_\_\_\_ Title \_\_\_\_\_  
 Approval for Manufacturing/Signature \_\_\_\_\_



All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data © Whitehall Manufacturing, Member of Morris Group International. Please visit [www.whitehallmfg.com](http://www.whitehallmfg.com) for most current specifications.