


TERRAZZO FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

ROUND NICKEL BRONZE TOP WITH TERRAZZO RECESS

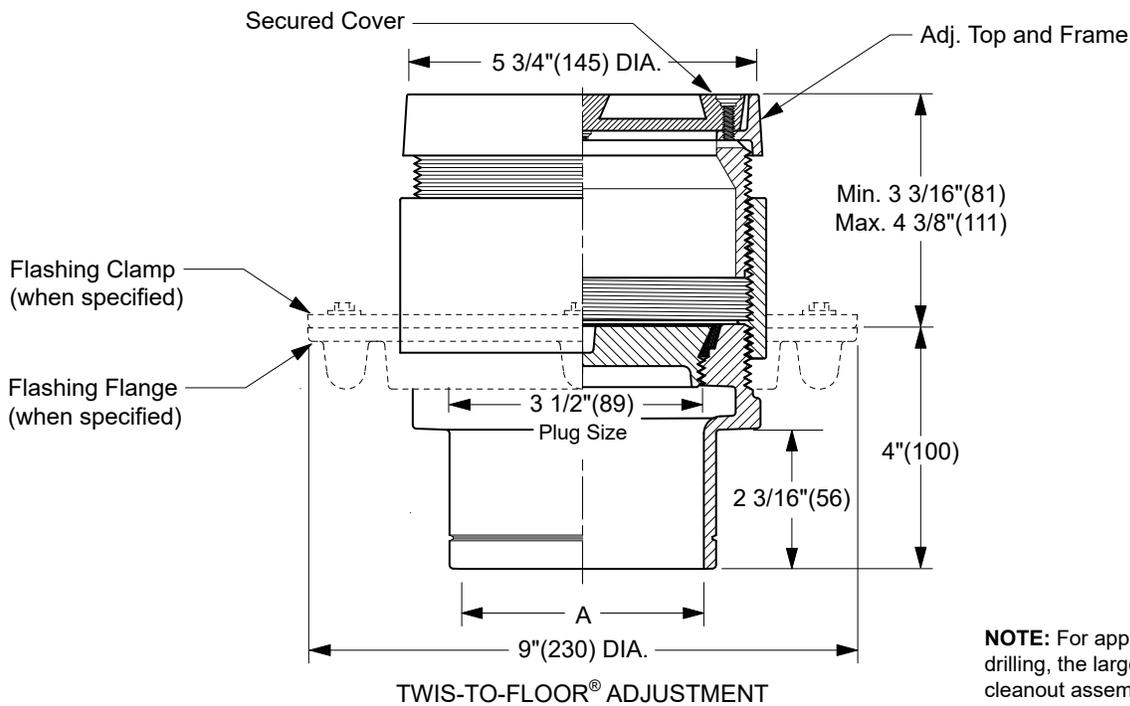

NOTE: For applications using core drilling, the largest diameter of the cleanout assembly is 6 5/16" (160).

TWIS-TO-FLOOR® ADJUSTMENT

NO-HUB OUTLET

"A" (Pipe Size) = 02(50), 03(75), 04(100) or 05(125)

Conforms to ASME A112.36.2/CSA B79.2

- Fig. 4180S.....Gasket Seal - ABS Plug
- Fig. 4181S.....Gasket Seal - Bronze Plug
- Fig. 4183S.....Taper Thread - Bronze Plug
- Fig. 4184S.....Taper Thread - ABS Plug

(Twis-to-Floor® design shown with gasketed plug.)

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Duco Cast Iron Cleanout with Round Adjustable Secured Nickel Bronze Top with 1/2"(13) Terrazzo Recess. Closure Plug Type as Indicated By Figure Number Selected.

VARIATIONS:

- Flashing Flange -F
- Flange with Flashing Clamp -F-C
- Vandal Proof Top -U

OPTIONAL MATERIALS:


- Galvanized Cast Iron -G
- Polished Bronze Top -PB

DRAWING NUMBER: S4180
 SIZE: A
 SCALE: NONE
 DATE: 2-16-70
 APPROVED BY: JM
 CHECKED BY: BH
 DRAWN BY: RK
4180 SERIES
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 P
 N
 M
 L
 REV. DATE DESCRIPTION BY CKD. BY

	4-11-24	Added ASME Note	HS	CL			
	8-16-23	Removed Function	HS	CL			
	1-20-22	Removed "C.O." cast in"	KK	CL			
	12/17/04	Added Core-Drilling Note	JJ	CL			
WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER					
		4180 SERIES					

TERRAZZO FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

ROUND NICKEL BRONZE TOP WITH TERRAZZO RECESS

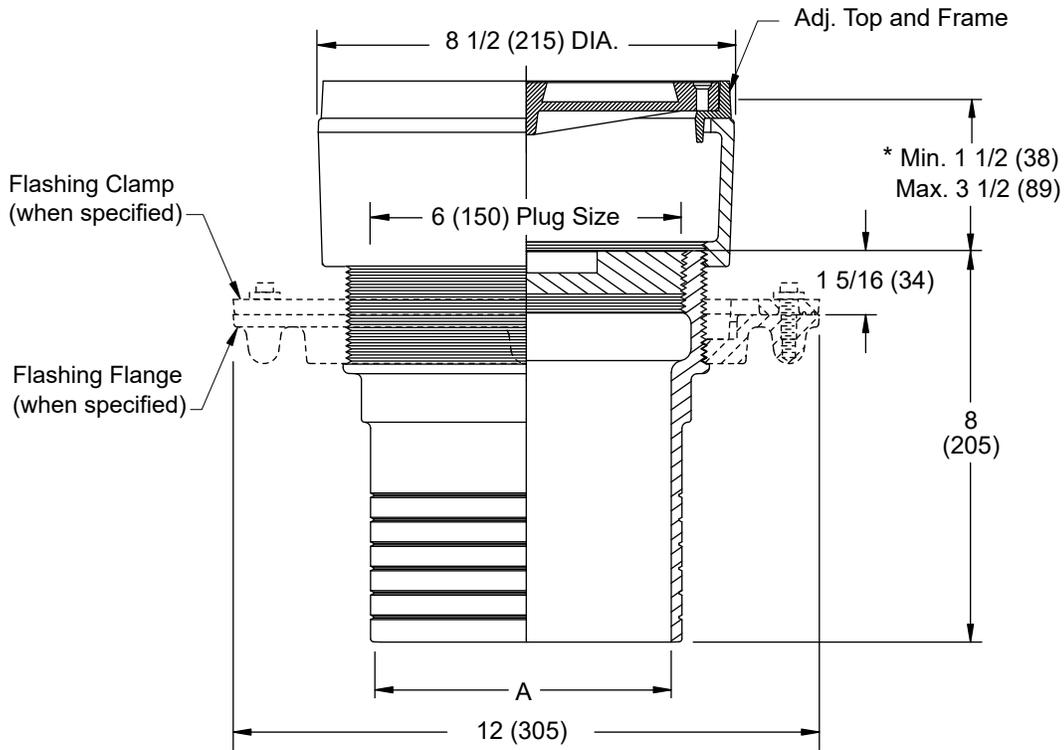

SPIGOT OUTLET ▲

"A" (Pipe Size) = 06(150) & 08(200)

Conforms to ASME A112.36.2/CSA B79.2

"TWIS-TO-FLOOR®" ADJUSTMENT

SPIGOT OUTLET ▲

Fig. 4183S.....Taper Thread - Bronze Plug

▲ Sized for Service Weight and/or NO-HUB.

* When Flange-F is specified Min. 1 1/2 (38) becomes 2 (51)

REGULARLY FURNISHED:

Duco Cast Iron Cleanout with Taper Thread Bronze Plug and Round Adjustable Secured Nickel Bronze Top with 1/2 (13) Terrazzo Recess.

VARIATIONS:

- Flashing Flange -F
- Flange with Flashing Clamp -F-C
- Vandal Proof Top -U

OPTIONAL MATERIALS:

- Galvanized Cast Iron -G
- Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S4180BS
SIZE A
SCALE: NONE
DATE: 5-5-06
APPROVED BY: CEL
CHECKED BY: CL
DRAWN BY: RN
4183

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

FIGURE NUMBER	B A	4-11-24 8-16-23	Added ASME Note Removed Function	HS HS	CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4183
REV.	DATE	DESCRIPTION	BY	CKD. BY				