

## A172FGVR-BF1S Series

BARRIER FREE, 14 GAGE STAINLESS STEEL, ENHANCED VANDAL RESISTANCE, BI-LEVEL, WALL MOUNTED DRINKING FOUNTAIN WITH -BF1S PUSHBUTTON OPERATED BOTTLE FILLER

### STANDARD FEATURES

#### Drinking Fountain

- Child or Adult ADA Compliant (when properly installed)
- 14 gage 304 Stainless Steel Apron, Basin and Front Access Panel
- Lead Free Stainless Steel, Anti-Rotation, Non-Squirt Bubblers
- Vandal Resistant Screws
- Hanging Bracket provided
- Auto-Stop allows service of Cartridge and Strainer without Shutting off Water Supply

#### Bottle Filler

- ADA Compliant
- 100-Mesh Inlet Strainer
- 1 GPM Laminar Flow



Model A172400S-FG-VR-BF1S Shown  
PATENT# 10,100,933

 **Maintenance Advantage**<sup>®</sup>  
Water Cooler by Murdock Manufacturing

**“RATED FOR INDOOR USE ONLY”**

### SUGGESTED SPECIFICATIONS

#### Drinking Fountain

Model A172400S-FG-VR-BF1S is a self-contained, enhanced Vandal Resistant Bi-Level Drinking Fountain. Units shall be activated by flush mounted Chrome Plated Brass Pushbuttons using less than 5 pounds of force. Bubblers shall be Lead-Free Stainless Steel with an integrally designed non-squirt feature and operate on water pressure range of 20-105 PSIG. **Unit shall be constructed from 14 gage type 304 stainless steel** and have an Integral Drain. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Optional WF3000 PFAS Water Filter shall have 3000 gallon capacity with 3rd Party Certification for Lead, Bacteria, Chlorine, Microplastics, and NSF/ANSI for Cyst and total PFAS reduction. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.

#### Bottle Filler BF1S

BF1S is a Pushbutton operated Bottle Filler. Housing construction will be 18 gage Stainless Steel with a satin finish. Bottle Filler shall provide approximately 1 GPM flow rate with a Laminar Flow Spout to minimize splashing. Bottle Filler shall be activated using a pneumatically operated Hemispherical Pushbutton using less than 5 pounds of force.

#### MODEL:

(Must Specify)

- A172400S-FG-VR-BF1S Satin Stainless Finish with Pushbutton Operated Bottle Filler

#### OPTIONS:

(Additional costs may apply.)

- LOGO Customer Specified Logo / Graphics
- RBL Reverse Bi-Level

#### ACCESSORIES:

(Additional costs may apply. Accessory items are packaged separately.)

- CSC3 Concealed Support Carrier
- WF3000 3000-Gallon PFAS Water Filter<sup>1</sup>  
NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics
- SK9 Cane Detection Skirt for Upper Unit<sup>1</sup>  
(Skirt finish provided to match model selected)

#### NOTES:

1- Refer to Supplemental Submittal Sheet for details.

Complies with the following standards:



Federal Public Law 111-380 (No Lead)

NSF/ANSI/CAN 61

#### NSF/ANSI/CAN 61: Q ≤ 1




NSF/ANSI/CAN 61 Compliant including lower lead leaching criteria.

[3000 Gallon PFAS Filter Certifications](#) [Product Warranty](#)

 WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**A172FGVR-BF1S Series**

BARRIER FREE, 14 GAGE STAINLESS STEEL,  
ENHANCED VANDAL RESISTANCE, BI-LEVEL,  
WALL MOUNTED DRINKING FOUNTAIN WITH  
-BF1S PUSHBUTTON OPERATED BOTTLE FILLER

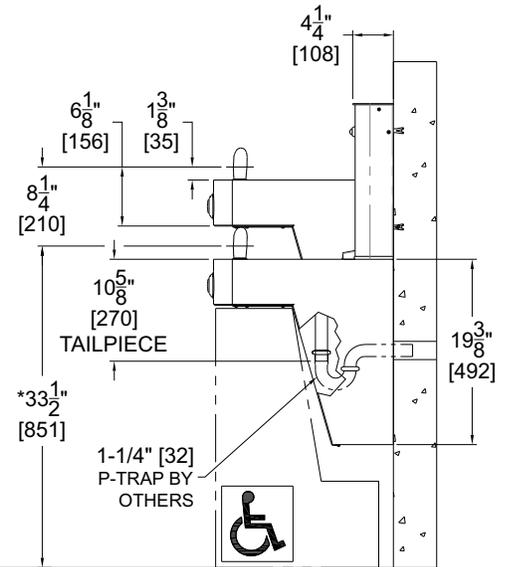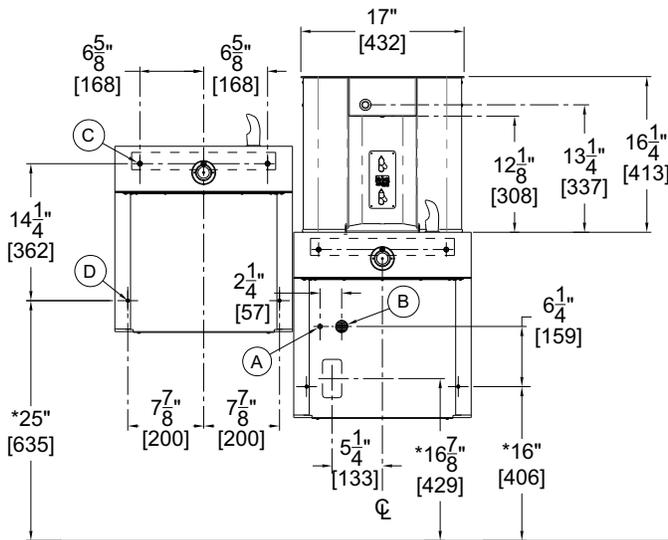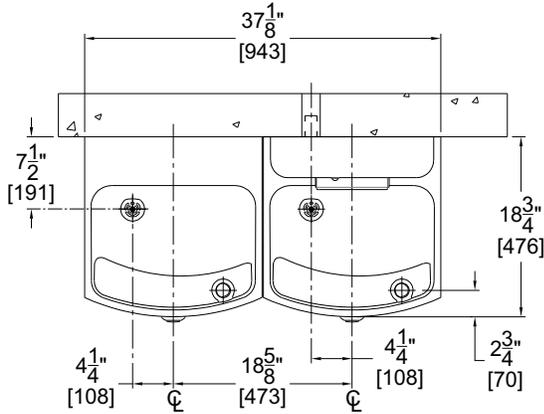

**General Notes:**

1. All dimensions are in inches [MM]
2. Allow 4 inches [102MM] minimum clearance per side for ventilation
- \*3. Dimensions shown are for ADA adult height. Adjust vertical dimensions as necessary to comply with Federal, State & Local Codes
4. Stop Valve, P-Trap & Electrical Outlet not supplied
5. Important: Unit must be attached to wall with appropriate Anchor Screws

- A. 3/8" O.D. Supply Inlet
- B. Waste Outlet for 1-1/4" P-Trap, by others
- C. Ø3/8" Hanger Bracket Punching, 3 places for Anchoring Hardware by others
- D. Ø1/4" Punching, 2 places for Anchoring Hardware, by others

**IMPORTANT: Dimensions are shown for reference only. Refer to product Installation Manual for complete details prior to Rough-in.**

**SELECTION SUMMARY & APPROVAL FOR MANUFACTURING**

Model Number & Options \_\_\_\_\_ Quantity \_\_\_\_\_

Company \_\_\_\_\_

Contact \_\_\_\_\_ Title \_\_\_\_\_

Signature (Approval for Manufacturing) \_\_\_\_\_ Date \_\_\_\_\_

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock® Mfg., Member of Morris Group International®, Please visit [www.murdockmfg.com](http://www.murdockmfg.com) for most current specifications.