


TRAFFIC FLOOR DRAINS

HEAVY DUTY PACKING HOUSE DRAIN

Load Rating: Special Duty having a Safe Live (Static) Load equal to or greater than 10,000lbs (4500 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

DRAWING NUMBER S2488
SIZE A
SCALE: NONE
DATE: 5-17-85
APPROVED BY: TD
CHECKED BY: TD
DRAWN BY: PJ
FIGURE NUMBER 2488

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

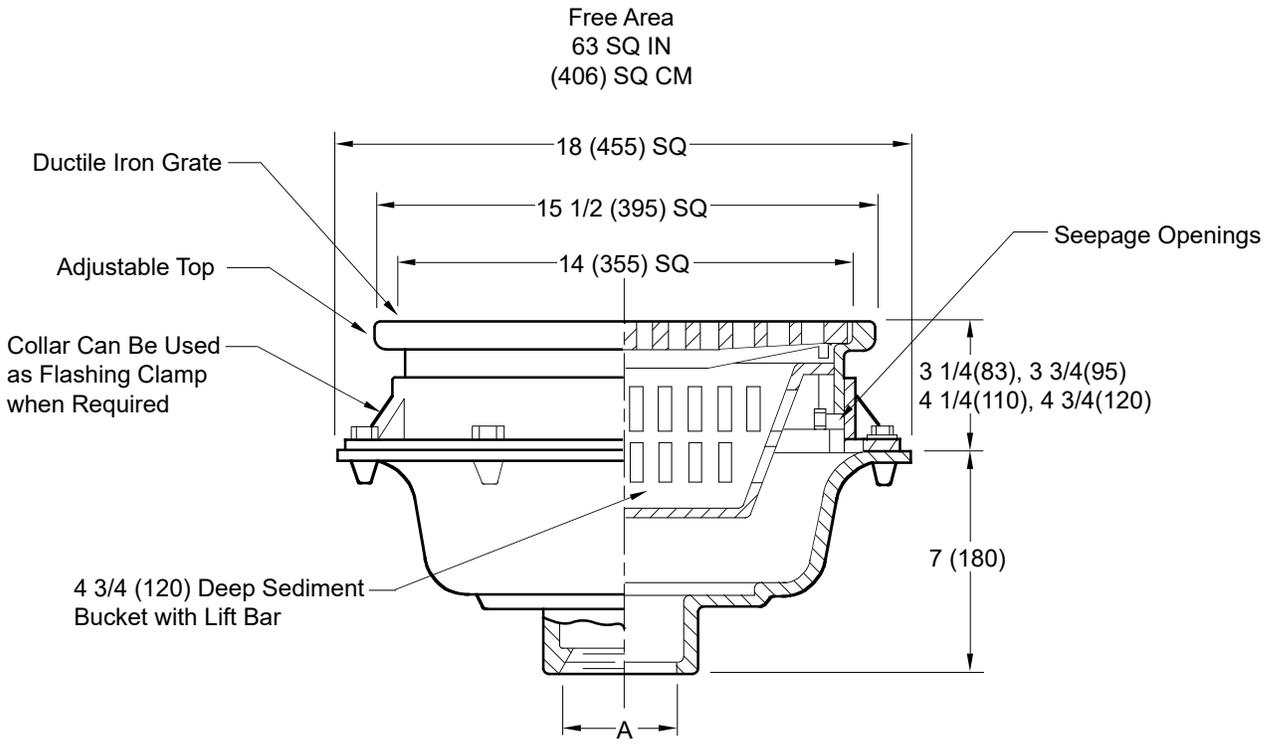

A (Pipe Size) = 03(75), 04(100), 05(125) or 06(150)

- Fig. 2488C . . . CAULK OUTLET
- Fig. 2488T . . . THREADED OUTLET
- Fig. 2488Y . . . NO-HUB OUTLET

REGULARLY FURNISHED:
 Duco Cast Iron Body, Flashing Collar and Adjustable Top with Ductile Iron Grate and Cast Iron Sediment Bucket.

- VARIATIONS:**
- Adjustable Extensions 5"(125) to 6 1/2(165) -E
 - Flat Bottom Strainer -FBS
 - Less Bucket (Specify Fig. 2487)
 - Vandal Proof Grate -J
 - Quad Close Trap Seal (Specify Fig. 2692)
 - Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19)

- OPTIONAL MATERIALS:**
- Aluminum Bucket -AB
 - Galvanized Cast Iron -G
 - Acid Resistant Coated Inside -ARI
 - Acid Resistant Coated Inside & Outside -ARIO
 - Nickel Bronze Top -NB
 - Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							2488