
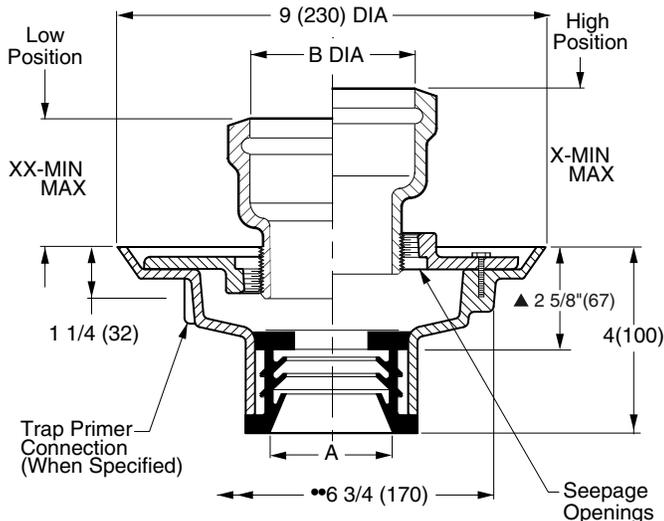


# FLOOR DRAIN WITH HUB ADAPTOR

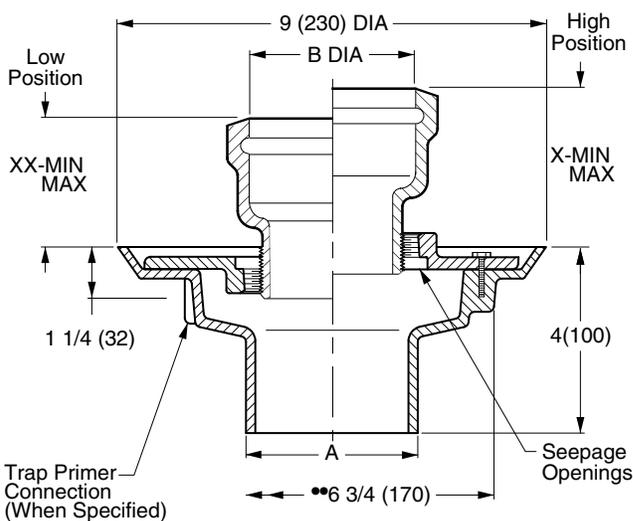

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

**NO-HUB OUTLET**

Fig. 2005Y.....w/2645

**SPEEDI-SET OUTLET**

Fig. 2005L.....w/2645

- ▲ This dimension to internal stop of speedi-set gasket.
- Collar is reversible to obtain extreme high and low strainer positions.
- MIN 6 3/4" (170) hole required for core drilled application.

● Collar in High Position		● Collar in Low Position		Adaptor Size	
X		XX		B	
MIN	MAX	MIN	MAX		
3 1/2 (89)	4 5/8 (117)	3 (76)	4 1/8 (105)	03 (80)	04 (100)

**REGULARLY FURNISHED:**  
 Duco Cast Iron Body with Flashing Collar and Adjustable Cast Iron Soil Pipe Hub Adaptor.

**VARIATIONS**

- L Speedi-Set Service Weight 2(50), 3(75) & 4"(100) only
- LXH Speedi-Set Extra Heavy 2(50), 3(75) & 4"(100) only
- Trap Primer Connection -P050 1/2" (13) & -P075 3/4" (19)
- T Threaded Outlet
- Squeeze In Backwater Valve -V

**OPTIONAL MATERIALS:**

- Bronze Body -BB
- Galvanized Cast Iron Body -G
- Nickel Bronze Hub Adaptor -NB

Meets ASME Standard A112.6.3-2001  
 02(50), 03(75) or 04"(100) sizes only.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER  
**S2005 w/2645-CAN**

SIZE  
**A**

SCALE:  
**NONE**

DATE:  
**11-28-06**

APPROVED BY:  
**AM**

CHECKED BY:  
**AM**

DRAWN BY:  
**RN**

FIGURE NUMBER  
**2005 w/2645-CAN**

REV.	DATE	DESCRIPTION	BY	CKD.
D	8-20-25	Revised Drawing	TB	CL
C	5-07-07	Rev. Var.	JJ	AM
B	4-24-07	Rev. B DIM.	RN	AM
A	11-30-06	Rev. Reg. Fun. & Opt. Mat's.	RN	AM

WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
		<b>2005 w/2645-CAN</b>