



**Secur-Care® - Ligature Resistant LR1418FA Series**  
 18" Lav/Toilet - Ligature Resistant Comby with Lavatory Oval Shaped Bowl - Front Access



LR1418FA-2-CT-04-FVH

Fixture May Show Some Available Options



Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

**18" Lav/Toilet - Ligature Resistant Comby with Lavatory Oval Shaped Bowl - Front Access**

**Fixture** is arranged to be installed and serviced on finished wall through Access Panels. Panels are located on sides of Cabinet and are secured with tamper-resistant screws. Fixture is fabricated from 14 gage type 304 stainless steel cabinet and toilet bowl, polished to a satin finish. Cabinet interior is sound-deadened with fire-resistant material. Optional Wall Sleeve or Metal Template is recommended for all installations to provide required wall openings. Engineered to reduce possible risk of the fixture being used as a ligature device.

**Lavatory Oval Shaped Bowl** is 14-5/8" x 9-5/8" x 5" deep. Standard P-Trap waste outlet is 1-1/2" O.D. plain end.

**Optional Valve** may be an Air-Control pneumatically operated, hemispherical pushbutton valve using atmospheric air. Pushbutton is vandal-resistant and requires less than 5 pounds of force to activate Valve. Valve is direct acting, non-metering type and is optionally available as metering with non-hold open feature. Metering Valve timing is adjustable from 5 to 60 seconds. Valve includes a 0.5 GPM Flow Control. Valve and Bubbler conform with lead free requirements for NSF61, Section 9 and CHSC 116875.

**Toilet** is blowout jet type with ligature resistant elongated bowl manufactured to ASME A112.19.3 and CSA B45.4 requirements and will flush with a minimum of 25 PSI flow pressure. Trap has minimum 3-1/2" seal and will pass a 2-1/8" ball. Toilet waste outlet is Gasketed Waste.

**Regularly Furnished** items include a Hydraulic Flush Valve, a fast drain, a removable P-Trap, an integral self-draining Soap Dish, and mounting hardware. Wall Anchors by others.

**GUIDE SPECIFICATION**

Provide and install Secur-Care® - Ligature Resistant 18" wide Lav/Toilet Comby - Front Access (Specify model number and options), arranged to be installed on finished wall through Access Panels. Provide hemispherical cabinet design to reduce risk of fixture being used as a ligature device. Fixture shall be fabricated from type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall have a satin finish. Provide oval shaped lavatory bowl. Fixture shall have an Air-Control pneumatically operated, pushbutton valve. Valve shall require less than 5 pounds to activate. Valve and bubbler conform with lead-free requirements for NSF61, section 9 and CHSC 116875. Provide Hemispherical Penal Bubbler and Hemispherical Penal Pushbutton. Provide toilet bowl housing to prohibit the attachment of objects. Toilet shall be concealed blowout jet type with an elongated bowl, self-draining flushing rim, and an integral contoured seat. Toilet shall meet ASME A112.19.3 and CSA B45.4 requirements and will flush with a minimum of 25 PSI flow pressure. Toilet trap shall have a minimum 3-1/2" seal that shall pass a 2-1/8" diameter ball and shall be fully enclosed. Cabinet interior shall be sound-deadened with fire-resistant material. Fixture shall withstand loading of 5,000 pounds without permanent damage. Fixture shall be furnished with necessary fasteners for proper installation.





# Secur-Care® - Ligature Resistant LR1418FA:

18" Lav/Toilet - Ligature Resistant Comby with Lavatory Oval Shaped Bowl - Front Access



**NOTES:**

- 1. HEMISPHERICAL BUBBLER
- 2. HEMISPHERICAL LAVY VALVE PUSHBUTTONS
- 3. HYDRAULIC FLUSH VALVE PUSHBUTTON SHOWN
- 4. ACCESS PANELS
- 5. WALL MOUNTING ANCHORS (BY OTHERS)

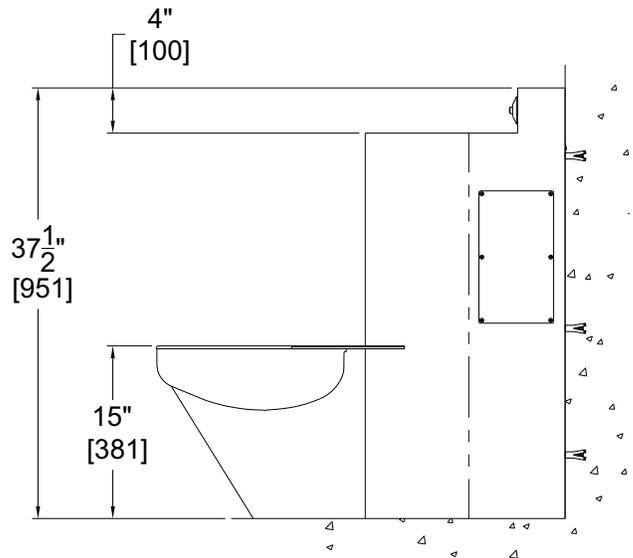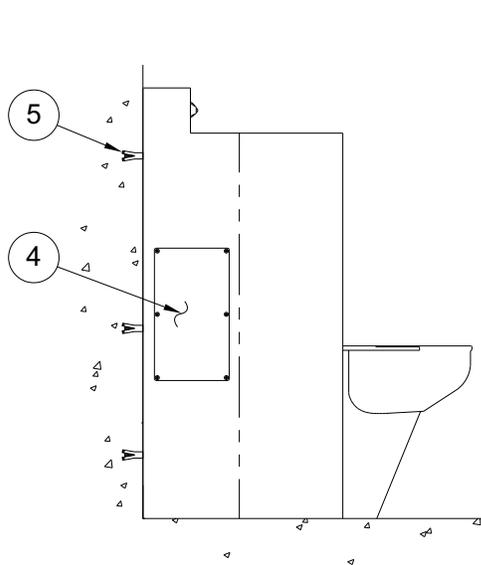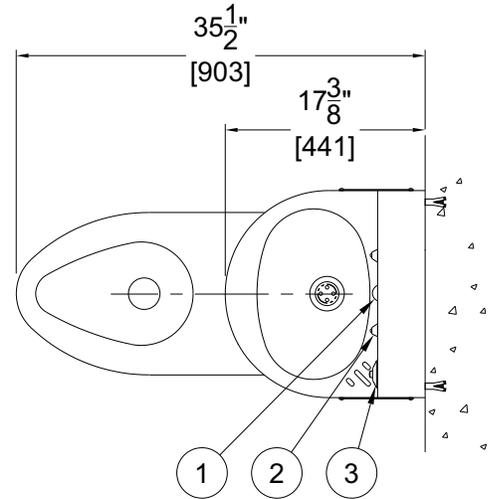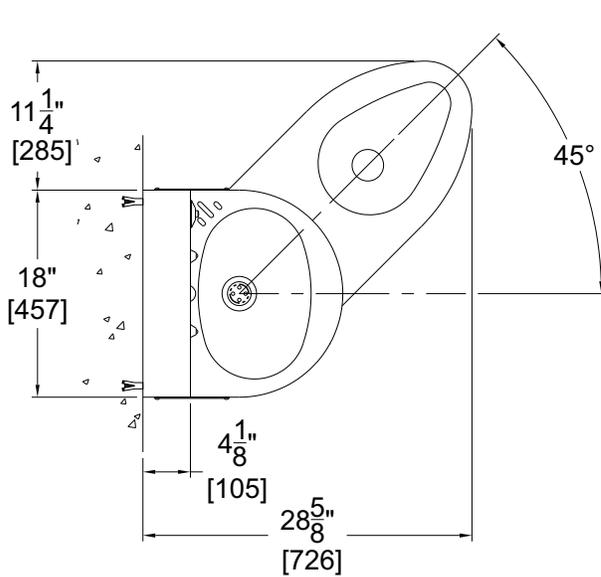

LR1418FA-AR-2-04 Shown. -AL Opposite.

LR1418FA-CT-2-04

# Secur-Care® - Ligature Resistant LR1418FA:

18" Lav/Toilet - Ligature Resistant Comby with Lavatory Oval Shaped Bowl - Front Access



### WALL THICKNESS AND TYPE (Must Specify)

Thickness: \_\_\_\_\_ Type:  Concrete  Block  Steel

### MODEL AND OPTIONS SELECTION:

#### BASE MODEL NUMBER

LR1418FA 18" Lav-Toilet Ligature Resistant Comby - Front Access

#### TOILET ORIENTATION (Must Specify)

- AL Angled Left
- AR Angled Right
- CT Centered Toilet

#### FIXTURE MOUNTING AND WASTE (Must Specify)

- 2 On-Floor, Wall Outlet
- 3 On-Floor, Floor Outlet

#### VALVE SELECTION (Must Specify)

##### Air-Trol (Pneumatic)

- 03 Single Temp, Non-Metering
- 03-M Single Temp, Metering
- 04 Hot & Cold, Non-Metering
- 04-M Hot & Cold, Metering
- 04-MH Hot & Cold, Metering Hot Side Only

##### Master-Trol (Electronic)

- EVS1 Single Temp
- EVS2 Hot & Cold
- EVSP1 Single Temp, Piezo Button
- EVSP2 Hot & Cold, Piezo Buttons

##### Master-Trol PLUS (Electronic)

- MTP1 Single Temp
- MTP2 Hot & Cold
- MTPP1 Single Temp, Piezo Button
- MTPP2 Hot & Cold, Piezo Buttons

##### -MTP VALVE OPTION

- PFB Power Failure Bypass  
(Provides drinking water in the event of power failure)

##### Time-Trol (Electronic)

- MVC1 Single Temp
- MVC1-BAT Single Temp Battery Powered  
(Batteries Not Included)
- MVC2 Hot & Cold
- MVC2-BAT Hot & Cold Battery Powered  
(Batteries Not Included)

##### Programmable (Electronic) w/9VDC Plug-In Transformer

- PPZ1 Single Temp Programmable Piezo Button
- PPZ2 Hot & Cold Programmable Piezo Button

##### Valve By Others

N/A

#### VALVE OPTIONS

- BRS Brass Body Valve
- CI Cycle Interrupt for Time-Trol Valves  
Transformer, 120VAC to 24VAC
- TF (-MVC option only)

#### FLUSH VALVE GPF's (Must Specify)

- 1.28 GPF
- 1.6 GPF (Not available for sale/use in the State of California)

#### FLUSH VALVE OPTIONS (Must Specify)

- EVSFV Master-Trol Electronic Flush Valve
- EVSPFV Master-Trol Electronic Flush Valve w/ Piezo Button
- FVBO Flush Valve by Others (Select with 2898 & 2802 Covers)
- FVH Flush Valve, ADA Hydraulic (-W and -W-ADA Only)
- MTPFV Master-Trol PLUS Electronic Flush Valve
- MTPPFV Master-Trol PLUS Electronic Flush Valve w/ Piezo Button
- MVCFV Time-Trol® Flush Valve (-W and -W-ADA Only)

#### CABINET OPTIONS

- FMT Fixture Mounted Trim
- PHL Paper Holder Left (For -AR or -CT Comby)
- PHR Paper Holder Right (For -AL or -CT Comby)
- TG 12 Gage Cabinet
- THL Towel Hook Left
- THR Towel Hook Right

#### LAVATORY WASTE OPTIONS

- CW Combined Waste\*  
\*NOTE: Reduces Ligature Resistance due to Lavy Waste Drain Hole located within Toilet Bowl.

#### TOILET OPTIONS

- FT Flood-Trol (Manual Reset)\*\*
- FTA Flood-Trol, Auto-Reset\*\*
- FTE Flood-Trol, Electronic\*\*  
\*\*NOTE: Reduces Ligature Resistance due to Toilet Bowl Sensor Fitting.
- HPS High Polish Seat
- TSC Toilet Shipping Cover

#### PRODUCT OPTIONS

- EGE Enviro-Glaze Color Specify: \_\_\_\_\_  
Toilet Exterior Only
- LPFV Less Punching for Flush Valve
- MT Metal Template (Only 1 Required Per Project)
- SW Wall Sleeve
- VAC Acorn Vac System

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

<b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. <small>Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2009 Acorn Engineering Company</small>	
<p style="text-align: center;">Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>