


## FLOOR DRAINS STAINLESS STEEL - CARBON STEEL

### 12" (305) ROUND TOP - HEAVY DUTY DRAIN WITH TRACTOR GRATE

Free Area  
28.66 SQ IN  
(185) SQ CM

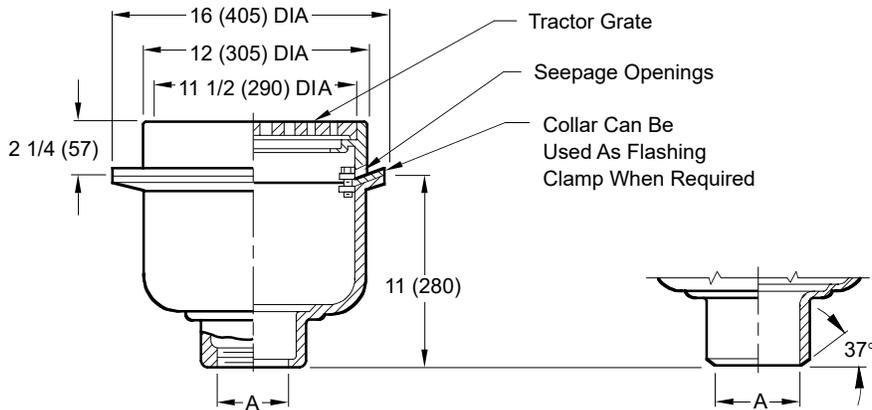

**Butt Weld Outlet**

A (Pipe Size) = 03(75), 04(100), 05(125) or 06(150)

- Fig. 9734C . . . . CAULK OUTLET
- Fig. 9734T . . . . THREADED OUTLET
- Fig. 9734Y . . . . NO-HUB OUTLET

Schedule 40 Regularly Furnished

**REGULARLY FURNISHED:**

CF8 (Equivalent to Type 304) Rough Finish Stainless Steel Body, Flashing Collar with Seepage Openings and Rough Bronze Tractor Grate.

**VARIATIONS:**

- 4(100) or 6"(150) Dia. Funnel (Specify Fig. 9703)
- 8 3/4(220) x 3 3/4"(95) Funnel (Specify Fig. 9704)
- Satin Finish Top -SF
- Sediment Bucket -B
- Vandal Proof Grate -U
- 90° Side Outlet (Specify Fig. 9759)
- BW Butt Weld Outlet (Specify Schedule -S05, -S10, -S40)

**OPTIONAL MATERIALS:**

- A-27 Carbon Steel -A27
- Cast Iron Grate -CIG
- CF8M (Equivalent to Type 316) Stainless Steel -316
- CF8 (Rough) Stainless Steel Grate -RG
- Ductile Iron Grate -M
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

**Design Pressures and Temperatures**

1. With proper outlet connection, shall be watertight up to 10 ft. of water column (4.34 psig).
2. When exposed to effluent appropriate for drain material, the drain shall withstand effluent temperatures of 180 degrees F at ambient pressure.

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER **S973**  
 SCALE: **NONE**  
 DATE: **11-12-84**  
 APPROVED BY: **TD**  
 CHECKED BY: **VG**  
 DRAWN BY: **PJ**  
**9734**  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

G F E D	8-28-23 2-16-22 10-18-11 4-28-06	Removed Function Added NO-HUB Outlet option Added Note Revised Variations	HS KK TBW RN	CL CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	<b>FIGURE NUMBER</b>  <b>9734</b>
REV.	DATE	DESCRIPTION	BY	CKD. BY			