


CLEANOUT STAINLESS STEEL - CARBON STEEL

8 1/2" (215) ROUND ADJUSTABLE TOP SOLID SCORIATED COVER AND CLOSURE PLUG

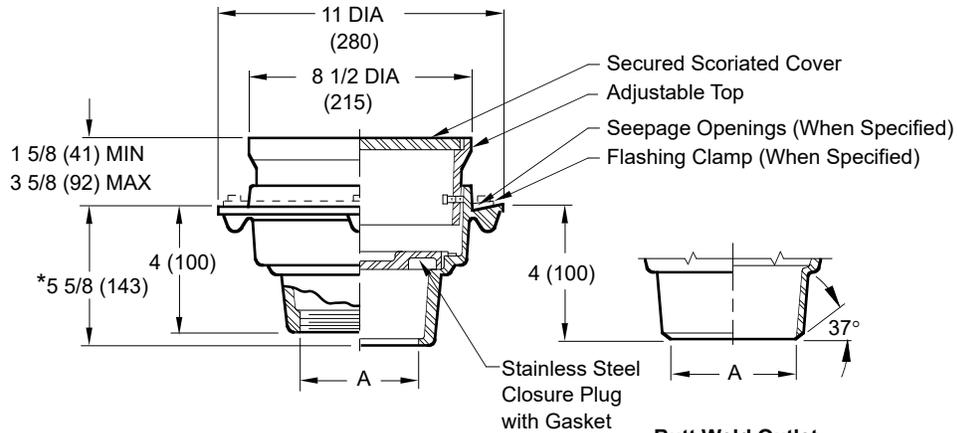

*5 1/8"(130) for NO-HUB Outlet.

A (Pipe Size) = 02(50), 03(75) or 04(100)

Butt Weld Outlet
 Schedule 40 Regularly Furnished (Specify Schedule if Different -S05, -S10 or -S80)

- Fig. 9735BW BUTT WELD OUTLET
- Fig. 9735C CAULK OUTLET
- Fig. 9735T THREADED OUTLET
- Fig. 9735Y NO-HUB OUTLET

REGULARLY FURNISHED:

CF8 (Equivalent to Type 304) Rough Finish Stainless Steel Body, Adjustable Top, Secured Scoriated Cover and Gasketed Stainless Steel Closure Plug.

VARIATIONS:

- 4" (100) Extension -E04
- Plastic Closure Plug and Gasket -XPP
- Closure Plug with 3/4" (19) Test Plug -TP (Specify Material)
- Flashing Clamp with Seepage Holes -C
- Satin Finish Top -SF
- Seepage Holes -WSH
- Vandal Proof Cover -U
- 90° Side Outlet (Specify Fig 9759)

OPTIONAL MATERIALS:

- A-27 Carbon Steel -A27
- CF8M (Equivalent to Type 316) Stainless Steel -316

Design Pressures and Temperatures

1. With proper outlet connection, shall be watertight up to 10 ft. of water column (4.34 psig).
2. When exposed to effluent appropriate for drain material, the drain shall withstand effluent temperatures of 180 degrees F at ambient pressure.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER
 S9735

SIZE
 A

SCALE:
 NONE

DATE:
 11-12-84

APPROVED BY:
 TD

CHECKED BY:
 VGD

DRAWN BY:
 PJ

FIGURE NUMBER
 9735

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

M	10-6-24	Revised Schedule	HS	JT	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 9735
L	8-28-23	Removed Function	HS	CL			
K	12-1-14	Add BW & NO-HUB, Rev. Var, Add Note	TBW	CL			
J	6-19-13	Revised Dimension	TBW	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			