

Model RVSK Spool Kit



PRESSURE REDUCING VALVES

APPLICATION:

Series RVSK Spool Kits are designed as a temporary spacer in potable water systems. The face-to-face length of the spool piece matches that of the **MGI CONTROLS®** RV03. These are intended for installation in newly constructed systems to both deter theft and help prevent valve damage caused by start-up debris. The Spool Kit permits testing of the piping for leaks and pressure loss while providing means to flush piping systems prior to installing the PRV. The kit allows for fast and easy replacement with the Pressure Reducing Valve and features Lead Free construction suitable for water supply pressures up to 400psi (27.6bar) and temperatures up to 180°F (82.2°C).



RVSK-1CC0 Shown



FEATURES:

- Available Sizes 1/2” to 1-1/4” with Sweat, NPTF, PEX A & B, Press and CPVC Adapter Kits
- Integral 300 Series Stainless Steel Strainer
- Lead Free* Construction
- EPDM Gaskets
- Engineered UV Resistant Thermoplastic
- Optional Pressure Gauge Available

SPECIFICATIONS:

- **Pressure Rating 400 PSI (2758 kPa)
- **Temperature Rating 180°F (82.2°C)

* The wetted surface of these valves contacted by consumable water contains less than 0.25% of lead by weight in conformance with national lead-free law.

** Temperature and Pressure may be limited to the pipe being used.

MGI ConTrols® assumes no responsibility for use of void or superseded data. MGI ConTrols®, Lake Bluff, IL, a member of Morris Group International®. Please visit www.mgicontrols.com for most current specifications.

Submittal # **RVSK**
Revised: 08/15/2024 Page 1 of 2

NSF/ANSI - 372




MGI ConTrols®
42 Sherwood Terrace, Suite #5
Lake Bluff, IL 60044
Phone: (847) 604-4773
www.mgicontrols.com

SPOOL KIT ORDER CUSTOMIZATION:



PRESSURE REDUCING VALVES

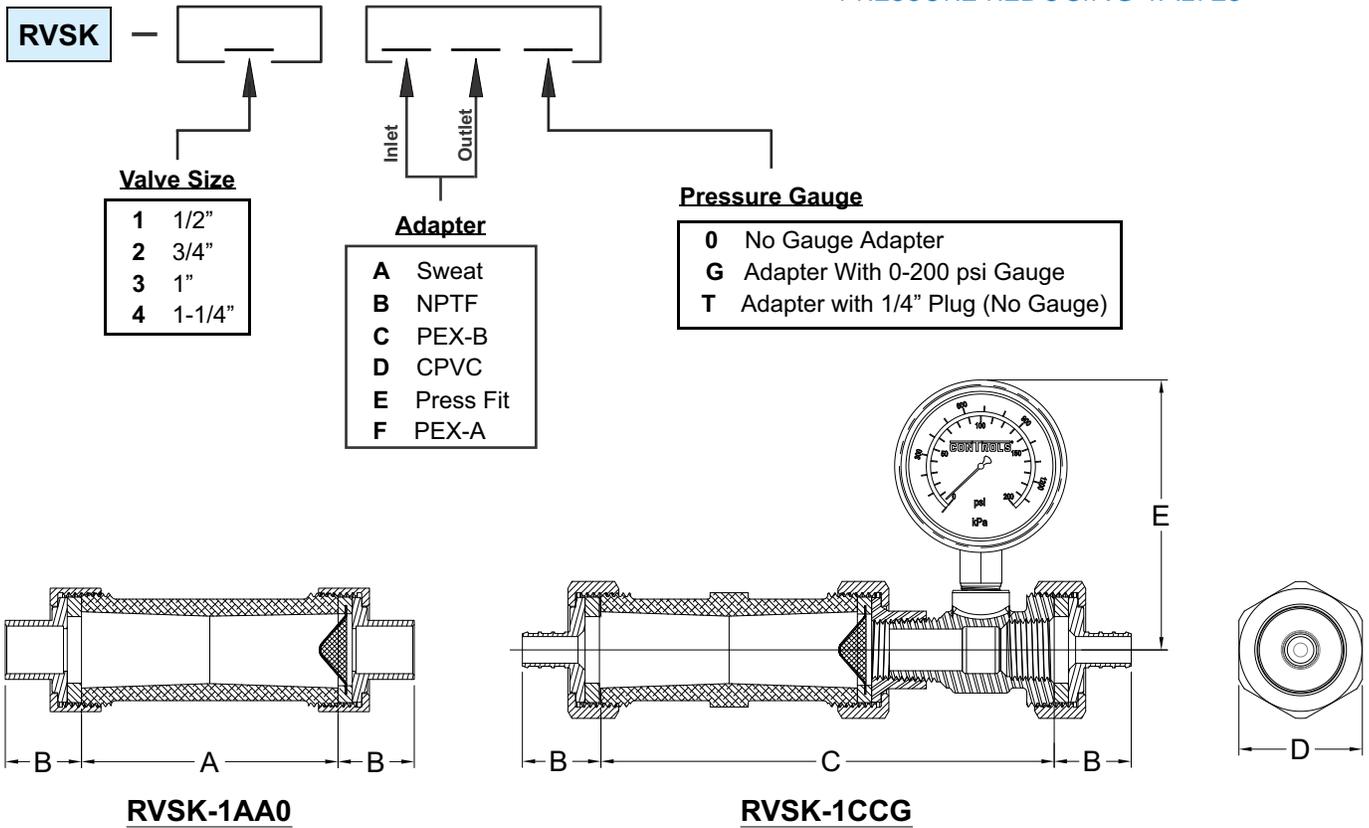

VALVE SIZE	ADAPTER	DIMENSION									
		A		B		C		D		E	
1/2"	Sweat	3-3/8"	86mm	1"	25mm	5-7/8"	149mm	1-5/8"	41mm	3-3/8"	86mm
	NPTF			7/8"	22mm						
	PEX-B			1"	25mm						
	CPVC			7/8"	22mm						
	Press Fit			1-1/4"	32mm						
	PEX-A			1-5/8"	41mm						
3/4"	Sweat	3-3/8"	86mm	1"	25mm	5-7/8"	149mm	1-5/8"	41mm	3-1/2"	89mm
	NPTF			7/8"	22mm						
	PEX-B			1"	25mm						
	CPVC			1-1/8"	29mm						
	Press Fit			1-3/8"	35mm						
	Pex-A			1-7/8"	48mm						
1"	Sweat	3-7/8"	98mm	1-1/8"	29mm	6-3/4"	171mm	1-7/8"	48mm	3-5/8"	92mm
	NPTF			1"	25mm						
	PEX-B			1-1/8"	29mm						
	CPVC			1-1/8"	29mm						
	Press Fit			1-3/8"	35mm						
	PEX-A			2"	51mm						
1-1/4"	Sweat	5"	127mm	1-1/4"	32mm	8"	203mm	2-3/8"	60mm	3-7/8"	98mm
	NPTF			1-1/8"	29mm						
	PEX-B			1-1/4"	32mm						
	CPVC			1-1/4"	32mm						
	Press Fit			1-5/8"	41mm						
	PEX-A			2-3/8"	60mm						