


OIL INTERCEPTORS

LARGE CAPACITY - STEEL OIL INTERCEPTORS

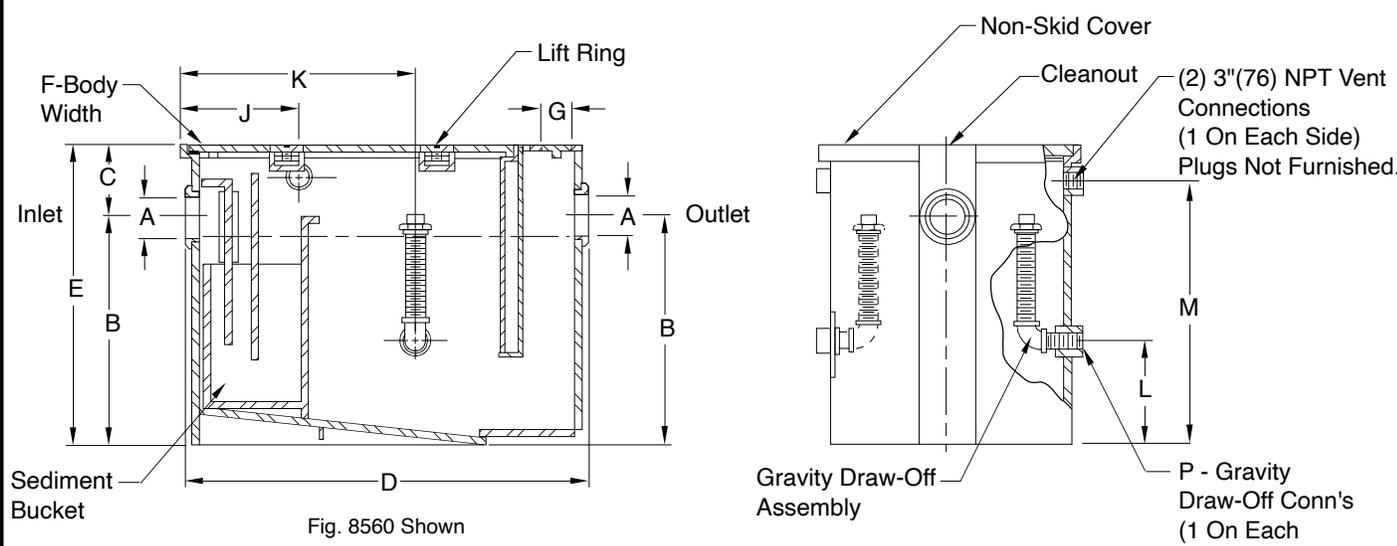

NOTE: Interceptor shall be vented on outlet side per local code requirements.

NOTE: It is the responsibility of the installer to check all parts (internal and external) to verify they are in their proper operating order and location.

(2) 3"(76) NPT Vent Connections (1 On Each Side) Plugs Not Furnished.

P - Gravity Draw-Off Conn's (1 On Each Side) Plugs Not Furnished

PCN/ Fig. No.	GPM Flow Rate	Inlet and Outlet Size	Dimensions						C.O. Plug Size	Dimensions					Draw- Off
			Roughing Dimensions				Body			G	J	K	L	M	
			A*	B	C	D	Height E	Width F							
8560	75	04(100)	21 1/2(545)	15 1/2(395)	50 (1270)	37(940)	30 1/2(775)	3(76)	21(535)	28 1/4(720)	13(330)	32 3/4(830)	2(51)		
8565	100	04(100)	27(685)	16 1/2(420)	54 (1372)	43 1/2(1105)	33 1/2(850)	3(76)	23(585)	30 1/4(770)	18 1/2(470)	39 1/4(995)	2(51)		
8570	150	05(125)	33(840)	17 1/2(545)	60 3/4(1543)	50 1/2(1283)	38 1/2(980)	4(100)	25 1/2(650)	34 1/4(870)	23 1/2(595)	46 1/4(1175)	2 1/2(64)		
8575	200	05(125)	37(940)	17 1/2(545)	67 3/4(1720)	54 1/2(1385)	43 1/2(1105)	4(100)	29(735)	38 1/4(970)	27 1/2(700)	50 1/4(1275)	2 1/2(64)		
8580	250	05(125)	40(1015)	18(455)	73 3/4(1875)	58(1473)	47 1/2(1205)	4(100)	32(815)	42 1/4(1075)	30 1/2(775)	53 3/4(1365)	2 1/2(64)		
8585	350	05(125)	43 1/2(1105)	18(455)	85 3/4(2178)	61 1/2(1562)	54 1/2(1385)	4(100)	38(965)	50 1/4(1275)	34(865)	57 1/4(1455)	2 1/2(64)		
8590	500	06(150)	48(1220)	18(455)	103 1/4(2623)	66(1615)	64 1/2(1640)	5(125)	46(1170)	62 1/4(1580)	38(965)	61 3/4(1570)	2 1/2(64)		

* Available with larger inlet and outlet when specified.

REGULARLY FURNISHED:
 Steel Interceptor with Gray Duco Coating Inside and Outside and Flow Control Fitting.

2"(51) min. extension available. Anchor flange & flashing clamp not available on less than 4"(100) extension.

- VARIATIONS:**
- Anchor Flange -F
 - Flange and Flashing Clamp -F-C
 - Integral Extension -E [Specify Height eg: -E12 for 12"(305) Ext.]
 - NO-HUB Adaptor (4) Req'd (Specify Fig. 2646Y)
 - Traffic Rated Cover-H20

- OPTIONAL MATERIALS:**
- Acid Resistant Coating Inside - ARI
 - Acid Resistant Coating Outside - ARO
 - Acid Resistant Coating Inside and Outside - ARIO
 - Aluminum Cover -AC
 - Coal Tar Epoxy Outside -CTO

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S8560
 SIZE A
 SCALE: NONE
 DATE: 12-11-84
 APPROVED BY: KG
 CHECKED BY: VGD
 DRAWN BY: PJ
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

N	7-27-23	Removed Function	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 8560
M	4-18-19	Revised Dimensions	MW	CL			
L	3-31-17	Revised Optional Materials	TBWN	TK			
K	5-5-06	Revised Drawing & Note	RN	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			