

9872 DUCTILE IRON SLOTTED GRATE SPECIFICATION SHEET



| | |
|----------------|---------|
| DRAWING NUMBER | s9872-M |
|----------------|---------|

| | |
|------|---|
| SIZE | A |
|------|---|

| | |
|--------|------|
| SCALE: | NONE |
|--------|------|

| | |
|-------|---------|
| DATE: | 1-26-16 |
|-------|---------|




| | |
|--------------|----|
| APPROVED BY: | MD |
|--------------|----|

| | |
|-------------|----|
| CHECKED BY: | MD |
|-------------|----|


| | |
|-----------|-----|
| DRAWN BY: | TBW |
|-----------|-----|

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

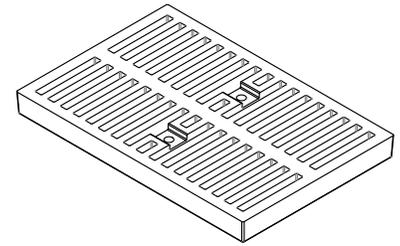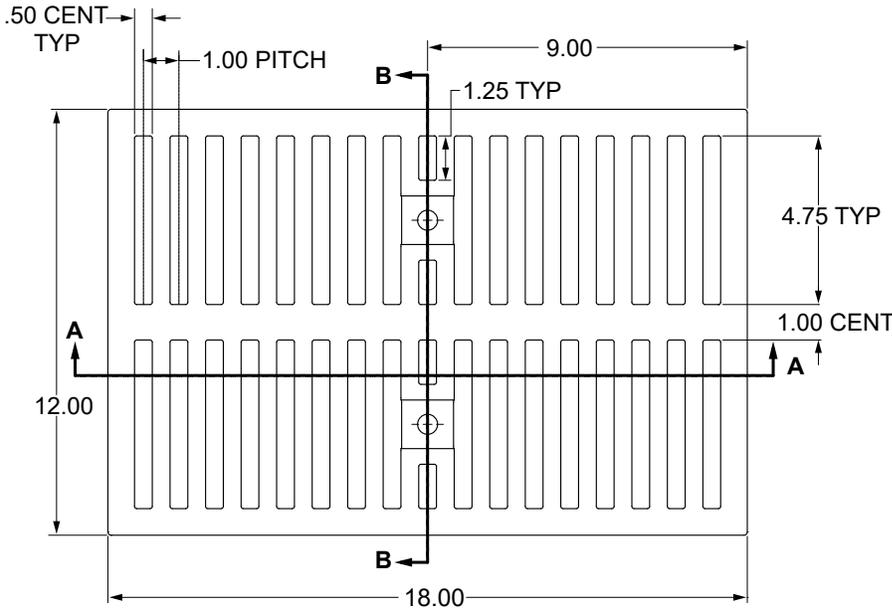

SECTION A-A



SECTION B-B

| TECHNICAL CHARACTERISTICS | |
|---------------------------|--------------|
| Weight | 43.4 lbs |
| Intake Area | 78.50 Sq In |
| Percent Opening | 36% |
| Material | Ductile Iron |

Heavy Duty, DIN 19580/EN 1433 Class E
 135,000 lbs - 2,788 psi, for commercial solid tire traffic patterns, forklifts and impacts from steel struts or metal wheels.

9872-M

| | | | | | | | | |
|---------------|------|-------------|------------------|---------|----|---------------|-------------------|---------------|
| FIGURE NUMBER | A | 8-30-23 | Removed Function | HS | CL | WEIGHT POUNDS | VOLUME CUBIC FEET | FIGURE NUMBER |
| REV. | DATE | DESCRIPTION | BY | CKD. BY | | | | 9872-M |