


TILE FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

SQUARE NICKEL BRONZE TOP WITH TILE RECESS

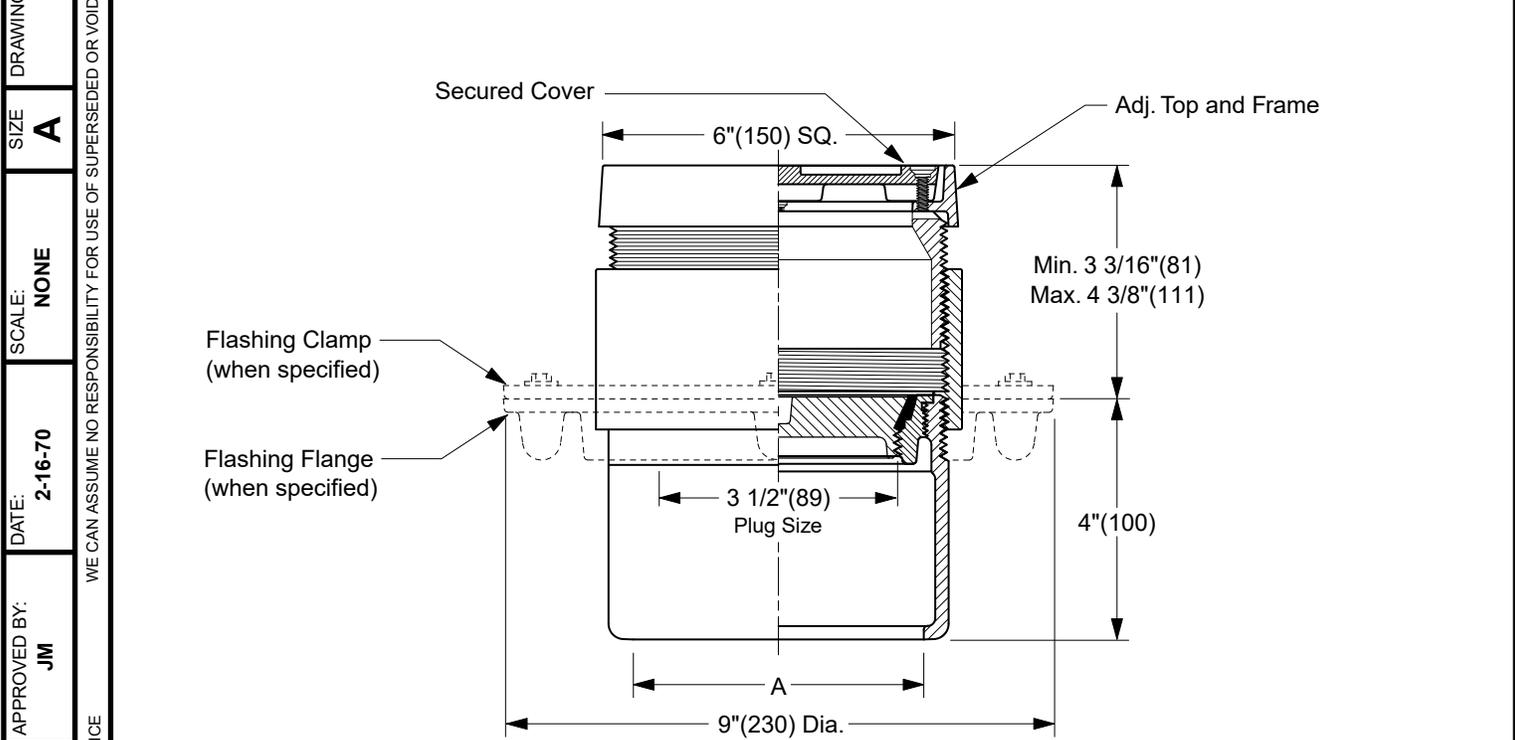

TWIS-TO-FLOOR® ADJUSTMENT
INSIDE CAULK OUTLET

"A" (Pipe Size) = 02(50), 03(75) or 04(100)

Conforms to ASME A112.36.2/CSA B79.2

- | | |
|--|--|
| <ul style="list-style-type: none"> <input type="checkbox"/> Fig. 4165C.....Gasket Seal - ABS Plug <input type="checkbox"/> Fig. 4166C.....Gasket Seal - Bronze Plug <input type="checkbox"/> Fig. 4168C.....Taper Thread - Bronze Plug <input type="checkbox"/> Fig. 4169C.....Taper Thread - ABS Plug | <p>(Twis-to-Floor® design shown with gasketed plug.)</p> <p>NOTE: Dimensions shown in parentheses are in millimeters.</p> |
|--|--|

- | | | |
|---|---|--|
| <p>REGULARLY FURNISHED:
Duco Cast Iron Cleanout with Square Adjustable Secured Nickel Bronze Top with 1/8"(3) Tile Recess. Closure Plug Type as Indicated By Figure Number Selected.</p> | <p>VARIATIONS:</p> <ul style="list-style-type: none"> <input type="checkbox"/> Flashing Flange -F <input type="checkbox"/> Flange with Flashing Clamp -F-C <input type="checkbox"/> Vandal Proof Top -U | <p>OPTIONAL MATERIALS:</p> <ul style="list-style-type: none"> <input type="checkbox"/> Galvanized Cast Iron -G <input type="checkbox"/> Polished Bronze Top -PB |
|---|---|--|

FIGURE NUMBER	L K J H	4-11-24 8-16-23 1-20-22 07/29/02	Added ASME Note Removed Function Removed "C.O." cast in" Corrected Clamp & Flange view	HS HS KK JJ	CL CL CL BS	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4165 SERIES
REV.	DATE	DESCRIPTION	BY	CKD. BY				