

F

SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



LOCATION

DRAWING NUMBER
s1909

SIZE
A

SCALE:
NONE

DATE:
5-7-08

APPROVED BY:
CL


CHECKED BY:
CL

DRAWN BY:
RN

1909

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

PLANTING AREA DRAINS

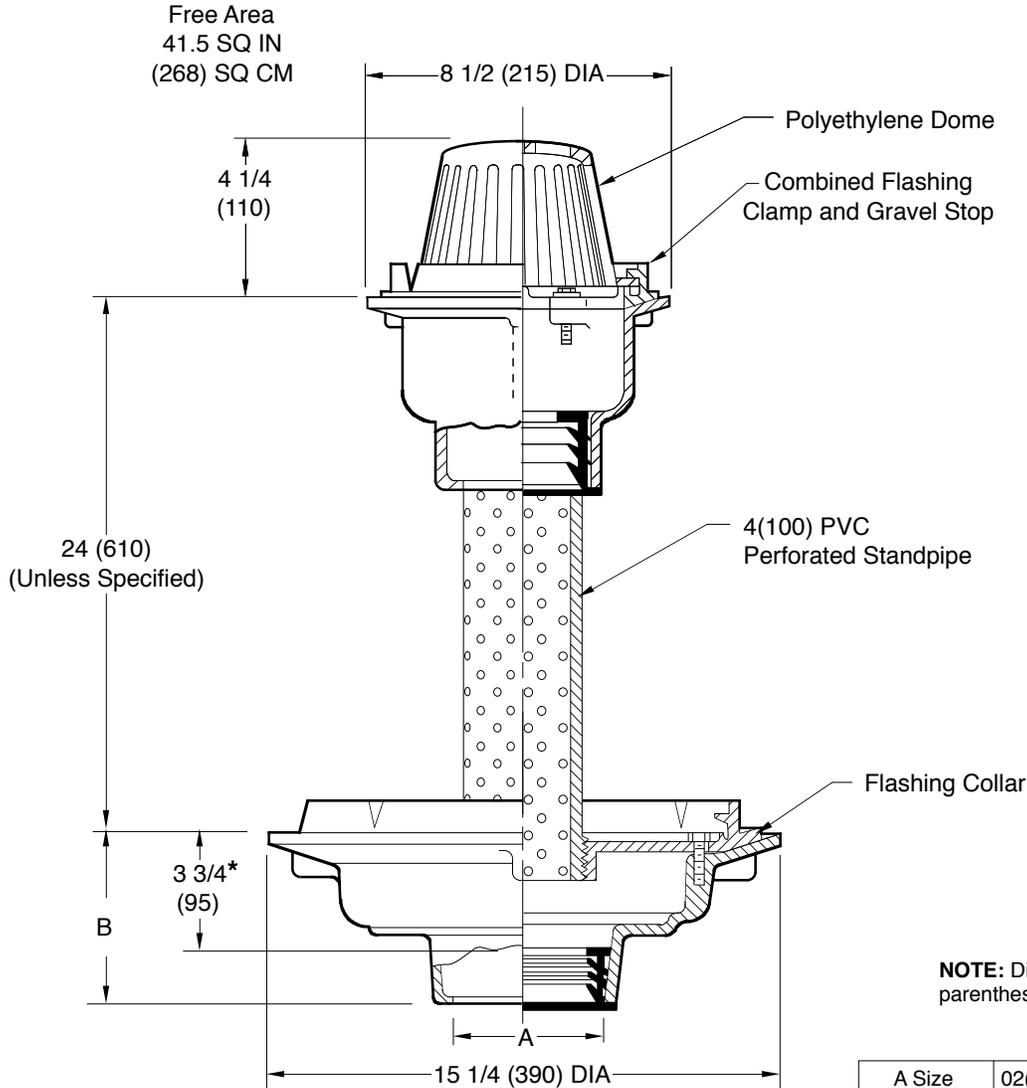

NOTE: Dimensions shown in parentheses are in millimeters.

*This Dimension to Internal Stop of Speedi-Set® Gasket.

Fig. 1909C CAULK OUTLET
 Fig. 1909Y NO-HUB OUTLET

A Size	02(50)	03(75)	04(100)
B	5(125) for Caulk, No-Hub and Speedi-Set® 3 3/4(95) for Threaded		

REGULARLY FURNISHED:

Duco Cast Iron Lower Body and Flashing Collar with 4(100) PVC Perforated Standpipe and Duco Cast Iron Upper Body with Combined Flashing Clamp and Gravel Stop with Polyethylene Dome.

VARIATIONS:

- L Speedi-Set® Service Weight
- LXH Speedi-Set® Extra Heavy
- Solid Standpipe -SP
- Standpipe Covered with Stainless Steel Mesh -SSM
- with Seepage Holes in Flashing Collar - WSH

OPTIONAL MATERIALS:

- Aluminum Dome -AD
- Cast Iron Dome -CID
- Galvanized Cast Iron Body & Collar -G
- Galvanized Cast Iron Dome -CIDG
- Rough Bronze Dome -RBD

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
F	3-8-23	Added ® to "Speedi-Set"	KK	CL			1909
E	6-22-21	Added Option Under Variations	KK	CL			
D	8-7-12	Rev. Optional Materials	TBW	CL			
C	04/19/10	Added 24 unless specified	JJ	TK			