



JAY R. SMITH MFG. CO.
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com




LOCATION

FLOOR DRAINS WITH HEAVY DUTY TRACTOR GRATE

15" (380) ROUND TOP - HEAVY DUTY DRAINS

Load Rating: Heavy Duty having a Safe Live (Static) Load between 5,000 lbs. (2,250 kg) and 7,499 lbs (3,375 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

Free Area
 45 SQ IN
 (290) SQ CM

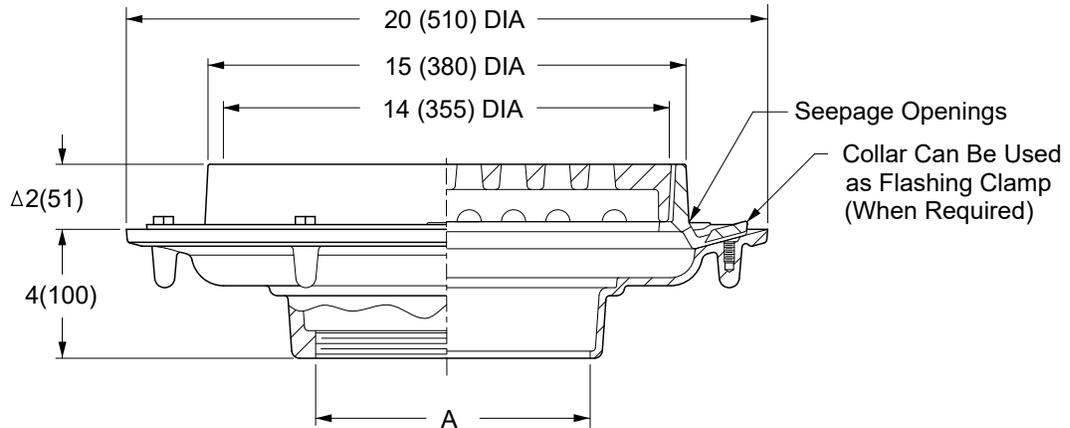

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125), 06(150) or 08(200)

- Fig. 2143C.....CAULK OUTLET
- Fig. 2143T.....THREADED OUTLET

Δ Add 1/4" (6) when bronze top is specified.

REGULARLY FURNISHED:
 Duco Cast Iron Body and Flashing Collar with Cast Iron ADA Tractor Grate.

VARIATIONS:

- Dome Grate -D
- Flat Bottom Strainer -FBS
- NO-HUB Adaptor (Specify Fig. 2646Y)
- Square Top -S
- Vandal Proof -U
- 4"(100) High Collar -HC4
- Quad Close Trap Seal (Specify Fig. 2692)
- Bucket -B

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB
- Nickel Bronze Heel Proof Top -NBHP
- Polished Bronze Heel Proof Top -PBHP
- Stainless Steel (Specify Fig. 9733)

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S2143

SIZE A

SCALE: NONE

DATE: 5-17-85

APPROVED BY: TD

CHECKED BY: TD

DRAWN BY: PJ

2143

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

L	2-24-25	Revised Optional Materials Added Load Rating Removed Function Revised Variations	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2143
K	7-22-19		MW	JM			
J	6-17-19		MW	JM			
H	6-12-15		TBW	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			