



## Secur-Care® - Ligature Resistant LR1671 Series

Recessed Ligature Resistant Drinking Fountain With Bottle Filler



LR1671-1-03

Fixture May Show Some Available Options

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### Recessed Ligature Resistant Drinking Fountain with Bottle Filler

**Ligature Resistant Fixture** is arranged to be installed on finished wall and serviced from an accessible pipe chase and is designed to minimize ligature points. Drinking fountain meets ADA/CBC Standing Person requirements only. Bottle Filler meets ADA/CBC Wheelchair Side Approach when installed correctly.

**Fixture** is fabricated from 14 gauge, type 304 stainless steel and is seamless welded construction with a #4 satin finish. Cabinet interior is sound-deadened with fire-resistant material. There are no accessible voids or crevices where contraband can be concealed.

**Sloped Deck** is provided with a Ligature Resistant Deck Mounted Drinking Bubbler.

**Ligature Resistant Bottle Filler** with 0.7 GPM flow control on the back wall.

**Bowl** comes standard with a Ligature Resistant Drain and a Close Elbow that accepts an 1-1/2" O.D. waste by others

**Valve** is an Air-Control pneumatically operated, Pushbutton using atmospheric air. Hemispherical Pushbuttons are Vandal-Resistant and requires less than 5 pounds to activate Valve. Valve is direct acting, non-metering type. Valve includes a 0.7 GPM flow control and can be remotely located up to 10 feet from the operating Pushbutton. Valve and Bubbler conform with the lead free requirements of NSF61, Section 9 and CHSC 116875.

**Regularly Furnished** items include a Ligature Resistant Drain, Close Elbow, Ligature Resistant Drinking Bubbler, Ligature Resistant Bottle Filler, Hemispherical Pushbutton and mounting hardware for walls up to 8" thick.

#### GUIDE SPECIFICATION

Provide and install Secur-Care® - Recessed Ligature Resistant Drinking Fountain (specify model number and options). Fixture shall be fabricated from 14 gauge, type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall have a #4 satin finish. Cabinet interior is sound-deadened with fire-resistant material. Fixture shall be furnished with necessary fasteners for proper installation. Valve and Bubbler conform with the lead free requirements of NSF61, Section 9 and CHSC 116875.



# Secur-Care® - Ligature Resistant LR1671:

## Ligature Resistant Drinking Fountain With Bottle Filler

**WALL THICKNESS AND TYPE (Must Specify)**  
 Thickness: \_\_\_\_\_ Type:  Concrete  Block  Steel

**VALVE OPTIONS**  
 -BRS Brass Body Valve

**MODEL AND OPTIONS SELECTION:**

**CABINET OPTIONS**  
 -TG 12 Gage Cabinet  
 -EG Enviro-Glaze, Specify Color: \_\_\_\_\_

**BASE MODEL NUMBER**  
 LR1671 Ligature Resistant Drinking Fountain




**LAVATORY WASTE ACCESSORIES**  
 -PT P-Trap Waste

**FIXTURE MOUNTING AND WASTE (Must Specify)**  
 -1 Off-Floor, Wall Outlet

**PRODUCT ACCESSORIES**  
 -MT Metal Template (Only 1 Required Per Project)

**VALVE SELECTION (Must Specify)**  
**Air-Trol (Pneumatic)**  
 -03 Single Temp, Non-Metering

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

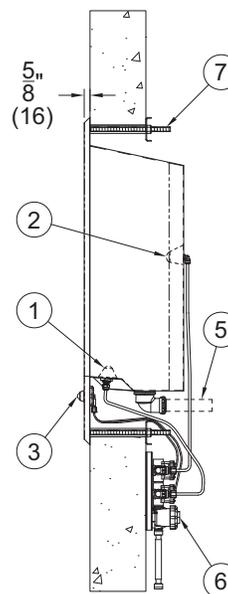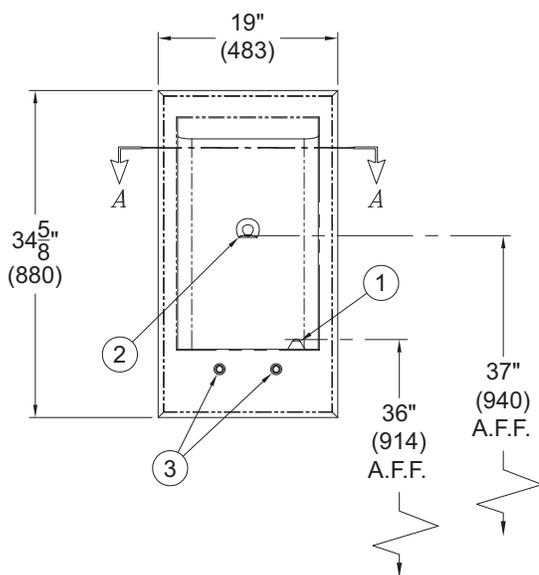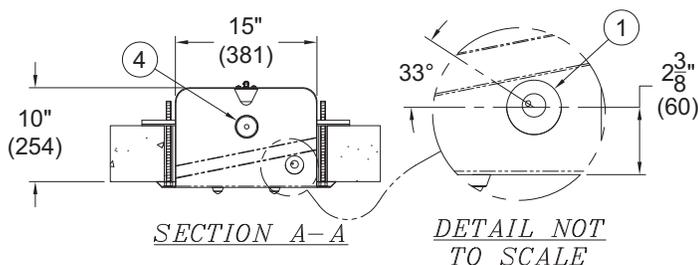

**NOTES:**

- |  |  |
|--|--|
| 1. LIGATURE RESISTANT DRINKING BUBBLER | 5. 1-1/2" O.D. LAVY WASTE BY OTHERS                |
| 2. LIGATURE RESISTANT BOTTLE FILLER    | 6. -03-MA2 MANIFOLD NON-METERING AIR-CONTROL VALVE |
| 3. HEMISPHERICAL PUSHBUTTONS           | 7. REAR MOUNTING HARDWARE, PROVIDED                |
| 4. LIGATURE RESISTANT DRAIN            |  |

**LR1671**

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

<p><b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2009 Acorn Engineering Company</p>	
<p><b>Selection Summary</b></p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p><b>Approved for Manufacturing</b></p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>