



Terrazzo-Ware® Shower Base - Integral Threshold Series, Corner Fixtures



SBC-36-2F

Fixture May Show Some Available Options

Please visit www.acorneng.com for most current specifications.

Shower Base With Integral Threshold, Corner Fixtures

Shower Base is an attractive, easy to maintain, spacious shower receptacle. It is designed for durability and ease of installation. **ACORN Terrazzo-Ware®** precast shower bases provide flexibility in configuration and size as required by the design of the building and the specific installation. Custom sizes and colors are also available.

Integral Thresholds on three sides provide an attractive entry into the shower. The 3" wide threshold allows installation of a shower door. The non-threshold sides have galvanized tiling flanges that extend 1½" above the 1¼" wide shoulder.

Construction is one-piece, precast terrazzo composed of marble chips cast in Portland cement to provide a compressive strength of at least 3,000 PSI seven days after casting. The shower base surface is provided with slip-resistant bathing surface and sealed to provide years of service. Shoulders are 4" high and sloped to provide drainage.

Standard Color provided is Palomino Tan (OCT01) and offered in optional colors (must specify).

Integral Drain is supplied with a removable, stainless steel grid strainer and provides for an inside caulk connection to a 2" pipe. The shower base has coved corners and is sloped to the drain outlet to provide positive drainage. A vandal resistant strainer is optionally available.

Compliance Standards: Terrazzo Shower Bases have Third Party Certification of conformance with CSA B45.8/IAPMO Z403 Terrazzo, Concrete and Natural Stone Plumbing Fixtures which includes specific provision for Slip Resistance (Section 4.4.4) and Referenced Standard ASTM F462 Standard Consumer Safety Specification for Slip-Resistant Bathing Facilities.

GUIDE SPECIFICATION

Provide and install an **ACORN Integral Threshold Corner Shower Base** (specify model number and options). Shower Base shall be made of precast terrazzo to produce a compressive strength of not less than 3,000 PSI seven days after casting. Base shall be provided with slip-resistant bathing surface and sealed. No air holes or pits shall be allowed on the finished surface. Base shall have coved corners and be sloped toward the drain outlet for positive drainage. Integral drain shall have a stainless steel strainer and provide for an inside caulk connection to a 2" pipe. The manufacturer will provide to the installer the necessary installation instructions.

Terrazzo-Ware®: Shower Base-Integral Threshold Series



BASE MODEL & TYPE

SIZE (must specify)

- SBC-32-2F** 32" Terrazzo Shower Base, Corner, Two Corner Sides Flanged
- SBC-34-2F** 34" Terrazzo Shower Base, Corner, Two Corner Sides Flanged
- SBC-36-2F** 36" Terrazzo Shower Base, Corner, Two Corner Sides Flanged
- SBC-38-2F** 38" Terrazzo Shower Base, Corner, Two Corner Sides Flanged
- SBC-40-2F** 40" Terrazzo Shower Base, Corner, Two Corner Sides Flanged

SUFFIX OPTIONS



- OCT Optional Colors
<https://www.acorneng.com/terrazzo-colors>
- VRS Vandal Resistant Strainer

ACCESSORIES

- KDG2 Rubber Drain Gasket for 2" Waste Pipe

Please visit www.acorneng.com for most current specifications.

MODEL NUMBER	TYPE	SIZES/DIMENSIONS		
		A – LENGTH	B	C
SBC-32-2F	CORNER	32" (815)	14" (355)	25-1/2" (650)
SBC-34-2F	CORNER	34" (865)	17" (430)	24" (610)
SBC-36-2F	CORNER	36" (915)	17" (430)	26-7/8" (685)
SBC-38-2F	CORNER	38" (965)	18" (450)	28-1/4" (720)
SBC-40-2F	CORNER	40" (1015)	20" (510)	28-1/4" (720)

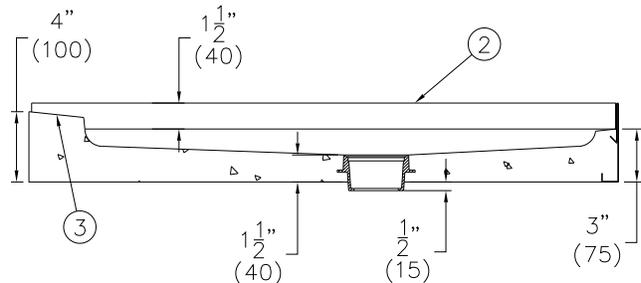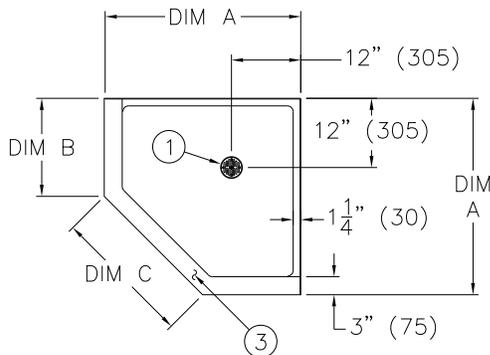

TERRAZZO INTEGRAL THRESHOLD SERIES CORNER SHOWER BASES

NOTE:

1. Integral drain with removable grid strainer. Drain provides an inside connection to 2" pipe.
2. Tiling Flange.
3. Shower base threshold.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

<p>Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2002 Acorn Engineering Company</p>	
<p style="text-align: center;">Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>