




Option SW000-F31

Battery Operated Sensor Faucet

Faucet to be constructed of polished chrome plated brass. Faucet to be single hole deck mount with rigid or swivel gooseneck spout. Thermostatic mixing valve standard with integral cleanable filter. Sensor assembly designed to include 6V DC bi-stable solenoid powered by four (4) 1.5V AA batteries. Valve components, (battery compartment, sensor connector, and control module (PCB)) to be housed in sealed, non-metallic box for easy access and quick installation. Faucet to be furnished with (2) 3/8" braided stainless steel supply lines, 0.5 gpm vandal resistant PCA spray aerator and all necessary faucet mounting hardware.



Dimensions shown in inches (mm) are for reference only and subject to change.

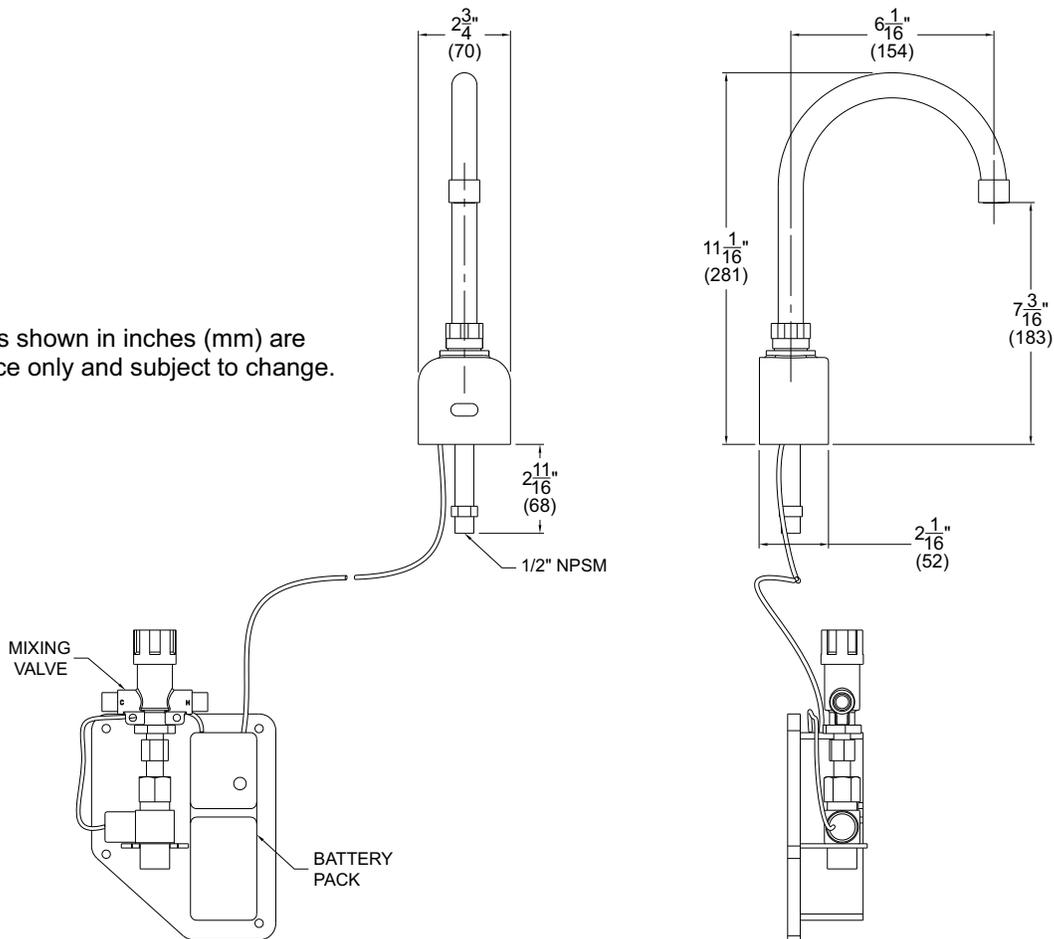

Please visit www.acorneng.com for most current specifications.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

