

Shower Series

MODEL M-PCS14 ONE STATION POOL AND BEACH SHOWER

STANDARD FEATURES

- Pushbutton requiring less than 5 pounds for activation
- Adjustable timing, from 5 to 60 seconds
- Chrome plated brass shower head with 1.6 gpm flow control and adjustable spray pattern
- Vandal resistant fasteners
- Shut off valve for easy servicing
- Heavy duty, 14 gage, 304 stainless steel construction with corrosion and scratch resistant satin finish
- 1/4" Thick, Anchor Plate with O-ring x 3/4" NPT inlet connection provided

SUGGESTED SPECIFICATIONS

Column shower shall be Murdock model M-PCS14, single station shower. Unit is to be pre-piped and hydrostatically tested.

Valve shall have internally mounted metering valve, pushbutton operated and requiring less than 5 pounds of force to activate. Timing shall be adjusted from 5 to 60 seconds.

Shower head shall be chrome plated brass with 1.6 gpm flow restrictor and include an adjustable spray pattern from a coarse stream to a fine mist.

Unit shall be constructed of heavy duty 14 gage type 304 stainless steel polished to a satin finish with vandal resistant fasteners and shall include a 1/4" thick stainless steel Anchor Plate, providing secure mounting for shower.

MODEL:

(Must Specify)

- ☐ M-PCS14 Satin Stainless Finish (Shown)
- ☐ M-PCS15 Green Powder-Coated
- ☐ M-PCS16 Red Powder-Coated
- ☐ M-PCS17 Blue Powder-Coated

Custom color finishes available upon request

Complies with the following standards:




Federal
Public Law
111-380
(No Lead)



Recyclable
Product

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Please visit www.murdockmfg.com
for most current specifications.

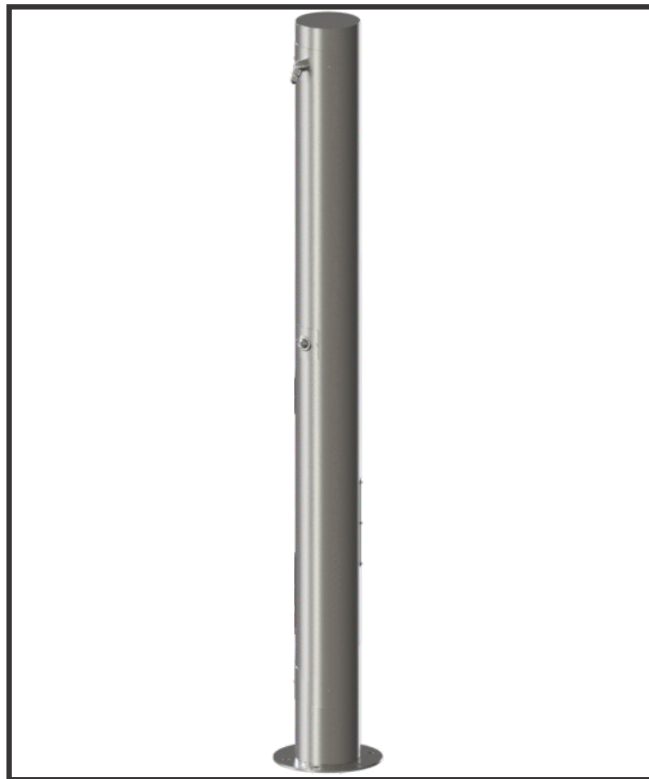

☐ **Standard Model:** M-PCS14

OPTIONS

(additional costs may be incurred)

- ☐ - FRU1 Underground freeze-resistant valve for one pushbutton (-IAP Option Required) ²
- ☐ - FRU2 Underground freeze-resistant valve for two pushbuttons (-IAP Option Required) ²
- ☐ - FRU3 Underground freeze-resistant valve for three pushbuttons (-IAP Option Required) ²
- ☐ - FS Foot Shower at one station ¹
- ☐ - GB Grab bar - Two vertical grab bars and second lower shower head at 48" ¹
- ☐ - IAP In-ground anchor plate (Required with -FRU Option, replaces standard Anchor Plate) ²
- ☐ - HB1 Hose Bibb, exposed compression with Hose outlet thread VB ¹³
- ☐ - HB2 Hose Bibb, exposed Loose Key with Hose outlet thread VB ¹³
- ☐ - HB3 Hose Bibb, Loose Key, Vandal Resistant with Hose outlet thread VB ¹³
- ☐ - LOGO Customer specified logo ¹

Options Notes:


¹ See separate option sheet.

² IAP required for FRU Freeze Resistant Valve options.

³ The Hose Bibb option is not available or included with the FRU freeze-resistant components.

Shower Series

MODEL M-PCS14 ONE STATION POOL AND BEACH SHOWER

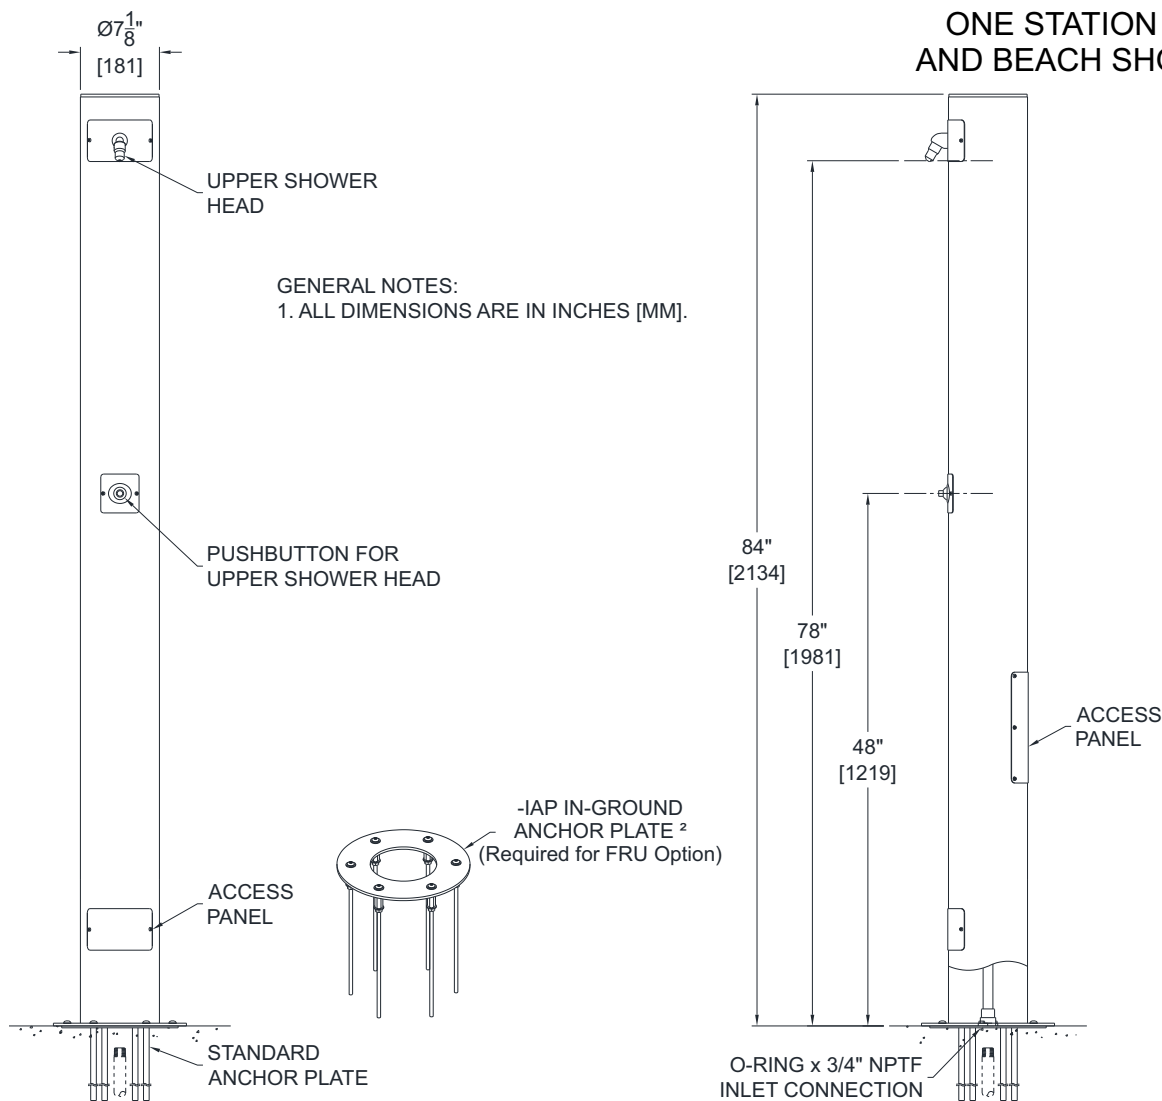

SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock® Mfg., Member of Morris Group International®, Please visit www.murdockmfg.com for most current specifications.