

# FLUSH VALVE BOXES

## SQUARE FLUSH VALVE BOX

The face-of-wall box is for tile, masonry, or dry wall construction. The open back box is installed in the wall by means of anchor or nail holes provided.

The flush-with-wall box is for plaster or wet wall construction and is installed prior to wall finish. The adjustable anchoring lugs provide a means of securely anchoring the box, so that the face of the cover will be flush with the finished wall.

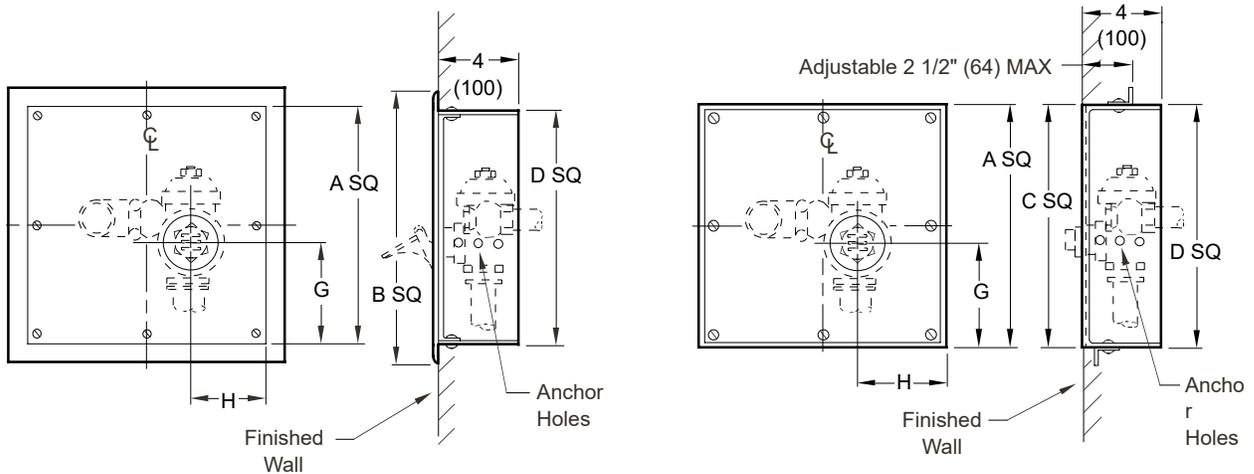


Fig. 4740 FACE-OF-WALL BOX

Fig. 4745 FLUSH-WITH-WALL BOX

A Opening	B SQ	C SQ	D SQ
10 (255) x 10 (255)	11 3/4 (300)	10 1/2 (265)	10 (255)
12 (305) x 12 (305)	13 3/4 (350)	12 1/2 (320)	12 (305)
15 (380) x 15 (380)	16 3/4 (425)	15 1/2 (395)	15 (380)

NOTE: G and H dimensions depend on Flush Valve being used. Always specify Manufacturers name and valve model number.

NOTE: Dimensions shown in parentheses are in millimeters.

**REGULARLY FURNISHED:**

Chrome Plated Bronze Square Frame and Cover Secured with Screws, Aluminum Frame and Anchors.

**VARIATIONS:**

- 1 1/2" (38) DIA Handle Hole Located to Accommodate Flush Valve Being Used (Specify Mfrs. Name and Model Number)
- Handle Hole any Size or Location (Specify)
- Vandal Proof Screws -U

**OPTIONAL MATERIALS:**

- Nickel Bronze Frame and Stainless Steel Cover -NB
- Polished Bronze Frame and Cover -PB

<b>4740, 4745</b>	DRAWN BY: <b>RK</b>	CHECKED BY: <b>BH</b>	APPROVED BY: <b>JM</b>	DATE: <b>2-16-70</b>	SCALE: <b>NONE</b>	SIZE <b>A</b>	DRAWING NUMBER <b>S4740</b>
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE							
FIGURE NUMBER	REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET
<b>4740, 4745</b>							<b>FIGURE NUMBER</b> <b>4740, 4745</b>