


FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR"® ADJUSTABLE TOPS FOR UNFINISHED AREAS

ROUND EXTRA HEAVY DUTY CAST IRON TOP WITH PUSH-ON SPEEDI-SET® OUTLET

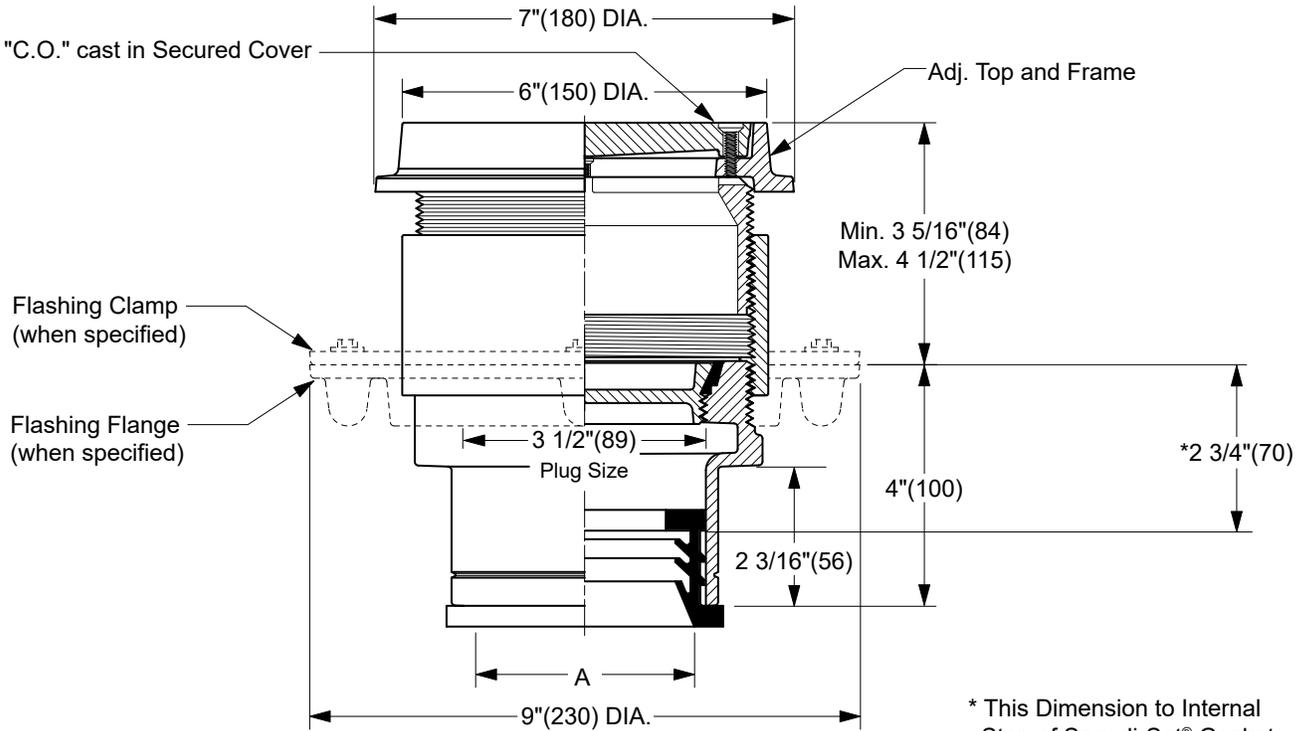

TWIS-TO-FLOOR® ADJUSTMENT
SPEEDI-SET® OUTLET ▲

"A" (Pipe Size) = 02(50), 03(75) or 04(100)

Conforms to ASME A112.36.2/CSA B79.2

- | | | | | | | | | | |
|---|---|---------------------------------------|--------------------------|--|--------------------------|---|--------------------------|--|--|
| <table border="0"> <tr><td><input type="checkbox"/></td><td>Fig. 4231L.....Gasket Seal - ABS Plug</td></tr> <tr><td><input type="checkbox"/></td><td>Fig. 4232L.....Gasket Seal - Bronze Plug</td></tr> <tr><td><input type="checkbox"/></td><td>Fig. 4233L.....Taper Thread - Bronze Plug</td></tr> <tr><td><input type="checkbox"/></td><td>Fig. 4234L.....Taper Thread - ABS Plug</td></tr> </table> | <input type="checkbox"/> | Fig. 4231L.....Gasket Seal - ABS Plug | <input type="checkbox"/> | Fig. 4232L.....Gasket Seal - Bronze Plug | <input type="checkbox"/> | Fig. 4233L.....Taper Thread - Bronze Plug | <input type="checkbox"/> | Fig. 4234L.....Taper Thread - ABS Plug | <p>(Twis-to-Floor® design shown with gasketed plug.)</p> <p>NOTE: Dimensions shown in parentheses are in millimeters.</p> |
| <input type="checkbox"/> | Fig. 4231L.....Gasket Seal - ABS Plug | | | | | | | | |
| <input type="checkbox"/> | Fig. 4232L.....Gasket Seal - Bronze Plug | | | | | | | | |
| <input type="checkbox"/> | Fig. 4233L.....Taper Thread - Bronze Plug | | | | | | | | |
| <input type="checkbox"/> | Fig. 4234L.....Taper Thread - ABS Plug | | | | | | | | |

REGULARLY FURNISHED:
 Duco Cast Iron Cleanout with Round Adjustable Scoriated Secured Cast Iron Top. Closure Plug Type as Indicated By Figure Number Selected.

- VARIATIONS:**
- | | |
|--------------------------|---------------------------------|
| <input type="checkbox"/> | Flashing Flange -F |
| <input type="checkbox"/> | Flange with Flashing Clamp -F-C |
| <input type="checkbox"/> | Vandal Proof Top -U |
- ▲ Available in Extra Heavy, Service Weight or NO-HUB.

- OPTIONAL MATERIALS:**
- | | |
|--------------------------|-------------------------|
| <input type="checkbox"/> | Galvanized Cast Iron -G |
| <input type="checkbox"/> | Ductile Iron Cover -M |

DRAWING NUMBER **S4231**
 SIZE **A**
 SCALE: **NONE**
 DATE: **2-16-70**
 APPROVED BY: **JM**
 CHECKED BY: **BH**
 DRAWN BY: **RK**
4231 SERIES
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4231 SERIES

F
 DRAWING NUMBER S4231BS
 SIZE A
 SCALE: NONE
 DATE: 5-5-06
 APPROVED BY: CEL
 CHECKED BY: CL
 DRAWN BY: RN
 4233
 FIGURE NUMBER

SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com

CUSTOMER DRIVEN SINCE 1926


PDI
 INSTITUTE

ASPE
 MEMBER OF:

LOCATION

FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS FOR UNFINISHED AREAS

ROUND EXTRA HEAVY DUTY CAST IRON TOP WITH PUSH-ON SPEEDI-SET® OUTLET

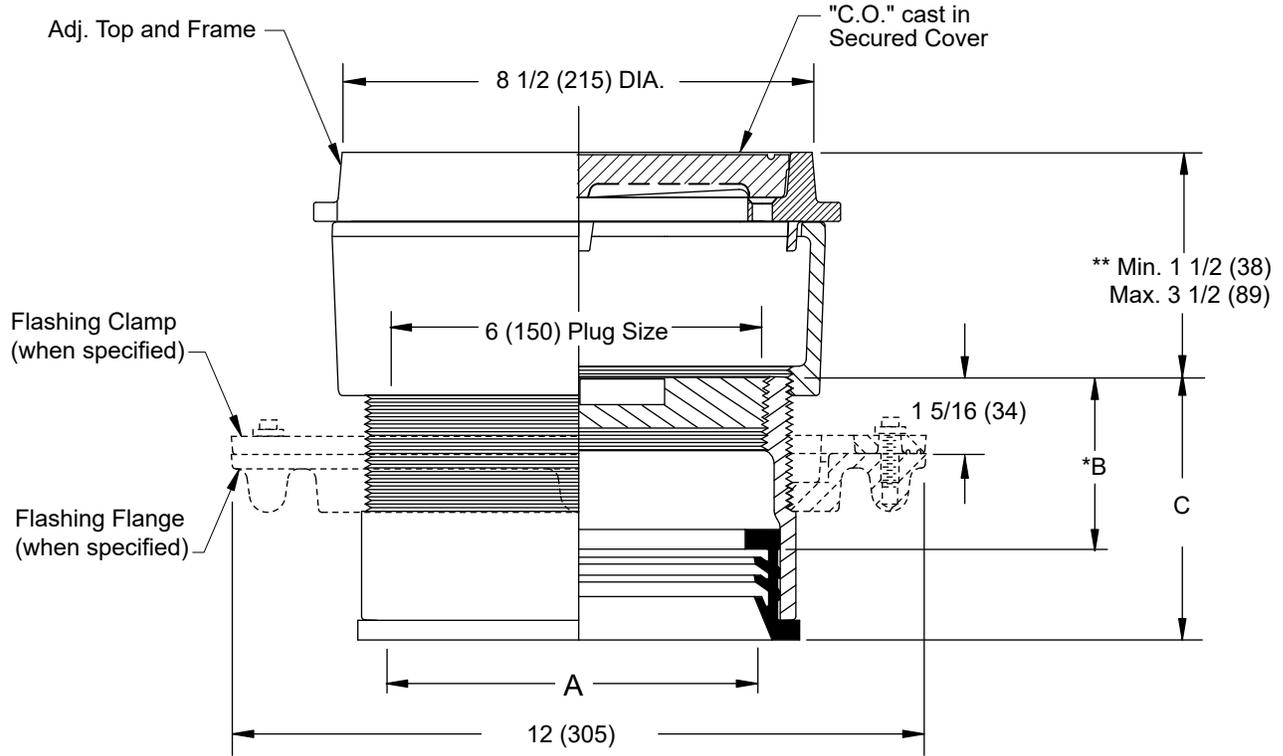

▲ SPEEDI-SET® OUTLET ▲

"A" (Pipe Size) = 06(150) & 08(200)

Conforms to ASME A112.36.2/CSA B79.2

A SIZE	B	C
06(150)	*3(76)	4 9/16(117)
08(200)	*3 1/4(83)	4 13/16(121)

**"TWIS-TO-FLOOR®" ADJUSTMENT
SPEEDI-SET® OUTLET ▲**

Fig. 4233L.....Taper Thread - Bronze Plug

▲ SPEEDI-SET® OUTLET

- L Service Weight - For Service Weight and No Hub Cast Iron Pipe (Available for all pipe sizes)
 - LXH Extra Heavy - For Extra Heavy Cast Iron Pipe (Available for all pipe sizes)
 - LXH Extra Heavy - For PVC Pipe (Available for 2", 3", 4", and 8" pipe sizes only)
 - LPVC Plastic Pipe - For PVC or ABS pipe (Available for 6" pipe size only)
- * This Dimension to Internal Stop of Speedi-Set® Gasket.
 ** When Flange-F is specified Min. 1 1/2 (38) becomes 2 (51)

REGULARLY FURNISHED:
 Duco Cast Iron Cleanout with Taper Thread Bronze Plug and Round Adjustable Scoriated Secured Cast Iron Top.

- VARIATIONS:**
- Flashing Flange -F
 - Flange with Flashing Clamp -F-C
 - Vandal Proof Top -U

- OPTIONAL MATERIALS:**
- Galvanized Cast Iron -G
 - Ductile Iron Cover-M (Extra Heavy Duty)

NOTE: Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
F	11-25-24	Revised Description	HS	CL			4233
E	4-11-24	Added ASME Note	HS	CL			
D	8-17-23	Removed Function	HS	CL			
C	3-14-23	Added ® to Speedi-Set	KK	CL			