

# NON-FREEZE POST HYDRANT

DRAWING NUMBER  
**S5909**

SIZE  
**A**

SCALE:  
**NONE**

DATE:  
**9-25-90**

APPROVED BY:  
**CR**

CHECKED BY:  
**BS**


DRAWN BY:  
**EMB**

**5909**


FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA


DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

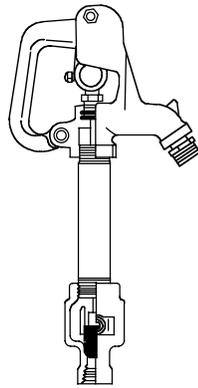

**FIG. 5909**

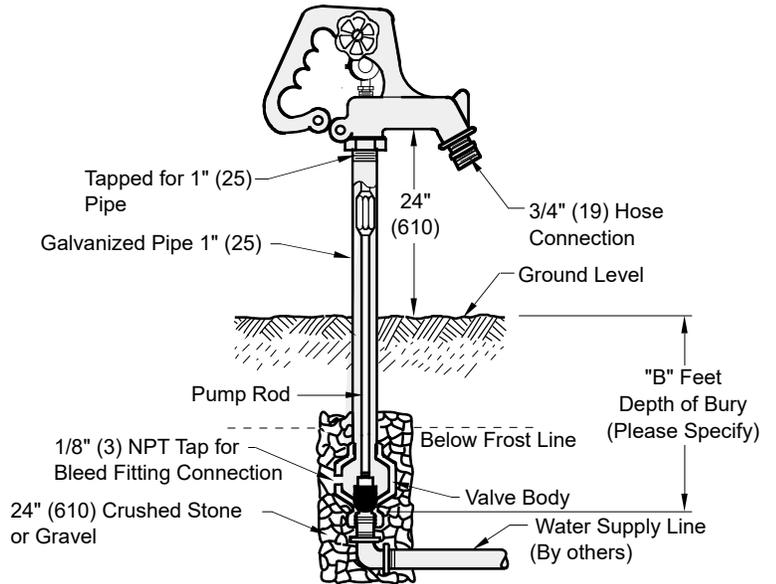

B (Depth of Bury) = 02(610), 03(915), 04(1220), 05(1525) or 06(1830) Feet

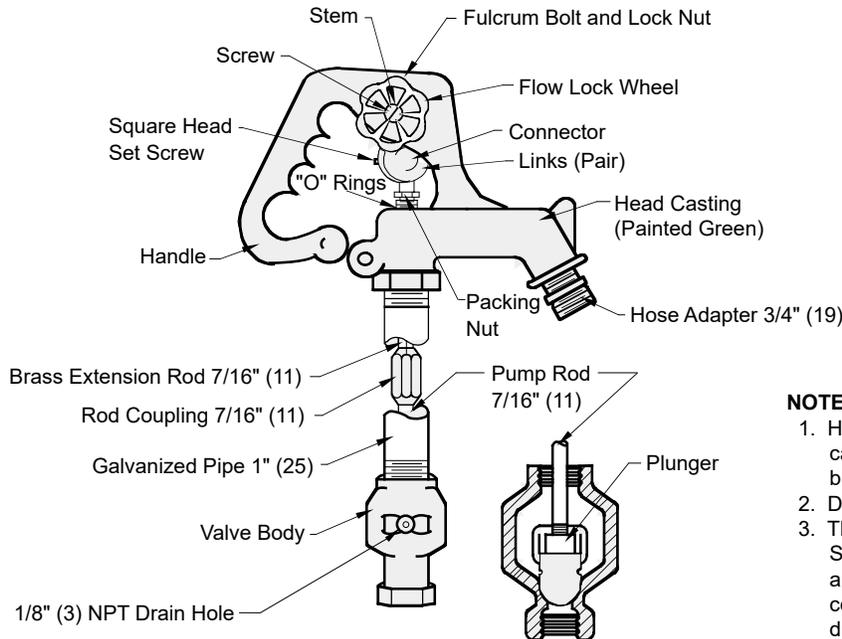

**REGULARLY FURNISHED:**  
 Non-Freeze Post Hydrant with Galvanized Casing and Adjustable Flow Wheel Lock Handle.

**VARIATIONS:**

- Vacuum Breaker -H (Note 1&4)
- 1"(25) Hose Connection -HC1
- 1"(25) Female Inlet Connection -MF-1

- NOTE:**
1. Hose must be removed to allow proper draining of the casing. Smith is not responsible for any casings that burst or related incidents if the hose is not removed.
  2. Dimensions shown in parentheses are in millimeters.
  3. The AB100, AB1953, California Lead Law, and NSF/ANSI Standard 61- Drinking Water System Components are not applicable to Jay R. Smith hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
  4. Vacuum breaker not available with 1"(25) Hose Connection Adaptor -HC1.
  5. **FOR IRRIGATION PURPOSES ONLY.**
  6. Temperature Range: 33.0°F to 140.0°F (0.6°C to 60.0°C).

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							<b>5909</b>