

E

SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



LOCATION

DRAWING NUMBER
SP500L-CAN Series

SIZE
A

SCALE:
NONE

DATE:
1-26-07

APPROVED BY:
TED

CHECKED BY:
TED

DRAWN BY:
RN

P500L-CAN SERIES

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

GREASE INTERCEPTOR

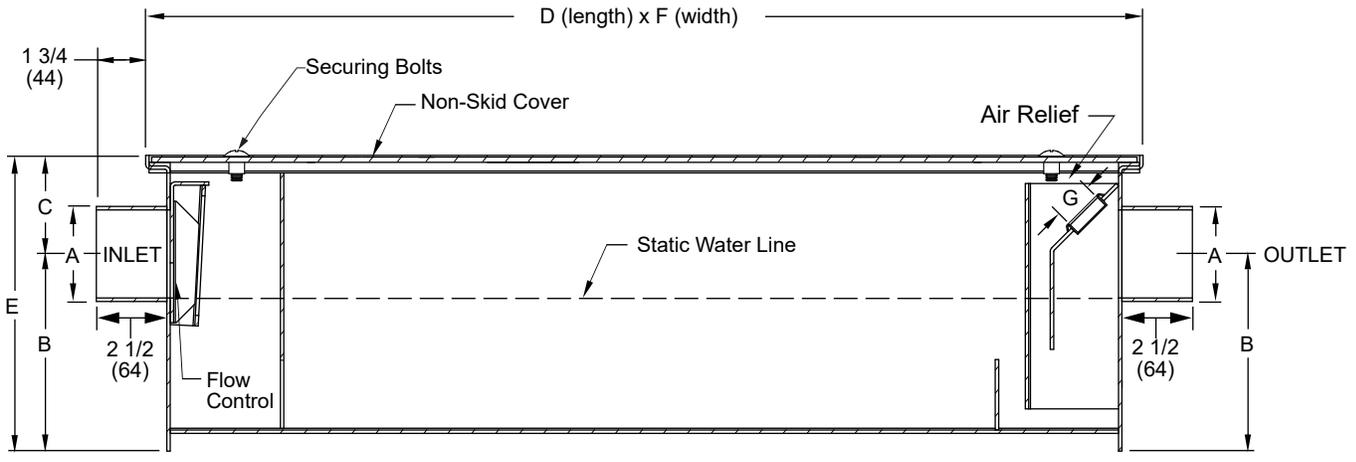


FIG. NO.	GPM FLOW RATE (L/M)	GREASE CAP LBS (KG)	PIPE SIZE A	B	C	D	E	BODY WIDTH F	PLUG SIZE G
P500-L20	20(75)	40(18)	03(75)	7(180)	3 3/4(95)	39 1/2(1010)	10 1/2(265)	20 3/4(527)	1 1/2(38)
P500-L35	35(132)	70(32)	03(75)	7(180)	4 3/4(120)	52 1/4(1327)	11 3/4(300)	26 3/4(680)	1 1/2(38)
P500-L50	50(189)	100(45)	03(75)	10(254)	5 15/16(151)	50 1/4(1276)	15 15/16(404)	26 3/4(680)	1 1/2(38)

REGULARLY FURNISHED:
 All Steel Duco Coated Inside and Outside with Steel Diamond Plate Cover, and Internal Flow Control.

NOTE: Dimensions shown in parentheses are in millimeters unless otherwise noted.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
	10-12-23 8-6-15 2-28-14 10-6-09	Removed Function Revised Table Revised Drawing and Table Revised Drawing & Table	HS TBW TBW RN	CL CL SJM CL			P500L-CAN SERIES