

K

SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



LOCATION

ROOF DRAINS

SPECIAL ROOF APPLICATIONS

DRAWING NUMBER
S1038

SIZE
A

SCALE:
NONE

DATE:
10-8-87


APPROVED BY:
CR

CHECKED BY:
BS

DRAWN BY:
EMB

1038

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

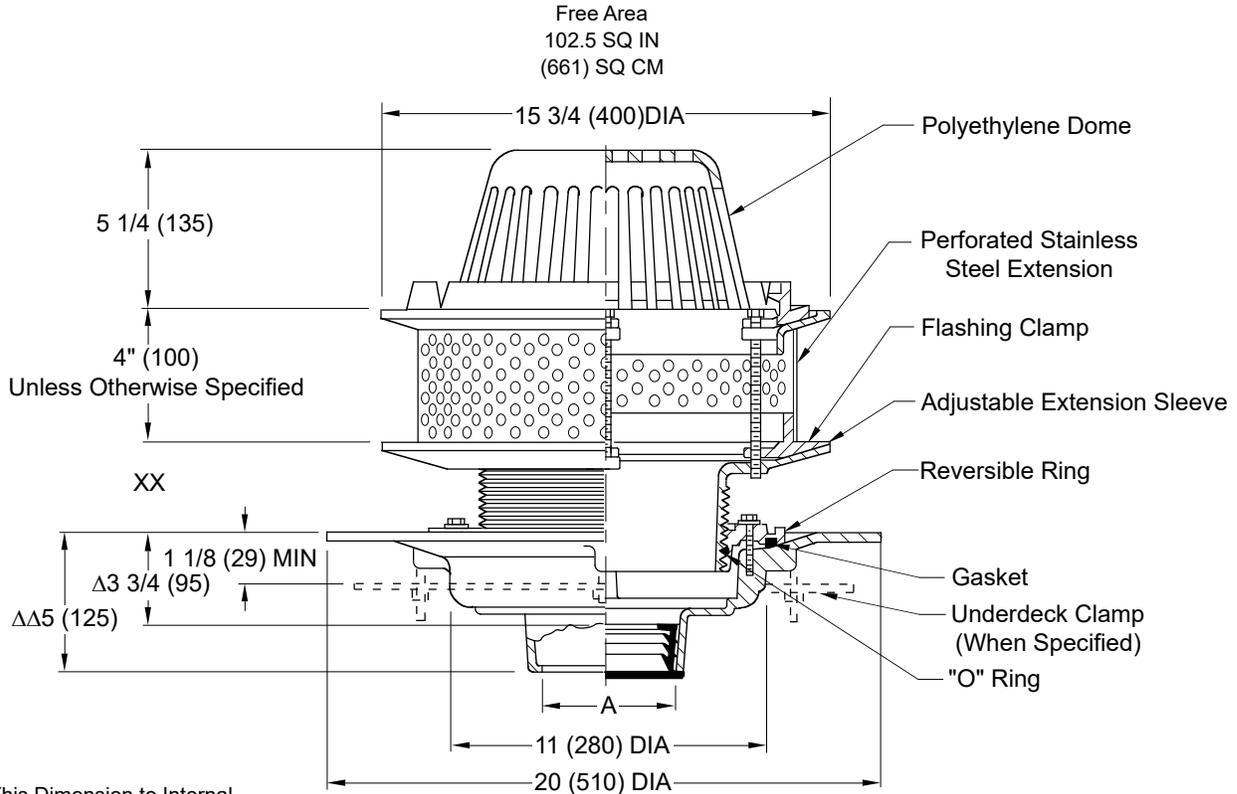

Free Area
102.5 SQ IN
(661) SQ CM

△ This Dimension to Internal Stop of Speedi-Set® Gasket.
 ΔΔ Same for caulk, NO-HUB and Speedi-Set®, 3 3/4 (95) for Threaded.
NOTE: Dimensions shown in parentheses are in millimeters.
NOTE: Recommended deck opening 14 3/4" (375).

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

Fig. 1038C CAULK OUTLET
 Fig. 1038Y..... NO-HUB OUTLET

XX	MIN	MAX
Low Position	1 1/4 (32)	2 1/2 (64)
High Position	2 1/4 (57)	4 (100)

REGULARLY FURNISHED:

Duco Cast Iron Body with Adjustable Extension Sleeve, Perforated Stainless Steel Extension, Combined Flashing Clamp and Gravel Stop, and Polyethylene Dome

VARIATIONS:

- Expansion Joint (Specify Fig. 1710) (Fig. 1010 only)
- Higher Gravel Stop (Specify Height) -HGS
- "L" Shaped Underdeck Clamp -CL
- "L" Speedi-Set® Service Weight
02(50), 03(75), and 04"(100) sizes only (Fig. 1010 only)
- LXH Speedi-Set® Extra Heavy
02(50), 03(75), and 04"(100) sizes only (Fig. 1010 only)
- Sump Receiver -R
- Underdeck Clamp -C
- Vandal Proof Dome -U
- T Threaded Outlet

OPTIONAL MATERIALS:

- ▲ Aluminum Dome -AD
- ▲ Cast Iron Dome -CID
- ▲ Galvanized Cast Iron -G
- ▲ Rough Bronze Dome -RBD

▲ **Optional domes' free area are as follows:**
 Aluminum 98 (632)
 Cast Iron 80 (516)
 Bronze 95 (613)

K	9-27-23	Removed Function	HS	CL
J	3-8-23	Added © to "Speedi-Set"	KK	CL
H	7-30-19	Removed NOTE	MW	CL
G	4-14-16	Revised Text	TBW	CL

DESCRIPTION

BY CKD. BY

WEIGHT POUNDS VOLUME CUBIC FEET

FIGURE NUMBER

1038