


# ROOF-CEPTOR® INDIRECT WASTE DRAINS

## 12 1/2"(320) TOP - MEDIUM DEPTH RECEPTORS

Conforms to ASME A112.6.7/CSA B79.7

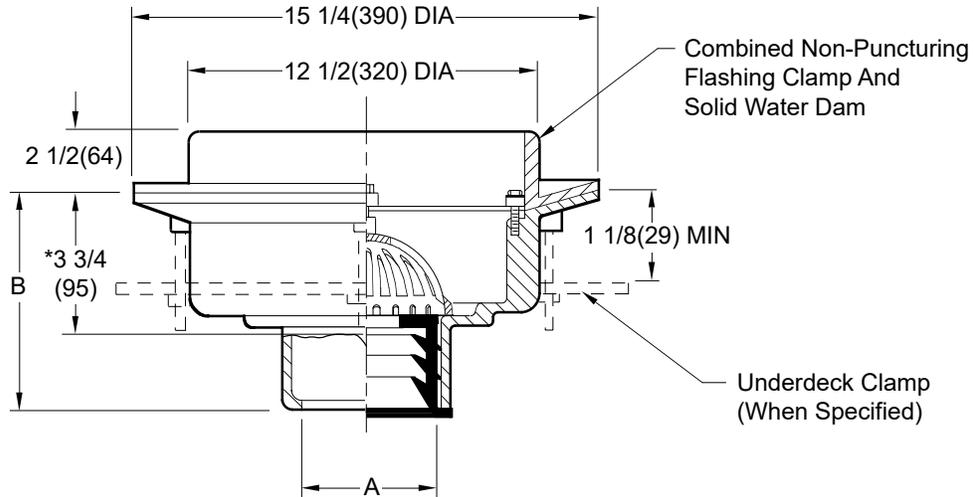

- Fig. 3980C . . . CAULK OUTLET
- Fig. 3980Y . . . NO-HUB OUTLET
- Fig. 3980T . . . THREADED OUTLET

\*This Dimension to Internal Stop of Speedi-Set® Gasket

recommended deck openings:

with suffix -R	17"(430) Dia
less suffix -R	14"(355) Dia

A SIZE	02 (50)	03 (75)	04 (100)	05 (125)	06 (150)
B	5(125) for Caulk, NO-HUB and Speedi-Set®. 3 3/4(95) for Threaded				

**REGULARLY FURNISHED:**  
 Duco Cast Iron Receptor with Solid Water Dam and Cast Iron Dome Bottom Strainer

**VARIATIONS:**

- Extension -E
- L Speedi-Set® Service Weight  
02(50), 03(75) & 04"(100) sizes only
- LXH Speedi-Set® Extra Heavy  
02(50), 03(75) & 04"(100) sizes only
- Roof Sump Receiver -R
- Underdeck Clamp -UDC
- Flat Grate -FG
- Vandal Proof -U
- Roof Deck Plate - RDP

**OPTIONAL MATERIALS:**

- All Galvanized -G

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER  
**S3980**

SIZE  
**A**

SCALE:  
**NONE**

DATE:  
**9-19-85**

APPROVED BY:  
**SJM**

CHECKED BY:  
**JD**

DRAWN BY:  
**PJ**

**3980**

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
	5-8-25	Added RDP Option	TB	CL			<b>3980</b>
	4-19-24	Added ASME Note	HS	BW			
	7-27-23	Removed Function	HS	CL			
	3-14-23	Added ® to Speedi-Set	KK	CL			