


LARGE GENERAL PURPOSE ROOF DRAIN

LOW PROFILE DOME

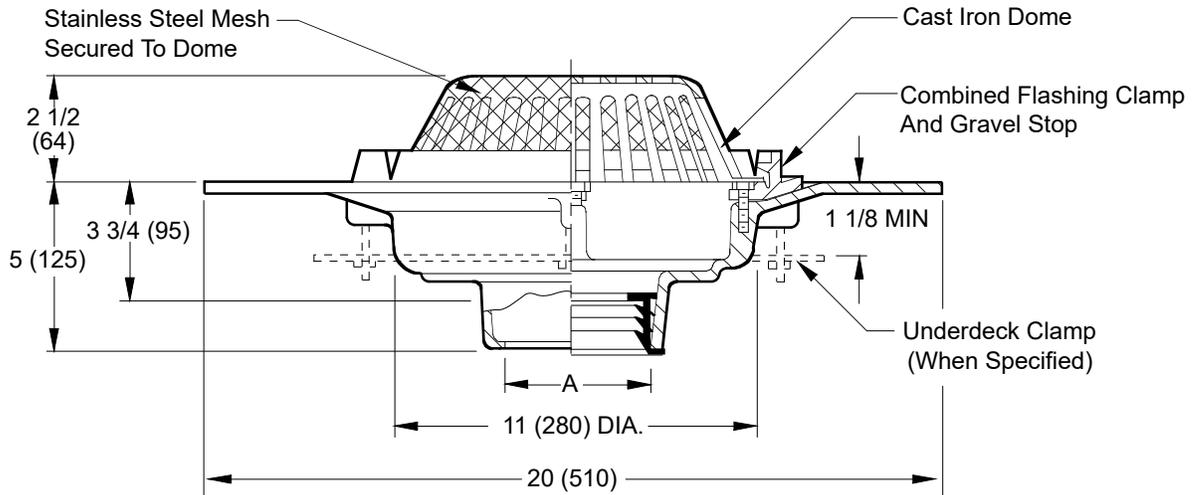

A (Pipe Size) = 02(50), 03(75), 04(100) 05(125) or 06(150)

- Fig. DX1010C-LPDM . . . CAULK OUTLET
- Fig. DX1010Y-LPDM . . . NO-HUB OUTLET

REGULARLY FURNISHED:

Duco Cast Iron Body with Combined Flashing Clamp and Gravel Stop with Cast Iron Low Profile Dome with Stainless Steel Mesh over Dome.

VARIATIONS:

- Expansion Joint (Specify Fig. 1710)
- Extension (Specify Height) -E
- "L" Shaped Underdeck Clamp -CL
- L Speedi-Set® Service Weight
02(50), 03(75), & 04"(100) sizes only
- LXH Speedi-Set® Extra Heavy
02(50), 03(75), & 04"(100) sizes only
- NO-HUB Adaptor (Fig. 1020 only)
- Underdeck Clamp -C
- Secondary Flashing Clamp -C2
- Vandal Proof Dome -UT
- Threaded Outlet

OPTIONAL MATERIALS:

- Galvanized Cast Iron -G

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER
SDX1010-LPDM

SIZE
A

SCALE:
NONE

DATE:
4-8-08

APPROVED BY:
BW

CHECKED BY:
BW

DRAWN BY:
TBW

FIGURE NUMBER
DX1010-LPDM

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

D	9-29-23	Removed Function	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER DX1010-LPDM
C	3-9-23	Added © to "Speedi-Set"	KK	CL			
B	7-30-19	Removed NOTE	MW	CL			
A	12-15-15	Added Flow Rate Note	TBW	BW			
REV.	DATE	DESCRIPTION	BY	CKD. BY			