


D
 DRAWING NUMBER S0230Y-M54NW
 SIZE A
 SCALE: NONE
 DATE: 6-14-24
 APPROVED BY: DP
 CHECKED BY: CL
 DRAWN BY: JJT
0230Y (-M54NW)

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

ADJUSTABLE FIXTURE SUPPORTS FOR SIPHON JET WATER CLOSETS

NARROW WALL NO-HUB VERTICAL FITTING

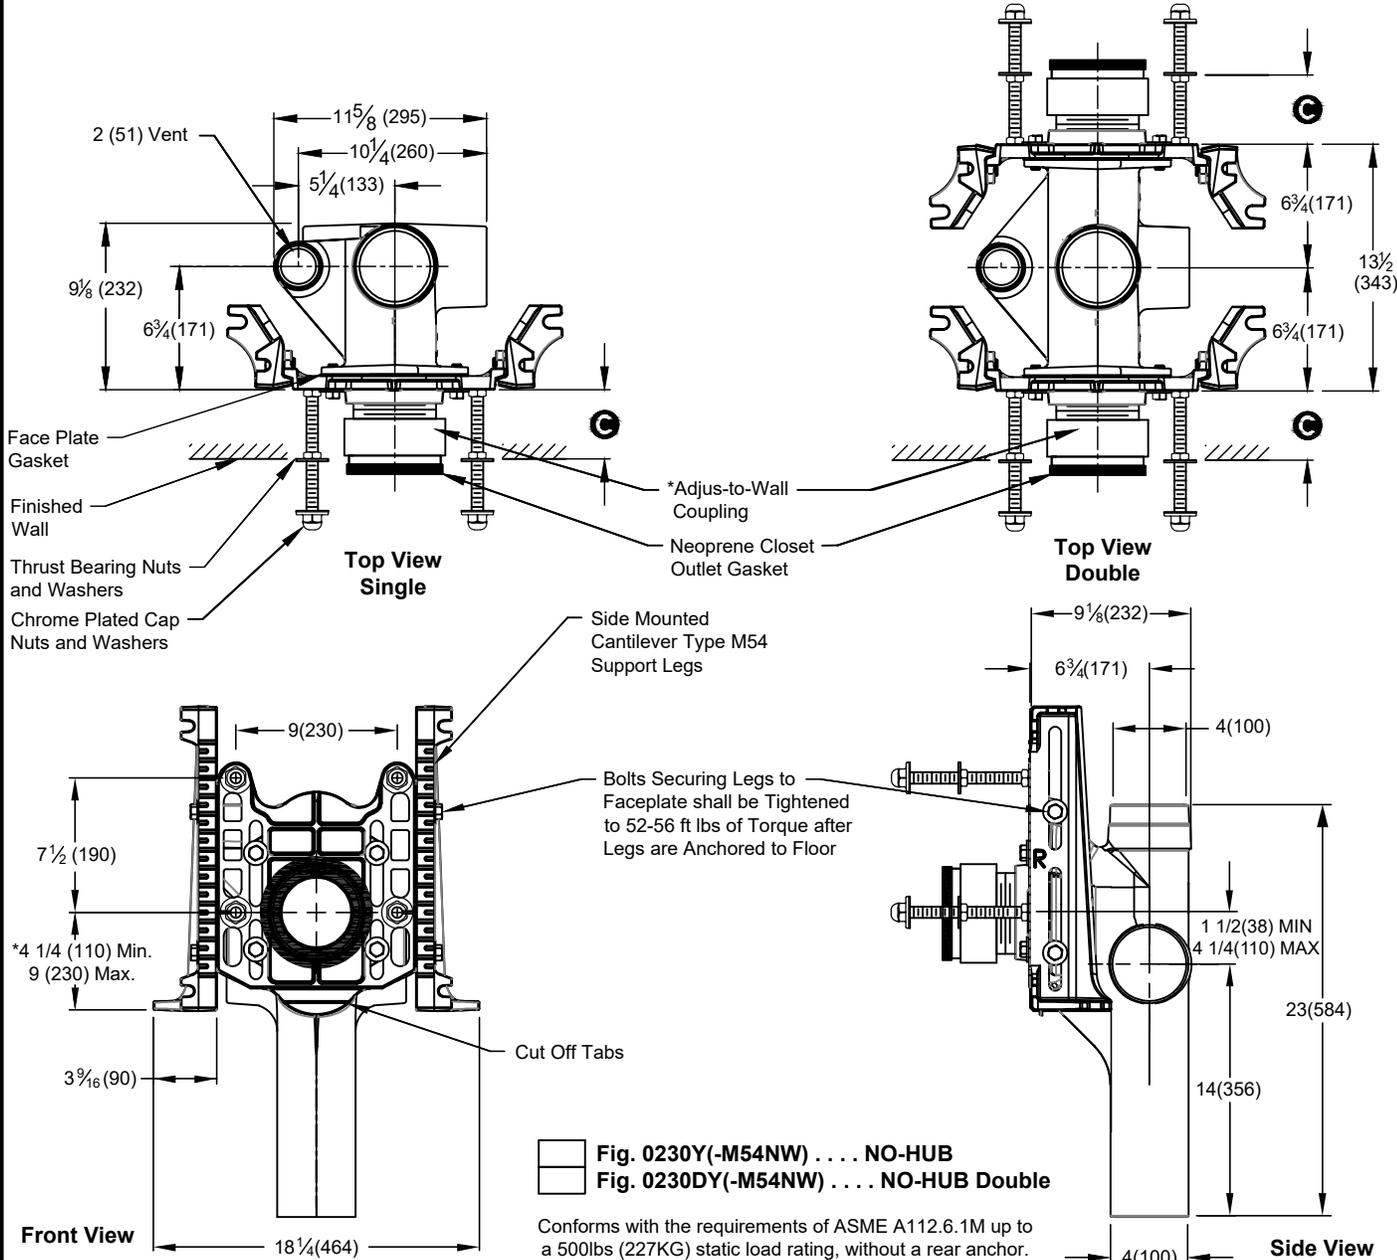

- NOTES:**
- Support must be securely anchored to the structural slab with one 1/2" (13) anchor per support leg, each able to withstand a pull-out force of 1750 lbs (974 kg). Pull-out force is a calculated value, no safety factor has been applied.
 - The side mounted Cantilever Type M54 support legs do not require a rear anchor on the fitting.
 - Cast iron components are Duco coated.
 - 9" (230) core drilled hole is required for rough-in 4 1/4 (110) thru 6 1/2 (165).
 - Dimensions shown in parentheses are in millimeters.

Ⓢ Dimension = 4" (100) (regularly furnished) consisting of nipple and Adjus-to-Wall coupling permitting adjustment from 3"(76) min. to 4"(100) max. Longer nipples are available, specify Ⓢ dimension. Absolute minimum Ⓢ dimension is 1 1/2" (38) with short butt end nipple less the Adjus-to-Wall coupling.

*ABS (Regularly Furnished)

D	2-13-25	Added Double Option Revised DWG Revised Fig. Opts. Revised Notes	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 0230Y (-M54NW)
C	2-11-25		HS	CL			
B	8-28-24		HS	CL			
A	6-27-24		HS	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			