
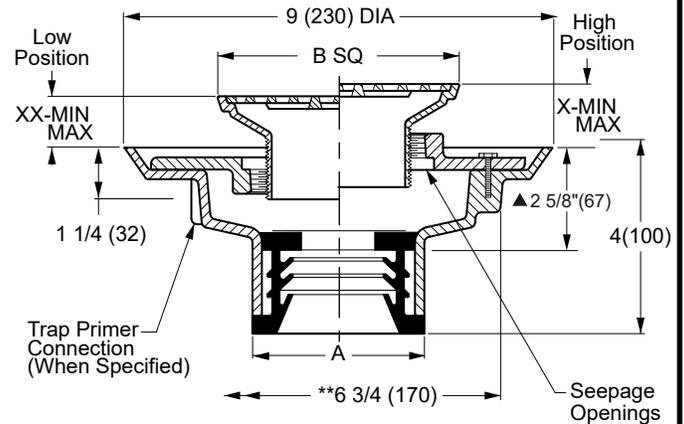


FLOOR OR SHOWER DRAINS WITH REINFORCED SQUARE ADJUSTABLE STRAINER HEAD

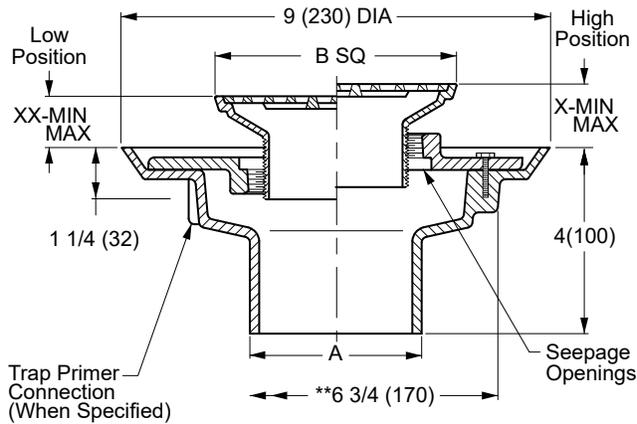

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

NO-HUB OUTLET

Fig. 2005Y(-K)

SPEEDI-SET OUTLET

Fig. 2005L(-K)

Strainer Size B SQ	*Collar In High Position X		*Collar In Low Position XX		Free Area SQ IN (SQ CM)
	MIN	MAX	MIN	MAX	
05 (125)	1 1/4(32)	2 1/4(57)	3/4(19)	1 5/8(41)	6.5(42)
06 (150)	1 1/4(32)	2 1/4(57)	3/4(19)	1 5/8(41)	12.5(81)
07 (180)	1 1/4(32)	2 1/4(57)	7/8(22)	1 7/8(48)	11(71)
08 (205)	1 1/2(38)	2 1/2(64)	1(25)	1 7/8(48)	14(90)

▲This dimension to internal stop of speedi-set gasket.
 * Collar is reversible to obtain extreme high and low strainer positions.
 ** MIN 6 3/4"(170) hole required for core drilled application.

REGULARLY FURNISHED:
 Duco Cast Iron Body with Flashing
 Collar and Reinforced Square
 Adjustable Strainer Head.

VARIATIONS:

- L Speedi-Set Service Weight 2(50), 3(75) & 4"(100) only
- LXH Speedi-Set Extra Heavy 2(50), 3(75) & 4"(100) only
- Sediment Bucket -B
- Trap Primer Connection -P050 1/2" (13) & -P075 3/4" (19)
- Vandal Proof Screws -U
- Wide Flanged Strainer (Specify Fig. DX2005)
- T Threaded Outlet

OPTIONAL MATERIALS:

- Bronze Body -BB
- Chrome Plated Strainer -CP
- Galvanized Cast Iron Body -G
- Nickel Bronze Strainer -NB
- Polished Bronze Strainer -PB

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: S2005(-K)-CAN
 SIZE: A
 SCALE: NONE
 DATE: 12-1-08
 APPROVED BY: CEL
 CHECKED BY: CL
 DRAWN BY: RN
 FIGURE NUMBER: 2005(-K)-CAN
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY
A	10-12-23	Removed Function	HS	CL

WEIGHT POUNDS	VOLUME CUBIC FEET
---------------	-------------------

FIGURE NUMBER
2005(-K)-CAN