


SPECIAL PURPOSE COMBO ROOF DRAIN

Free Area
 71.50 SQ IN
 (461) SQ CM

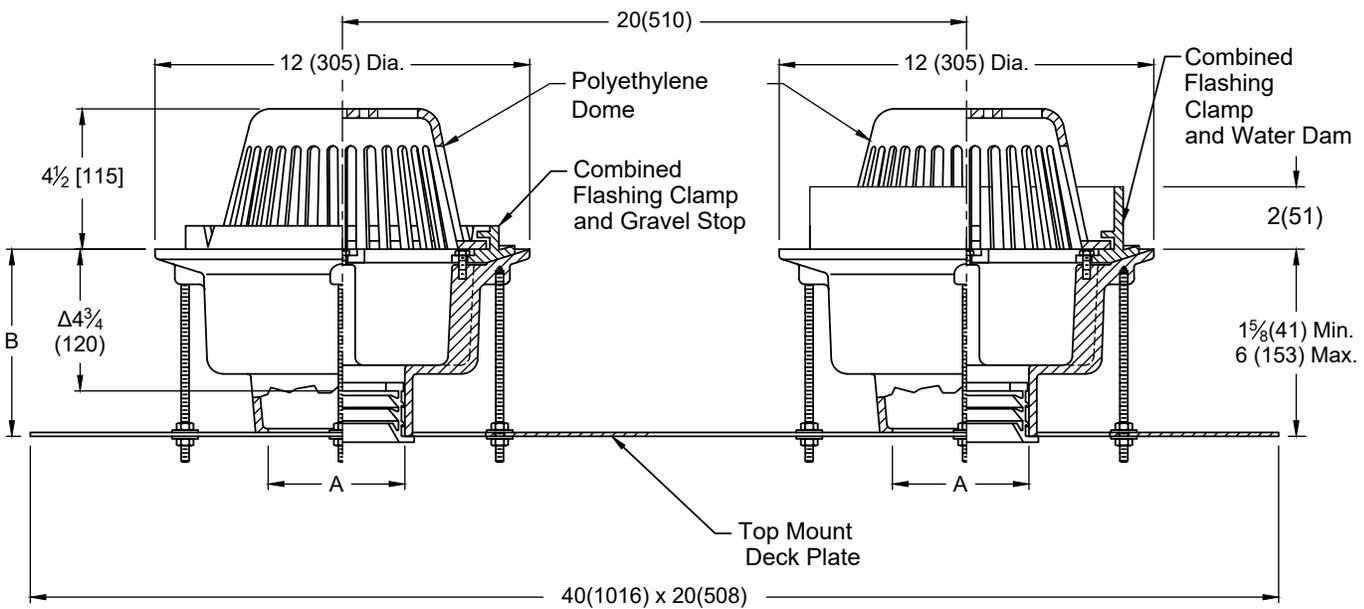

Δ This Dimension to Internal Stop of Speedi-Set® Gasket.

recommended deck opening per drain
12 (305) DIA

A SIZE	02 (50)	03 (75)	04 (100)	05 (125)	06 (150)
B (Body Height)	6 (150) for Caulk, NO-HUB and Speedi-Set®				
	4 3/4 (120) for Threaded				

- Fig. 1851C CAULK OUTLET
- Fig. 1851Y NO-HUB OUTLET
- Fig. 1851T THREADED OUTLET

REGULARLY FURNISHED:
 Duco Cast Iron Bodies with Combined Flashing Clamp and Gravel Stop for Roof Drain and Combined Flashing Clamp and 2(51) High External Water Dam for Overflow Drain, Polyethylene Domes and Top Mount Double Deck Plate with Securing Holes and Hardware for Elevating Drains.

- VARIATIONS:**
- L Speedi-Set® Service Weight 02(50), 03(75), 04(100) sizes only
 - LXH Speedi-Set® Extra Heavy 02(50), 03(75), 04(100) sizes only
 - Vandal Proof Dome -U
 - 2 1/2(64), 3(76) or 4(102) Water Dams Available -WD025, -WD03 or -WD04
 - 4"(102) Tall S.S. Perforated Gravel Guard -GG04

- OPTIONAL MATERIALS:**
- Aluminum Dome -AD
 - Cast Iron Dome -CID
 - Galvanized Cast Iron -G
 - Rough Bronze Dome -RBD
 - Stainless Steel Mesh Over Dome -SSM

NOTE: Dimensions shown in parentheses are in millimeters

DRAWING NUMBER **s1851**

SIZE **A**

SCALE: **NONE**

DATE: **7-30-2020**

APPROVED BY: **CL**

CHECKED BY: **CL**

DRAWN BY: **MW**

FIGURE NUMBER **1851**

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
	7-12-24 3-8-23	Revised Variations and Opt. Mat. Added @ to "Speedi-Set"	HS KK	CL CL			1851