



RESTROOM FIXTURES

Super Secur

MODEL 1035R / 1036R
URINAL, REAR MOUNTED
HEU HIGH EFFICIENCY URINAL

TECHNICAL DATA

High Efficiency Urinals are engineered to combine attractive looks with versatility, and intended for mounting onto a finished wall from an accessible pipe chase. Unit features a contoured interior to facilitate cleaning. Urinals mounted at 17" rim height comply with ANSI, ADA, UFAS accessibility requirements. Compliance is subject to the interpretation and requirements of the local code authority.

Fixture Bowl is fabricated of 16 gage type 304 stainless steel and the Housing fabricated of 18 gage type 304 stainless steel with exterior surfaces polished to a satin finish.

Urinal is a high efficiency type requiring a 1/8 GPF (0.47 Liters per Flush) Flush Valve and supplied with 3/4" NPT Flushing Inlet connection and 1-1/2" O.D. plain end P-Trap.



Model Shown: 1036R HEU, TOP SUPPLY WITH OPTIONAL FLUSH VALVE

MODEL:

(Must Specify)

- 1035R Rear Mount Urinal, HEU, Wall Supply
- 1036R Rear Mount Urinal HEU, Top Supply

OPTIONS

(additional costs may be incurred)

- EG Enviro-Glaze (For Color Selection, See Flier)

(See separate submittal for Flush Valve)

SUGGESTED SPECIFICATIONS

Provide Murdock Super Secur Stainless Steel Urinal (specify model number and options). Urinal mounted at 17" rim height to comply with ANSI, ADA and UFAS accessibility requirements. Interior to have a contoured surface to facilitate cleaning. Fixture shall be fabricated of 18 gage with 16 gage Bowl type 304 stainless steel with exposed surfaces polished to a satin finish.



Member of U.S. Green Building Council



Recyclable Product



Water Conserving Product


WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP INTERNATIONAL




RESTROOM FIXTURES

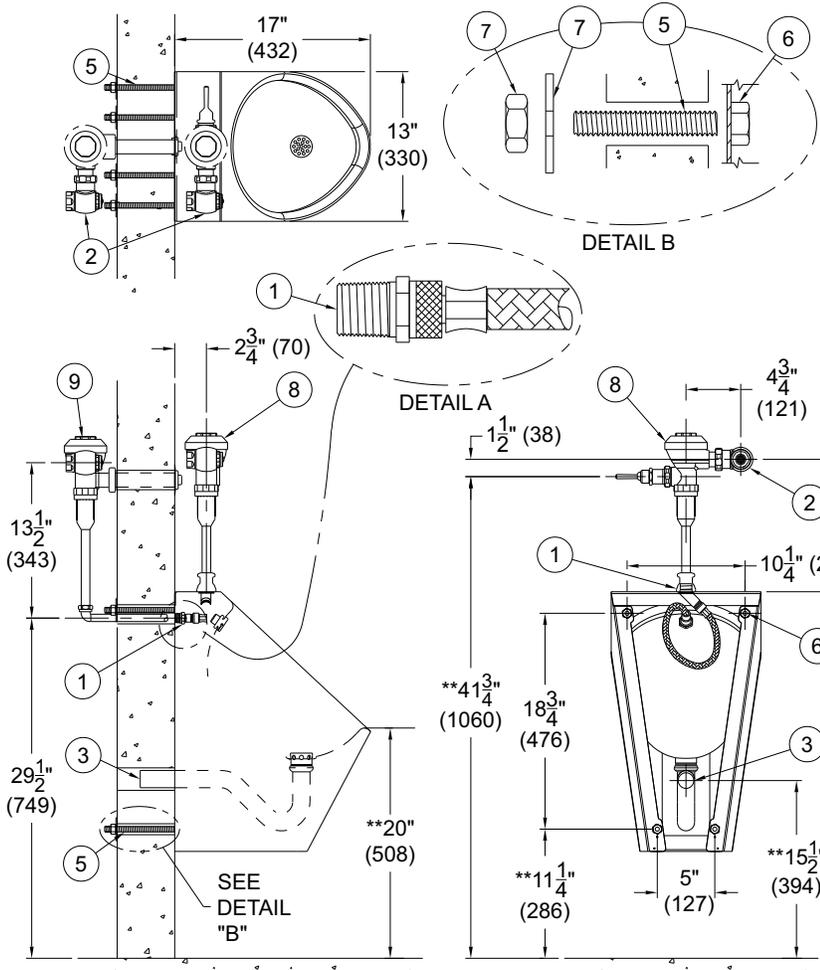

NOTE: REFER TO ADA GUIDELINES FOR COMPLETE INSTALLATION REQUIREMENTS. ALL VERTICAL DIMENSIONS INDICATED () DECREASE PROPORTIONALLY WITH ADA RIM HEIGHT:**

- ADA REQUIRES A RIM HEIGHT OF 17" AFF MAXIMUM, WASTE OUTLET BECOMES 11-1/2" AFF.
- ADA COMPLIANT FLUSH VALVE REQUIRED.

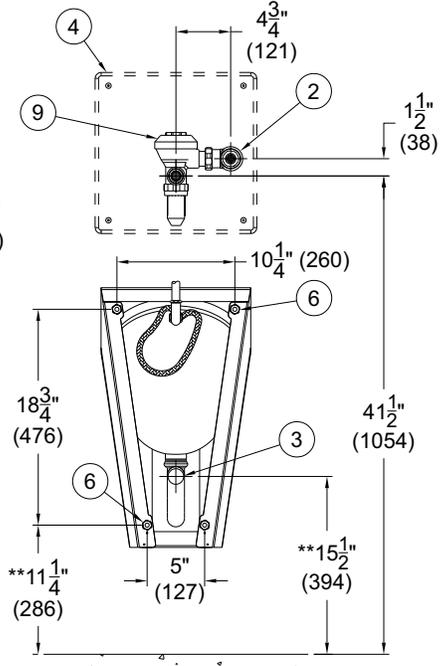

1036R HEU, TOP SUPPLY

1035R HEU, WALL SUPPLY

- | | | |
|--|---|---|
| <ol style="list-style-type: none"> 1. MALE ADAPTER WITH FLEXIBLE HOSE PROVIDED FOR 1035R WALL SUPPLY MODELS, DETAIL "A" 2. 3/4" NPT FLUSH VALVE INLET 3. 1-1/2" OD PLAIN END WASTE OUTLET | <ol style="list-style-type: none"> 4. OPTIONAL 2898 FLUSH VALVE ACCESS PANEL SHOWN FOR REFERENCE 5. 1/2"-13 UNC MOUNTING HARDWARE PROVIDED 6. 1/2"-13 UNC WELD NUTS FOR FIXTURE MOUNTING | <ol style="list-style-type: none"> 7. WASHERS AND HEX NUTS FOR HARDWARE PROVIDED 8. EXPOSED FLUSH VALVE 9. CONCEALED FLUSH VALVE |
|--|---|---|

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	Model Number & Options _____	Quantity _____
	Company _____	
	Contact _____	Title _____
	Signature (Approval for Manufacturing) _____	Date _____
	<p><small>All dimensions are subject to manufactures tolerance of plus or minus 1/2" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.murdockmfg.com for most current specifications.</small></p>	