

## A191.8-BF Series

BARRIER FREE, WALL MOUNTED  
CHILLED DRINKING FOUNTAIN WITH  
BOTTLE FILLER AND TRIM PANEL

### STANDARD FEATURES

- Both Child or Adult ADA Compliant (When Properly Installed)
- 304 Stainless Steel Basin and Chrome Plated Brass Button
- Polished Stainless Steel, Anti-Rotation Non-Squirt Bubblers or Flexible Low Flow Bubbler
- 100-Mesh Inlet Strainer
- Mounting Plate Hardware (A0000000-MP9)
- Chiller Mounting Frame (A0000000-MF21)
- 1 GPM Laminar Flow Water Spout (Bottle Filler)
- 115v Plug-in Transformer (Bottle Filler with Sensor Op)
- Auto-Stop Allows Cartridge and Strainer Service Without Shutting Off Water Supply

### SUGGESTED SPECIFICATIONS

#### Electric Water Cooler

Model A191408S-BF is a wall mounted, pressurized Chilled Drinking Fountain and Bottle Filler combination that shall deliver a minimum of **8.0 GPH** (30.3 LPH) of water at 50°F (10°C) cooled from 80°F (26.7°C) inlet water and 90°F (32.2°C) ambient. Unit shall be activated by Chrome Plated Brass Pushbutton using less than 5 pounds of force, which activates internally mounted valves with adjustable stream regulators controlling the water flow. Basin shall be constructed from 304 Stainless Steel and have an Integral Drain. Cabinet shall be made from 18 gauge, 304 stainless steel with a brushed finish. Cooling system shall use R-134a refrigerant and be Capillary Tube regulated. Chiller shall include Factory installed Water Leak Detection Auto Shut-Off Valve. Bubblers shall be polished stainless steel with non-squirt features and operate on a water pressure range of 20-105 PSIG. Chiller shall be listed by Underwriters Laboratories for both the US and Canada and is compliant to the Air Conditioning and Refrigeration Institute Standard 1010. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.

#### Bottle Filler

Bottle Filler housing construction will be 20 gauge Stainless Steel with a satin finish and will also include components manufactured from Antimicrobial, impact resistant ABS. Bottle Filler shall provide approximately 1 GPM flow rate with a Laminar Flow Spout to minimize splashing.

**Bottle Filler -BF11** shall include Pushbutton Operated activation.

**Bottle Filler -BF12** shall include Sensor Operated activation with a 20 second maximum run time. Optional -BCD (Bottle Counter Display) indicates the quantity of 16 oz disposable Plastic Bottles saved from a land fill, displays the Water Filter status and includes LED Light to illuminate and brighten the Bottle Fill area when a Bottle is detected.



Model A191408S-BF11 Shown  
Patent D873,606 #10,100,933

**“INDOOR USE ONLY”**

Model Number	GPH*	Rated Watts	Full Load Amps	Approx. Shipping Weight
A191408S-BF	8.0	390	4.4	130 lbs.

\* GPH of 50°F water at 90°F ambient room temperature and 80°F inlet water temperature  
Compressor motor operates on 115 Volt / 60 Hz single phase.

#### MODEL:

(Must Specify Drinking Fountain)

#### FLEXIBLE BUBBLER

- A191408F-BF11 Drinking Fountain and Bottle Filler with Pushbutton Operation
- A191408F-BF12 Drinking Fountain and Bottle Filler with Sensor Operation

#### STAINLESS STEEL BUBBLER

- A191408S-BF11 Drinking Fountain and Bottle Filler with Pushbutton Operation
- A191408S-BF12 Drinking Fountain and Bottle Filler with Sensor Operation

#### OPTIONS

(additional costs may be incurred)

- BF12-BCD Bottle Counter Display (Bottle Filler)
- 220V 220 volt / 50 Hz compressor (€ €)

#### ACCESSORIES

(additional costs may be incurred)

- WF3000 3000-gallon PFAS Water Filter<sup>1</sup>  
NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics

#### NOTES:

1- Refer to Supplemental Submittal Sheet for Complete Product details.

Complies with the following standards:



Federal Public Law 111-380 (No Lead)



(220V Compressor Only)

NSF/ANSI/CAN 61-2020

ANSI/ASHRAE 18

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)




[3000 Gallon PFAS Filter Certifications](#)

[Product Warranty](#)

**A191.8-BF Series**

BARRIER FREE, WALL MOUNTED  
CHILLED DRINKING FOUNTAIN WITH  
BOTTLE FILLER AND TRIM PANEL

- GENERAL NOTES:  
 1. ALL DIMENSIONS ARE IN INCHES [MM]  
 \*2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT  
 HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY  
 TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES  
 3. WATER LINE FROM CHILLER TO FOUNTAIN SHOULD BE  
 COVERED WITH SPONGE FOAM RUBBER OR ICE WATER  
 TYPE INSULATION OF ADEQUATE THICKNESS

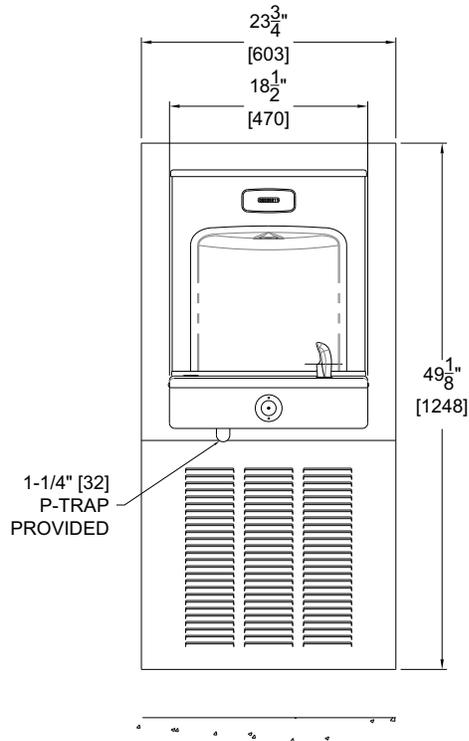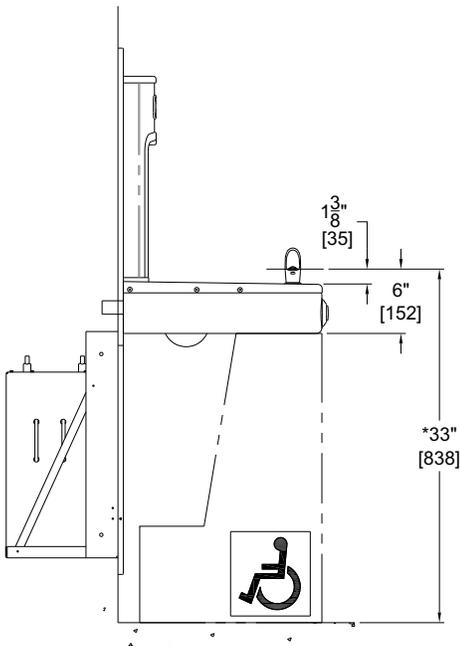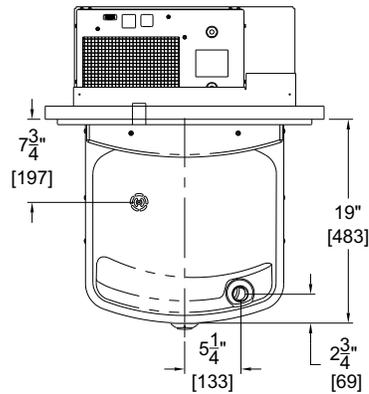

SELECTION SUMMARY  
& APPROVAL FOR  
MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock<sup>®</sup> assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock<sup>®</sup> Mfg., Member of Morris Group International<sup>®</sup>. Please visit [www.murdockmfg.com](http://www.murdockmfg.com) for most current specifications.