

# A131.8-VR Series

## MODEL A131408S-VR-BF4

BARRIER FREE, VANDAL RESISTANT, WALL MOUNTED CHILLED DRINKING FOUNTAIN WITH SEMI-RECESSED SENSOR OPERATED BOTTLE FILLER

### STANDARD FEATURES

- Child or Adult ADA Compliant (When Properly Installed)
- 18 gauge, 304 Stainless Steel Basin and Chrome Plated Brass Button
- Polished Stainless Steel, Vandal Resistant, Anti-Rotation Non-Squirt Bubbler
- 100-Mesh Inlet Strainer
- Mounting Frame (A0000000-MF11)
- Trim Panel and Louvered Grille
- 1 GPM Fill Rate (Bottle Filler)
- Laminar Flow Water Supply (Bottle Filler)
- 115v Plug-in Transformer (Bottle Filler)
- Auto-Stop Allows Cartridge and Strainer Service Without Shutting Off Water Supply
- Chiller includes Water Leak Detection Auto Shut-Off Valve

### SUGGESTED SPECIFICATIONS

Model A131408S-VR-BF4 is a Vandal Resistant, Wall Mounted, pressurized Chilled Drinking Fountain and Bottle Filler combination that shall deliver a minimum of **8.0 GPH** (30.3 LPH) of water at 50°F (10°C) cooled from 80°F (26.7°C) inlet water and 90°F (32.2°C) ambient. Unit shall be activated by Chrome Plated Brass Pushbutton using less than 5 pounds of force. Bottle filler activates using an infrared sensor. Cooling system shall use R-134a refrigerant and be capillary tube regulated. Chiller shall include Factory installed Water Leak Detection Auto Shut-Off Valve. Bubbler shall be polished stainless steel with non-squirt features and operate on a water pressure range of 20-105 PSIG. Unit shall have uniquely designed, two-piece contoured bowl with a p-trap integral to the unit. Chiller shall be listed by Underwriters Laboratories for both the US and Canada and is compliant to the Air Conditioning and Refrigeration Institute Standard 1010. Fountain and Chiller shall be listed by Underwriters Laboratories for both the US and Canada and is to be compliant to ANSI/ASHRAE 18. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.

Model Number	GPH*	Rated Watts	Full Load Amps	Approx. Shipping Weight
A131408S-VR-BF4	8.0	390	4.6	130 lbs.

\*GPH of 50°F water at 90°F ambient room temperature and 80°F inlet water temperature. Compressor motor operates on 115 Volt / 60 Hz single phase.

Complies with the following standards:



(220V Compressor Only)

NSF/ANSI/CAN 61-2020

ANSI/ASHRAE 18



Model A131408S-VR-BF4 Shown  
\*\* U.S. DESIGN PATENT D545,607

“INDOOR USE ONLY”

### MODEL:

(Must Specify)

#### FLEXIBLE BUBBLER (LOW FLOW)

- A131208F-VR-BF4 Bronze Finish
- A131308F-VR-BF4 Gold Finish (High Polish)
- A131408F-VR-BF4 Satin stainless Finish

#### LEAD-FREE STAINLESS STEEL BUBBLER

- A131208S-VR-BF4 Bronze Finish
- A131308S-VR-BF4 Gold Finish (High Polish)
- A131408S-VR-BF4 Satin stainless Finish (Shown)

### OPTIONS

(additional costs may be incurred)

- BCD Bottle Counter Display (Bottle Filler)
- HP High Polished Stainless Steel
- 220V 220 volt / 50 Hz Compressor (€€)

### ACCESSORIES

(additional costs may be incurred)

- WF3000 3000-gallon PFAS Water Filter<sup>1</sup>  
NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics

### NOTES:

1- Refer to Supplemental Submittal Sheet for Complete Product Details.

[3000 Gallon PFAS Filter Certifications](#)


[Product Warranty](#)

⚠ WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

# A131.8-VR Series


## MODEL A131408S-VR-BF4

BARRIER FREE, VANDAL RESISTANT, WALL MOUNTED CHILLED DRINKING FOUNTAIN WITH SEMI-RECESSED SENSOR OPERATED BOTTLE FILLER

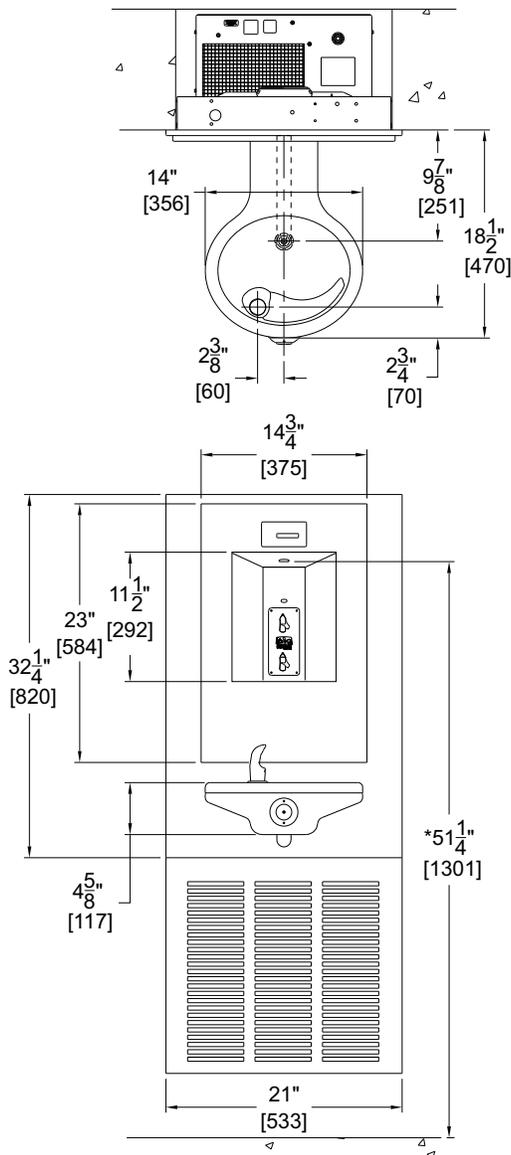

**GENERAL NOTES:**

1. ALL DIMENSIONS ARE IN INCHES [MM]
- \*2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES
3. WATER LINE FROM CHILLER TO FOUNTAIN SHOULD BE COVERED WITH SPONGE FOAM RUBBER OR ICE WATER TYPE INSULATION OF ADEQUATE THICKNESS

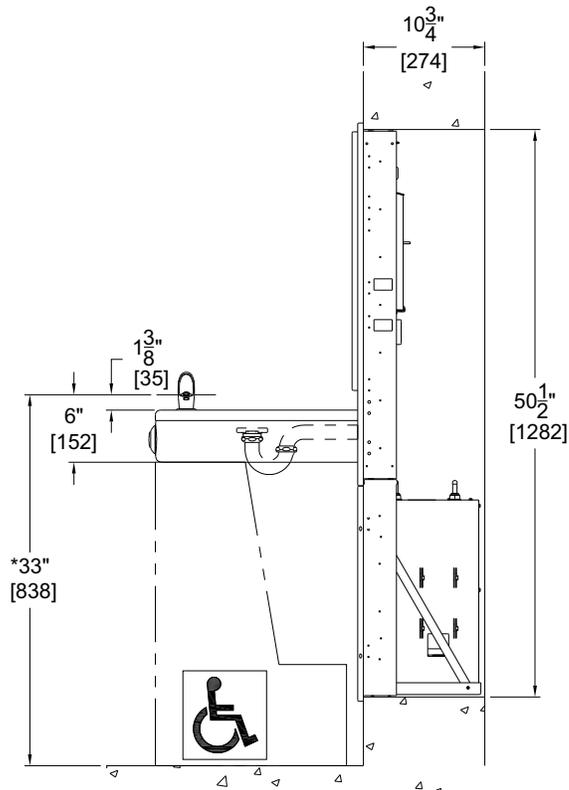

**SELECTION SUMMARY & APPROVAL FOR MANUFACTURING**

Model Number & Options \_\_\_\_\_ Quantity \_\_\_\_\_

Company \_\_\_\_\_

Contact \_\_\_\_\_ Title \_\_\_\_\_

Signature (Approval for Manufacturing) \_\_\_\_\_ Date \_\_\_\_\_

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock<sup>®</sup> assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock<sup>®</sup> Mfg., Member of Morris Group International<sup>®</sup>. Please visit [www.murdockmfg.com](http://www.murdockmfg.com) for most current specifications.