


SPECIAL ROOF DRAIN WITH EXTENSION

WATER DAM COLLAR TYPE

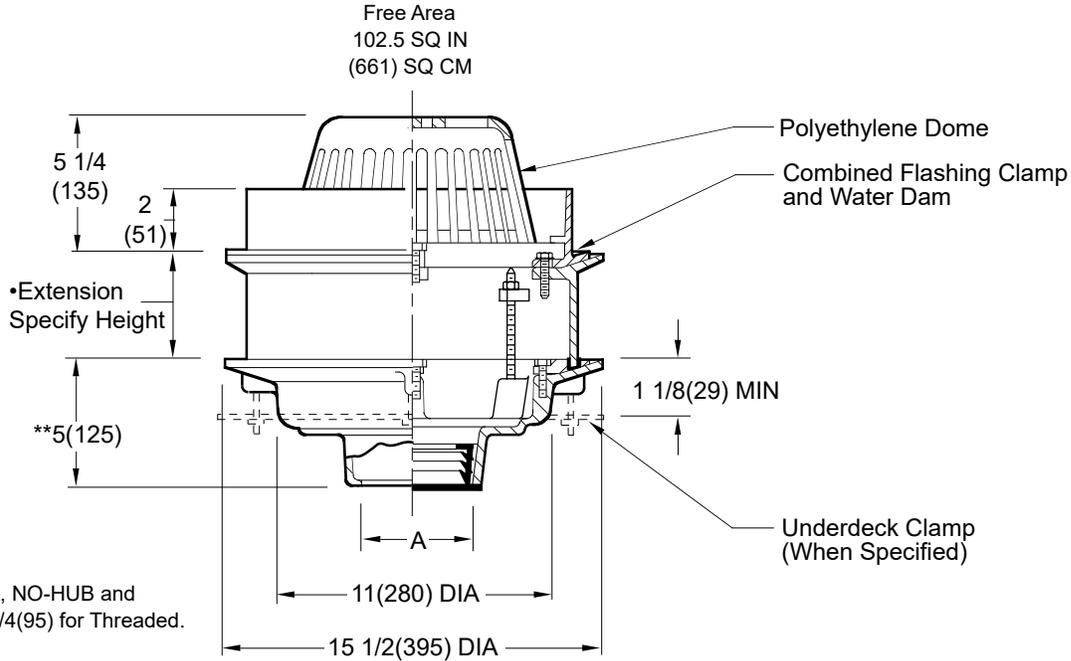

**Same for Caulk, NO-HUB and Speedi-Set®. 3 3/4(95) for Threaded.

A (Pipe Size) 02(50), 03(75) or 04(100)

- Fig. 1080C (-E) CAULK OUTLET
- Fig. 1080Y (-E) NO-HUB OUTLET

REGULARLY FURNISHED:
 Duco Cast Iron Body with Extension, Combined Flashing Clamp and Water Dam and Polyethylene Dome.

•Extension thru 4"(100) size will be cast iron. Over 4"(100) will be fabricated stainless steel (Cast iron ext. shown)

- VARIATIONS:**
- Expansion Joint (Specify Fig. 1710)
 - "L" Shaped Underdeck Clamp -CL
 - Secondary Flashing Clamp -C2
 - Sump Receiver -R
 - Underdeck Clamp -C
 - 2 1/2(64), 3(76) or 4"(100) Water Dams -WD025, -WD03 or -WD04
 - T Threaded Outlet

- OPTIONAL MATERIALS:**
- Aluminum Dome -AD
 - Cast Iron Dome -CID
 - Galvanized Cast Iron -G
 - Rough Bronze Dome -RBD

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S1080 (-E)
 SIZE A
 SCALE: NONE
 DATE: 10-29-85
 APPROVED BY: KG
 CHECKED BY: TD
 DRAWN BY: CM
1080 (-E)
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							1080 (-E)