


# ROOF-CEPTOR® INDIRECT WASTE DRAIN

## 7 1/4"(185) TOP - MEDIUM DEPTH RECEPTORS

Conforms to ASME A112.6.7/CSA B79.7

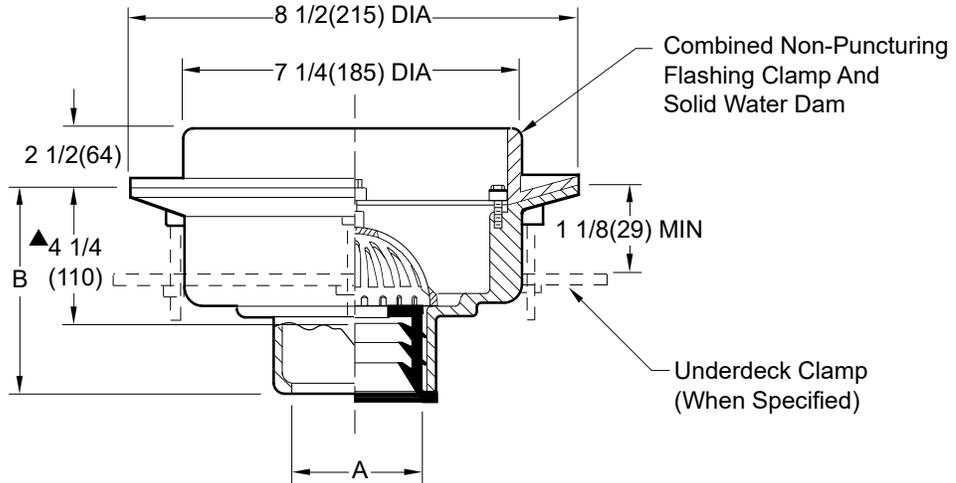

- Fig. 3960C ..... CAULK OUTLET
- Fig. 3960Y ..... NO-HUB OUTLET
- Fig. 3960T ..... THREADED OUTLET

▲ This Dimension to Internal Stop of Speedi-Set® Gasket

recommended deck openings:  
 with suffix -R - 9"(230)  
 less suffix -R - 7 3/4"(195)

A SIZE	02 (50)	03 (75)	04 (100)
B	5 1/2(140) for Caulk, NO-HUB and Speedi-Set®. 4 1/4(110) for Threaded		

**REGULARLY FURNISHED:**  
 Duco Cast Iron Receptor with Solid Water Dam and Secured Cast Iron Dome Bottom Strainer.

**VARIATIONS:**

- Extension -E
- L Speedi-Set® Service Weight
- LXH Speedi-Set® Extra Heavy
- Roof Sump Receiver -R
- Underdeck Clamp -UDC
- Roof Deck Plate -RDP

**OPTIONAL MATERIALS:**

- All Galvanized -G

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S3960  
 SIZE A  
 SCALE: NONE  
 DATE: 9-19-85  
 APPROVED BY: JD  
 CHECKED BY: JD  
 DRAWN BY: PJ  
 FIGURE NUMBER 3960  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE  
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
	5-8-25	Added RDP Option	JJT	BW			<b>3960</b>
	4-19-24	Added ASME Note	HS	BW			
	7-26-23	Removed Function	HS	CL			
	3-13-23	Added ® to Speedi-Set	KK	CL			