

A192.8-BF Series

BARRIER FREE, BI-LEVEL, WALL MOUNTED
CHILLED DRINKING FOUNTAIN WITH BOTTLE
FILLER AND 42" TRIM PANEL

STANDARD FEATURES

- Both Child or Adult ADA Compliant (When Properly Installed)
- 304 Stainless Steel Basin and Chrome Plated Brass Button
- Polished Stainless Steel, Anti-Rotation Non-Squirt Bubbler or Flexible Low Flow Bubbler
- 100-Mesh Inlet Strainer
- Mounting Bracket Hardware (A0000000-MP10)
- Chiller Mounting Frame (A0000000-MF22)
- 42" Wide Trim Panel and Louvered Grille
- 1 GPM Laminar Flow Water Spout (Bottle Filler)
- 115v Plug-in Transformer (Bottle Filler with Sensor Op)
- Auto-Stop Allows Cartridge and Strainer Service Without Shutting Off Water Supply

SUGGESTED SPECIFICATIONS

Electric Water Cooler

Model A192408S-BF is a wall mounted, Bi-Level pressure Chilled Drinking Fountain and Bottle Filler combination that shall deliver a minimum of **8.0 GPH** (30.3 LPH) of water at 50°F (10°C) cooled from 80°F (26.7°C) inlet water and 90°F (32.2°C) ambient. Unit shall be activated by Chrome Plated Brass Pushbutton using less than 5 pounds of force, which activates internally mounted valves with adjustable stream regulators controlling the water flow. Basin shall be constructed from 304 Stainless Steel and have an Integral Drain. Cabinet shall be made from 18 gauge, 304 stainless steel with a brushed finish. Cooling system shall use R-134a refrigerant and be Capillary Tube regulated. An Adjustable Thermostat with an off position shall regulate the refrigeration system. Bubblers shall be polished stainless steel with non-squirt features and operate on a water pressure range of 20-105 PSIG. Chiller shall be listed by Underwriters Laboratories for both the US and Canada and is compliant to the Air Conditioning and Refrigeration Institute Standard 1010. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.

Bottle Filler

Bottle Filler housing construction will be 20 gauge Stainless Steel with a satin finish and will also include components manufactured from Antimicrobial, impact resistant ABS. Bottle Filler shall provide approximately 1 GPM flow rate with a Laminar Flow Spout to minimize splashing.

Bottle Filler -BF11 shall include Pushbutton Operated activation.

Bottle Filler -BF12 shall include Sensor Operated activation with a 20 second maximum run time. Optional -BCD (Bottle Counter Display) indicates the quantity of 16 oz disposable Plastic Bottles saved from a land fill, displays the Water Filter status and includes LED Light to illuminate and brighten the Bottle Fill area when a Bottle is detected. (Not offered with -BAT.)

NOTE:

1 - Refer to Supplemental Submittal Sheets for Details

Complies with the following standards:



NSF/ANSI/CAN 61-2020

ANSI/ASHRAE 18

(220V Compressor Only)



Model A192408S-BF12-BCD Shown
Patent D873,606 #10,100,933

"INDOOR USE ONLY"

| Model Number | GPH* | Rated Watts | Full Load Amps | Approx. Shipping Weight |
|--------------|------|-------------|----------------|-------------------------|
| A192408S-BF | 8.0 | 390 | 4.4 | 235 lbs. |

* GPH of 50°F water at 90°F ambient room temperature and 80°F inlet water temperature
Compressor motor operates on 115 Volt / 60 Hz single phase.

MODEL:

(Must Specify Drinking Fountain)

FLEXIBLE BUBBLER

- A192408F-BF11 Bi-Level Drinking Fountain and Bottle Filler with Pushbutton Operation
- A192408F-BF12 Bi-Level Drinking Fountain and Bottle Filler with Sensor Operation

STAINLESS STEEL BUBBLER

- A192408S-BF11 Bi-Level Drinking Fountain and Bottle Filler with Pushbutton Operation
- A192408S-BF12 Bi-Level Drinking Fountain and Bottle Filler with Sensor Operation

OPTIONS

(additional costs may be incurred)

- BF12-BCD Bottle Counter Display (Bottle Filler)
- RBL Reverse Bi-Level (Bottle Filler Opposite) Mounting Plate (A0000000-MP10)
- 220V 220 volt / 50 Hz compressor (€)

ACCESSORIES

(additional costs may be incurred)

- SK11 Skirt kit, stainless steel, for upper unit¹
- WF3000 3000-gallon capacity Water Filter¹
NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics

NOTES:

1- Refer to Supplemental Submittal Sheet for Complete Product details.

3000 Gallon PFAS Filter Certifications




Product Warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

A192.8-BF Series
BARRIER FREE, BI-LEVEL, WALL MOUNTED
CHILLED DRINKING FOUNTAIN WITH BOTTLE
FILLER AND 42" TRIM PANEL

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES.
3. WATER LINE FROM CHILLER TO FOUNTAIN SHOULD BE COVERED WITH SPONGE FOAM RUBBER OR ICE WATER TYPE INSULATION OF ADEQUATE THICKNESS.

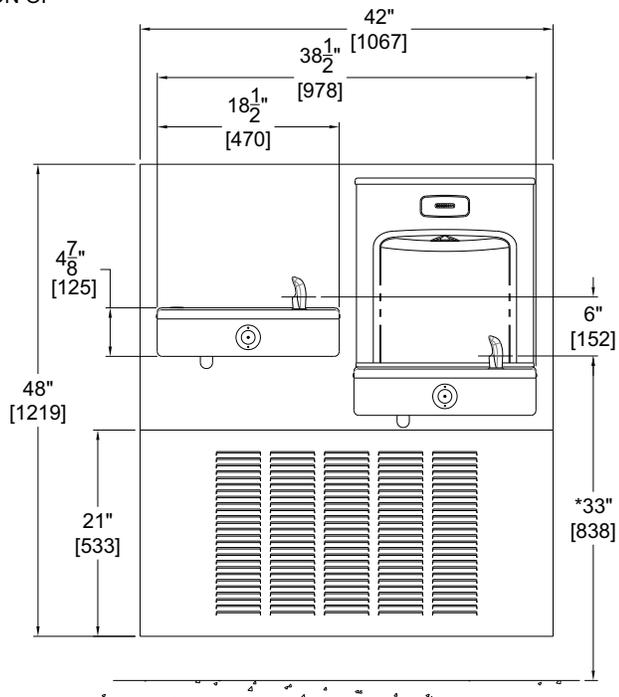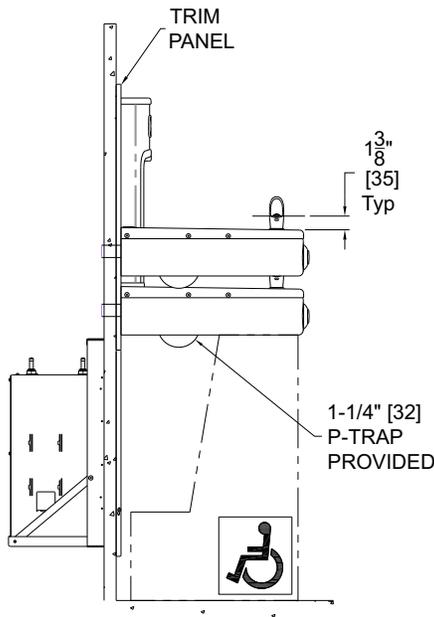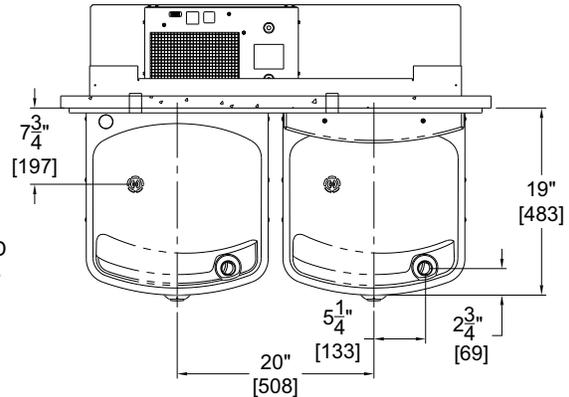

SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING

| | |
|----------------------------------------------------|----------------|
| Model Number & Options _____ | Quantity _____ |
| Company _____ | |
| Contact _____ | Title _____ |
| Signature (Approval for Manufacturing) _____ | Date _____ |

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock[®] assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock[®] Mfg., Member of Morris Group International[®]. Please visit www.murdockmfg.com for most current specifications.