


ROOF DRAINS

IRMA ROOF APPLICATIONS

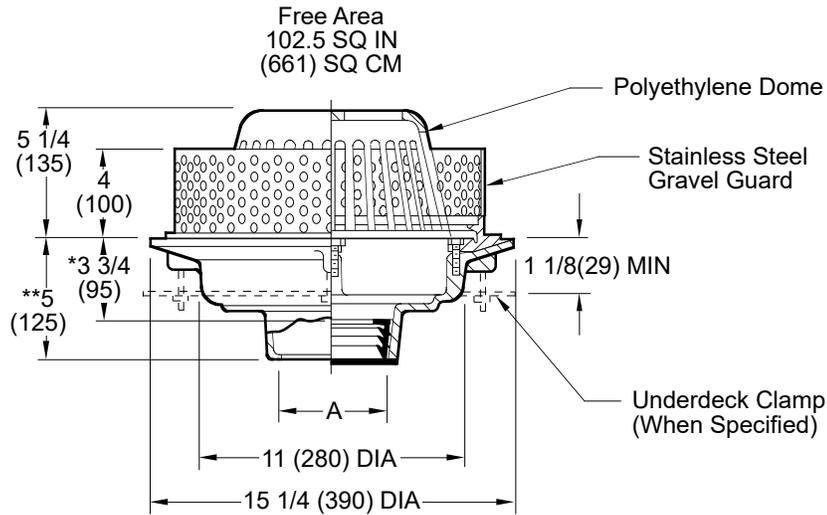

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

- Fig. 1011C CAULK OUTLET
- Fig. 1011Y NO-HUB OUTLET
- Fig. 1011T THREADED OUTLET

* This dimension to internal stop of Speedi-Set® Gasket
 **Same for Caulk, NO-HUB and Speedi-Set®, 3 3/4(95) for Threaded

recommended deck opening

with suffix -R	17(430) DIA
less Suffix -R	14(355) DIA

REGULARLY FURNISHED:

Duco Cast Iron Body with Flashing Clamp, 1/16"(2) Thick, 4"(100) High Stainless Steel Perforated Gravel Stop with 3/8"(10) Dia. Openings and Polyethylene Dome.

VARIATIONS:

- Expansion Joint (Specify Fig. 1710)
- Gravel Guard -GG (Specify Height)
- "L" Shaped Underdeck Clamp -CL
- L Speedi-Set® Service Weight 02(50), 03(75) & 04"(100) sizes only
- LXH Speedi-Set® Extra Heavy 02(50), 03(75) & 04"(100) sizes only
- Sump Receiver -R
- Underdeck Clamp -C
- Vandal Proof Dome -U
- Roof Deck Plate -RDP

OPTIONAL MATERIALS:

- ▲ Aluminum Dome -AD
- ▲ Cast Iron Dome -CID
- Cast Iron Dome w/SS Mesh -CIDS
- ▲ Galvanized Cast Iron Body & Collar -G
- ▲ Galvanized Cast Iron Dome -CIDG
- ▲ Rough Bronze Dome -RBD

▲ **Optional domes' free area are as follows:**

Aluminum	98 (632)
Cast Iron	80 (516)
Bronze	95 (613)

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S1011
 SIZE A
 SCALE: NONE
 DATE: 5-24-85
 APPROVED BY: TD
 CHECKED BY: TD
 DRAWN BY: BS
 1011
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

M	3-27-24	Revised Variations, Fig. Opts.	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1011
L	9-27-23	Removed Function	HS	CL			
K	2-23-23	Added @ to "Speedi-Set"	KK	CL			
J	7-30-19	Removed NOTE	MW	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			