

ADJUSTABLE FIXTURE SUPPORTS FOR ELEVATED BLOWOUT WATER CLOSETS FOR WHEELCHAIR USERS

DRAWING NUMBER
S0375Y

SIZE
A

SCALE:
NONE

DATE:
8-21-75

APPROVED BY:
RS

CHECKED BY:
RS

DRAWN BY:
RAS

0375Y

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

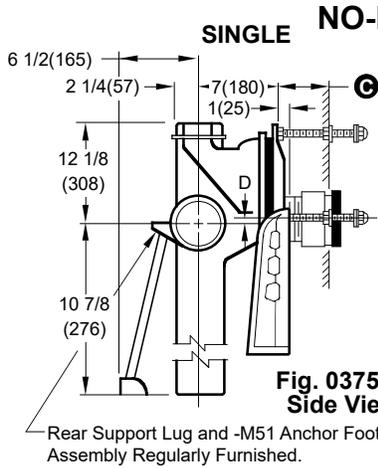


Fig. 0375LY Side View

Rear Support Lug and -M51 Anchor Foot Assembly Regularly Furnished.


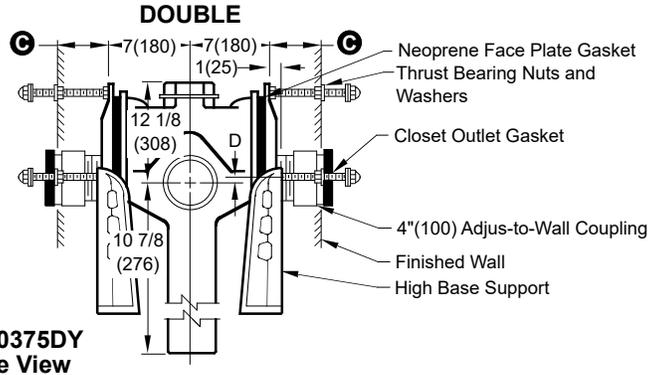


Fig. 0375DY Side View

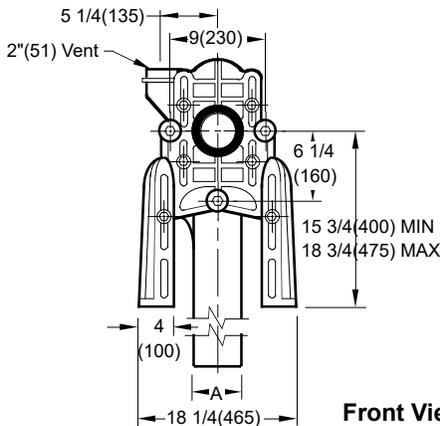

Front View

- Fig. 0375LY . . . NO-HUB Left Hand
- Fig. 0375RY . . . NO-HUB Right Hand
- Fig. 0375DY . . . NO-HUB Double

- NOTE:** Base Support must be firmly anchored to floor with four 1/2"(13) bolts provided by contractor.
NOTE: When used with concealed flush valve locate face plate behind supply pipe.
NOTE: 1 1/2(38) or 2"(51) tapped inlet available add suffix - N.
NOTE: C of Stack to End of NO-HUB Side Inlet is 5"(125)


A	D	
SIZE	MIN	MAX
4 (100)	4 3/4 (120)	8 3/4 (220)

The water closet outlet gasket regularly furnished is made of molded neoprene and designed to fit water closet outlet dimensions and configurations shown in ANSI Standard A112.19.2M-1995, Figure 13B. If gasket is not found to be compatible to fixture due to nonconformance of said fixture to ANSI A112.19.2M, then fixture manufacturer shall be consulted for a suitable gasket recommendation. Jay R. Smith assumes no liability for connections to fixtures which do not conform to these standards.

Conforms to ASME A112.6.1M.

Ⓢ DIMENSION - ADJUS-TO-WALL TYPE OUTLET CONNECTION

The Smith Adjus-to-Wall outlet connection provides adjustment at the face of the wall at the time the fixture is set; thus, compensating for wall construction variations. The Ⓢ dimension is measured from the front of the face plate to the finished wall. To properly determine the length of nipple required, deduct 3/4" from the Ⓢ dimension. When the Ⓢ dimension exceeds 7" (180), the -M40 Wide Pipe Chase Support is recommended. The Adjus-to-Wall coupling will provide 3/4" (13) horizontal adjustment in either direction. A 4" dimension is regularly furnished unless otherwise specified. A minimum Ⓢ dimension of 1 1/2" is available. This is achieved by using a short nipple less coupling.

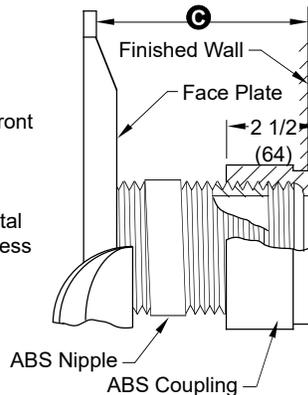

NIPPLE LENGTHS AVAILABLE

NIPPLE LENGTH	MIN	Ⓢ	MAX
2 1/2 (64)	2 3/4 (70)	3 3/4 (95)	
*3 1/4 (83)	3 (76)	4 1/2 (115)	
4 1/2 (115)	4 1/4 (110)	5 3/4 (145)	
5 1/4 (135)	5 (125)	6 1/2 (165)	
6 1/4 (160)	6 (150)	7 1/2 (190)	
7 (180)	6 3/4 (170)	8 1/4 (210)	
8 1/4 (210)	8 (205)	9 1/2 (240)	
10 (255)	9 3/4 (250)	11 1/4 (285)	
12 (305)	11 3/4 (300)	13 1/4 (335)	
15 (380)	14 3/4 (375)	16 1/4 (415)	
18 (455)	17 3/4 (450)	19 1/4 (490)	

NOTE: Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
J	4-16-24	Added ASME Note Rev. Adjus-to-Wall, Submittal Update Added Millimeters	HS	JT			0375Y
H	2-2-24		HS	CL			
G	7-1-98		ASL	BS			
F	1-23-98		EMB	BS			