


## FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS FOR UNFINISHED AREAS

### ROUND EXTRA HEAVY DUTY CAST IRON TOP

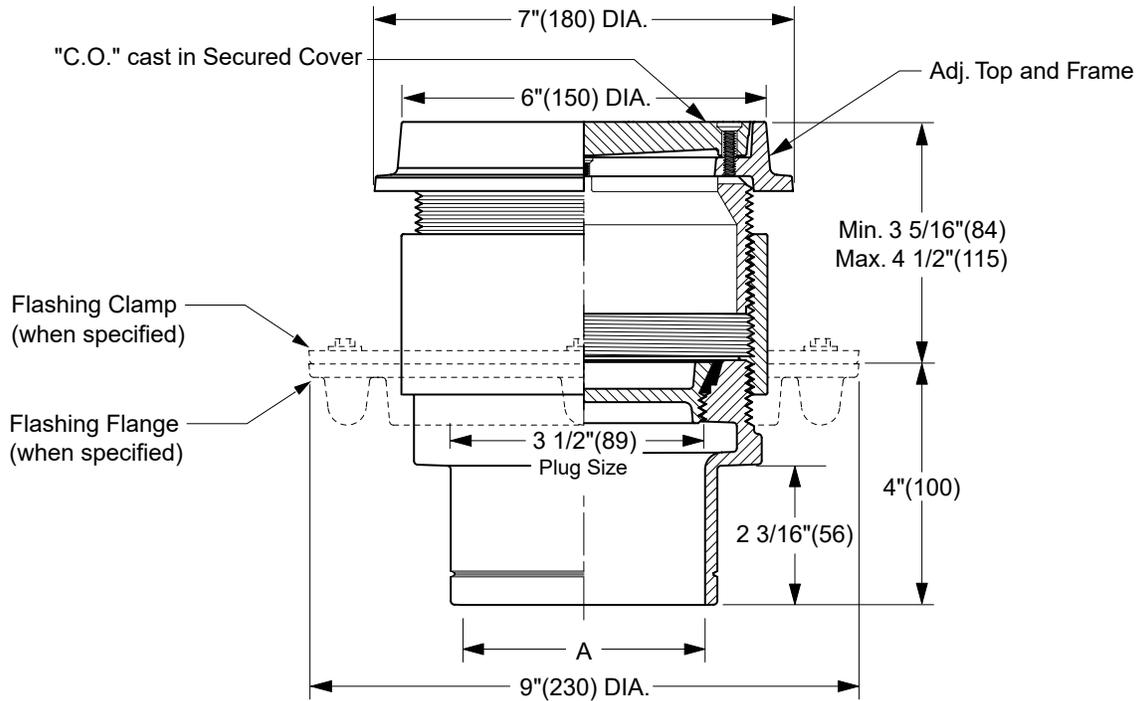

TWIS-TO-FLOOR® ADJUSTMENT

NO-HUB OUTLET

"A" (Pipe Size) = 02(50), 03(75) or 04(100)

Conforms to ASME A112.36.2/CSA B79.2

- Fig. 4220S.....Gasket Seal - ABS Plug
- Fig. 4221S.....Gasket Seal - Bronze Plug
- Fig. 4223S.....Taper Thread - Bronze Plug
- Fig. 4224S.....Taper Thread - ABS Plug

(Twis-to-Floor® design shown with gasketed plug.)

**NOTE:** Dimensions shown in parentheses are in millimeters.

**REGULARLY FURNISHED:**  
 Duco Cast Iron Cleanout with Round Adjustable Scoriated Secured Cast Iron Top. Closure Plug Type as Indicated by Figure Number Selected.

- VARIATIONS:**
- Flashing Flange -F
  - Flange with Flashing Clamp -F-C
  - Vandal Proof Top -U

- OPTIONAL MATERIALS:**
- Galvanized Cast Iron -G
  - Ductile Iron Cover -M

DRAWING NUMBER **S4220**  
 SIZE **A**  
 SCALE: **NONE**  
 DATE: **2-16-70**  
 APPROVED BY: **JM**  
 CHECKED BY: **BH**  
 DRAWN BY: **RK**  
**4220 SERIES**  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

R Q P N	4-11-24 08-17-23 05/08/07 12/17/04	Added ASME Note Removed Function Revised Outlet Text Added Width Dimension at Top	HS HS JJ JJ	CL CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	<b>FIGURE NUMBER</b> <h1 style="margin: 0;">4220 SERIES</h1>
REV.	DATE	DESCRIPTION	BY	CKD.BY			


C  
 DRAWING NUMBER S4220BS  
 SIZE A  
 SCALE: NONE  
 DATE: 5-5-06  
 APPROVED BY: CEL  
 CHECKED BY: CL  
 DRAWN BY: RN  
 4223  
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

# FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS FOR UNFINISHED AREAS

## ROUND HEAVY DUTY CAST IRON TOP

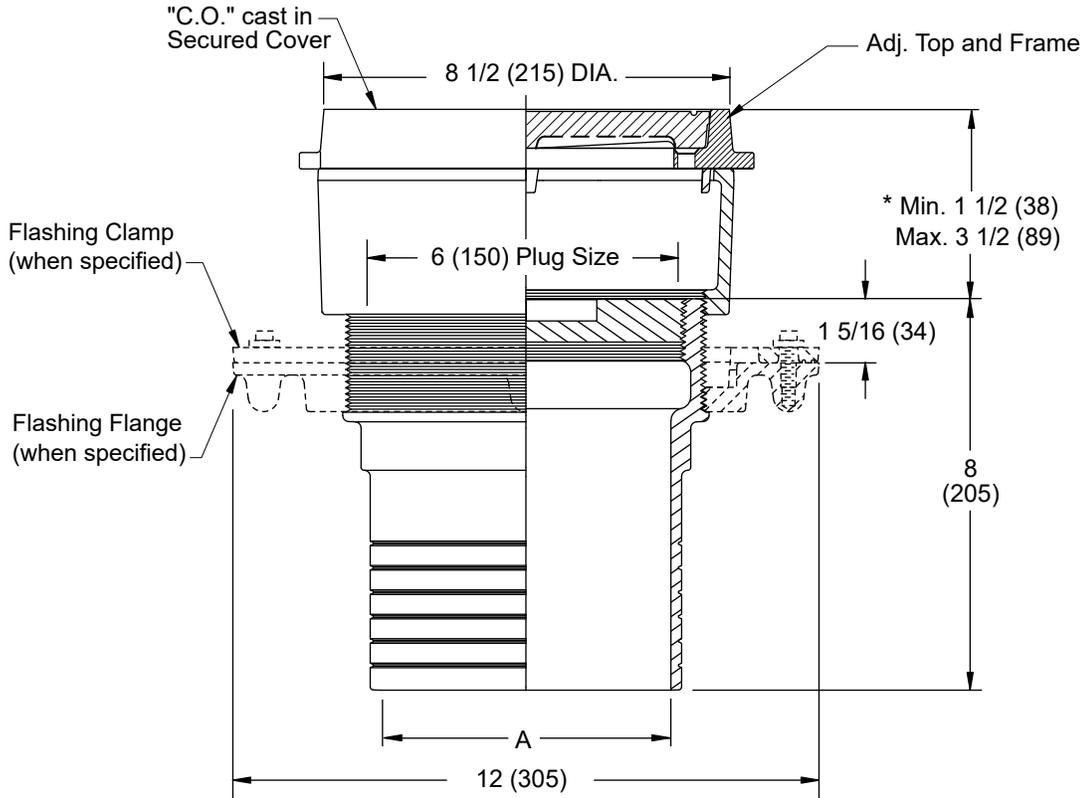

### SPIGOT OUTLET▲

"A" (Pipe Size) = 06(150) & 08(200)

Conforms to ASME A112.36.2/CSA B79.2

▲ Sized for Service Weight and/or NO-HUB.

\* When Flange-F is specified Min. 1 1/2 (38) becomes 2 (51)

### "TWIS-TO-FLOOR®" ADJUSTMENT

#### SPIGOT OUTLET▲

Fig. 4223S.....Taper Thread - Bronze Plug

#### REGULARLY FURNISHED:

Duco Cast Iron Cleanout with Taper Thread Bronze Plug and Round Adjustable Scoriated Secured Cast Iron Top.

#### VARIATIONS:

- Flashing Flange -F
- Flange with Flashing Clamp -F-C
- Vandal Proof Top -U

#### OPTIONAL MATERIALS:

- Galvanized Cast Iron -G
- Ductile Iron Cover-M (Extra Heavy Duty)

NOTE: Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
C	4-11-24	Added ASME Note	HS	CL			4223
B	8-17-23	Removed Function	HS	CL			
A	2-2-23	Revised Optional Material	KK	CL			